

0.8Ω Low-Voltage SPDT Analog Switch

UM4157 SOT363

General Description

The UM4157 is a low on resistance, low-power, Single Pole Double Throw (SPDT) analog switch. This product has been designed for switching audio signals in applications such as cell phones and portable media players. The ultra-low 0.8Ω impedance, sub μA current consumption, and 1.65V to 4.3V operating voltage range make this product ideal for battery-powered applications. The UM4157 also features bidirectional operation and break-before-make functionality. This device is fully specified for operation at 1.8V, 2.5V, and 3.3V.


Applications

- Cellular Phone
- PDA
- Portable Media Player


Features

- Typical 0.8Ω On Resistance (R_{ON}) for 2.7V Supply
- 0.23Ω Typical R_{ON} Flatness for 2.7V Supply
- Broad V_{CC} Operating Range: 1.65V to 4.3V
- Low THD (0.02% Typical for 32Ω Load)
- Control Logic is 1.8V CMOS Logic Compatible

Pin Configurations

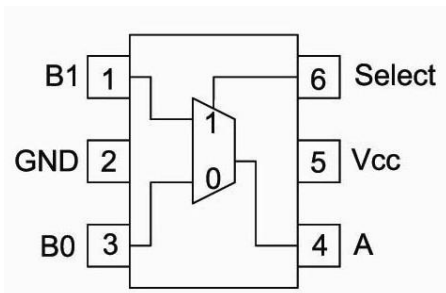

Top View



M: Month Code
UM4157
SOT363

Ordering Information

Part Number	Packaging Type	Marking Code	Shipping Qty
UM4157	SOT363	U7H	3000pcs/7 Inch Tape & Reel

Function Table

Select Input	Function
L	B0 Connected to A
H	B1 Connected to A

Absolute Maximum Ratings

Symbol	Parameter	Limit	Unit
V_{CC}	Supply Voltage	-0.5 to +5.5	V
V_S	DC Switch Voltage (Note 1)	-0.5 to ($V_{CC}+0.3$)	
V_{IN}	DC IN Voltage (Note 1)	-0.5 to $+V_{CC}$	
I_{IK}	DC Input Diode Current	-50	mA
I_{SW}	DC Switch Current	100	
I_{SWPEAK}	Peak Switch Current (Pulsed at 1ms Duration, <10% Duty Cycle)	150	
T_J	Junction Temperature Under Bias	+150	°C
T_{STG}	Storage Temperature Range	-65 to +150	
T_L	Junction Lead Temperature (Soldering, 10 Seconds)	+260	
ESD	Human Body Model	2000	V
P_D	SOT363 Package	180	mW

Note 1: The input and output negative voltage ratings may be exceeded if the input and output diode current ratings are observed.

Recommended Ratings

Symbol	Parameter	Limit	Unit
V_{CC}	Supply Voltage Operating	1.65 to 4.3	V
V_{IN}	Control Input Voltage (Note 2)	0 to V_{CC}	
V_{IN}	Switch Input Voltage	0 to V_{CC}	
T_A	Operating Temperature	-45 to +85	°C

Note 2: Unused inputs must be held HIGH or LOW, it must not float.

Electrical Characteristics

Symbol	Parameter	Test Conditions	V _{CC} (V)	Temp	Limits (-40°C to 85°C)			Unit
					Min	Typ	Max	
DC Electrical Characteristics								
I _{IN}	Control Leakage Current	0 ≤ V _{IN} ≤ V _{CC}	1.65 to 4.3	Full	-0.5		+0.5	μA
I _{OFF(NO/NC)}	OFF State Leakage Current	A=0.3V, V _{CC} =0.3V, B ₀ or B ₁ =0.3V, V _{CC} =0.3V or Floating	1.95 to 4.3	Room Full	-10 -50		+10 +50	nA
I _{ON(A)}	On State Leakage Current	A=0.3V, V _{CC} =0.3V, B ₀ or B ₁ =0.3V, V _{CC} =0.3V or Floating	1.95 to 4.3	Room Full	-20 -100		+20 +100	nA
V _{IH}	Input High Voltage		3.6 to 4.3	Full	1.4			V
			2.7 to 3.6		1.3			
			2.3 to 2.7		1.1			
			1.65 to 1.95		0.9			
V _{IL}	Input Low Voltage		3.6 to 4.3	Full			0.7	V
			2.7 to 3.6				0.5	
			2.3 to 2.7				0.4	
			1.65 to 1.95				0.4	
I _{CC}	Quiescent Supply Current	V _{IN} = V _{CC} or GND I _O =0	4.3	Full	-3		3	μA
R _{ON}	On-Resistance (Note 3)	I _{OUT} =100mA, B ₀ or B ₁ =0V,0.7V,3.6V,4.3V	4.3	Full		0.6	1.0	Ω
		I _{OUT} =100mA, B ₀ or B ₁ =0V,0.7V,2.0V,2.7V	2.7	Full		0.8	1.2	
		I _{OUT} =100mA, B ₀ or B ₁ =0V, 0.7V, 2.0V,2.3V	2.3	Full		0.9	1.3	
		I _{OUT} =100mA, B ₀ or B ₁ =0.7V	1.65	Room Full		1.5	2.5 3.0	
ΔR _{ON}	On Resistance Match Between Channels (Note 4)	I _{OUT} =100mA, B ₀ or B ₁ =0.7V	4.3	Full		0.04	0.75	Ω
			2.7	Full		0.06	0.13	
			2.3	Full		0.12	0.20	
			1.65	Full		1.0		
R _{FLAT}	On Resistance Flatness (Note 5)	I _{OUT} =100mA, B ₀ or B ₁ =0V to V _{CC}	4.3	Full		0.18	0.5	Ω
			2.7	Full		0.23	0.5	
			2.3	Full		0.28	0.6	
			1.65	Room		0.3		

Note 3: Measured by the voltage drop between A and B pins at the indicated current through the switch. On Resistance is determined by the lower of the voltages on the two (A or B Ports).

Note 4: ΔR_{ON} = | R_{ON(B0)} - R_{ON(B1)} | measured at identical V_{CC}, temperature and voltage levels.

Note 5: Flatness is defined as the difference between the maximum and minimum value of On Resistance over the specified range of input voltage.

Electrical Characteristics (Continued)

Symbol	Parameter	Test Conditions	V _{CC} (V)	Temp	Limits (-40°C to 85°C)			Unit
					Min	Typ	Max	
AC Electrical Characteristics								
t _{ON}	Turn-On Time	B ₀ or B ₁ =1.5V, R _L =50Ω, C _L =35pF	3.6 to 4.3	Room Full			55 60	ns
			2.7 to 3.6	Room Full			60 65	
			2.3 to 2.7	Room Full			65 70	
			1.65 to 1.95	Full		70	90	
t _{OFF}	Turn-Off Time	B ₀ or B ₁ =1.5V, R _L =50Ω, C _L =35pF	3.6 to 4.3	Room Full			30 35	ns
			2.7 to 3.6	Room Full			35 40	
			2.3 to 2.7	Room Full			40 45	
			1.65 to 1.95	Full		40	55	
t _{BMM}	Break Before Make Time	B ₀ or B ₁ =1.5V, R _L =50Ω, C _L =35pF	1.65 to 4.3	Full	5			ns
Q _{INJ}	Charge Injection	C _L =1.0nF, V _{GEN} =0V R _{GEN} =0Ω	3.6 to 4.3	Room		6		pC
			2.7 to 3.6	Room		6		
			2.3 to 2.7	Room		6		
			1.65 to 1.95	Room				
O _{IRR}	Off Isolation	f=100kHz, R _L =50Ω, C _L =5pF (Stray)	1.65 to 4.3	Room		-75		dB
Xtalk	Crosstalk	f=100kHz, R _L =50Ω, C _L =5pF (Stray)	3.6 to 4.3	Room		-75		dB
			2.7 to 3.6	Room		-75		
			2.3 to 2.7	Room		-75		
			1.65 to 1.95	Room		-70		
BW	-3dB Bandwidth	R _L =50Ω	1.65 to 4.3	Room		70		MHz
THD	Total Harmonic Distortion		3.6 to 4.3					%
		R _L =32Ω, V _{IN} =2V _{P-P} f=20Hz to 20kHz	2.7 to 3.6	Room		0.02		
		R _L =32Ω, V _{IN} =1.5V _{P-P} f=20Hz to 20kHz	2.3 to 2.7	Room		0.036		
		R _L =32Ω, V _{IN} =1.2V _{P-P} f=20Hz to 20kHz	1.65 to 1.95	Room		0.01		
Capacitance								
C _{IN}	Control Pin Input Capacitance	f=1MHz	0.0	Room		1.5		pF
C _{IO-B}	B Port Off Capacitance	f=1MHz	4.5	Room		21.0		pF
C _{IOA-ON}	A Port Capacitance when Switch is Enabled	f=1MHz	4.5	Room		90.0		pF

Typical Operating Characteristics

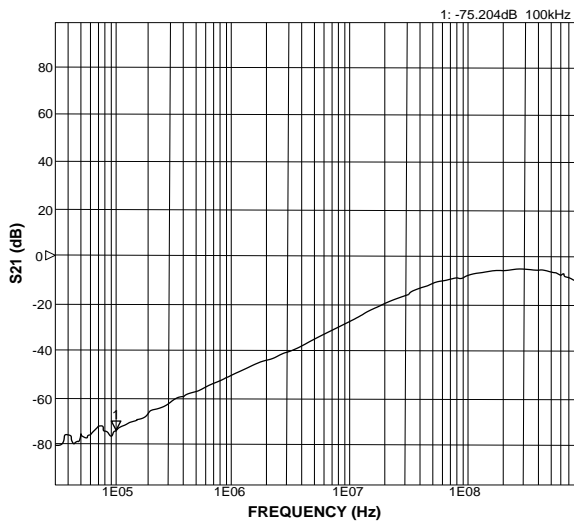


Figure 1. Off-Isolation at $V_{CC}=3.3V$

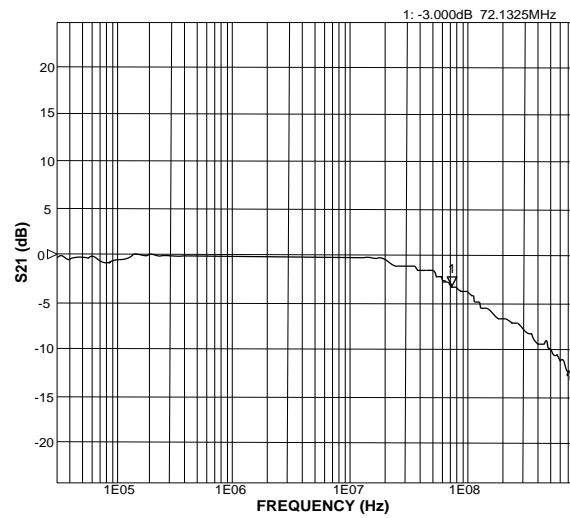


Figure 2. Bandwidth at $V_{CC}=3.3V$

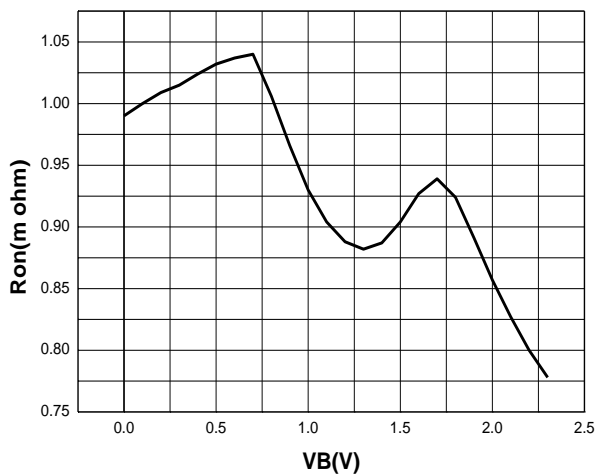


Figure 3. Switch On Resistance, $I_{on}=100mA$, $V_{CC}=2.3V$, B1

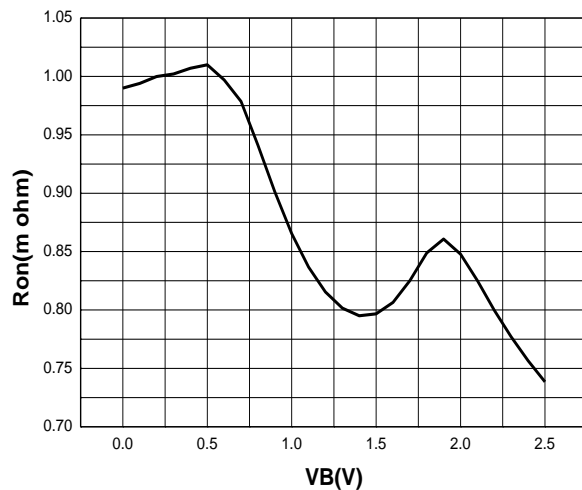


Figure 4. Switch On Resistance, $I_{on}=100mA$, $V_{CC}=2.5V$, B1



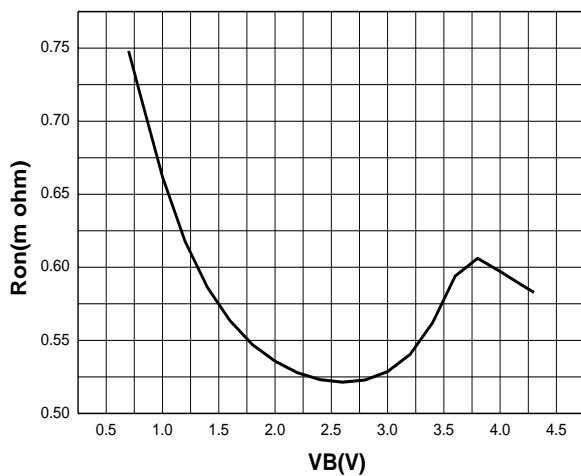


Figure 5. Switch On Resistance, $I_{on}=100mA$, $V_{CC}=4.3V$, B1



Test Circuits/Timing Diagrams

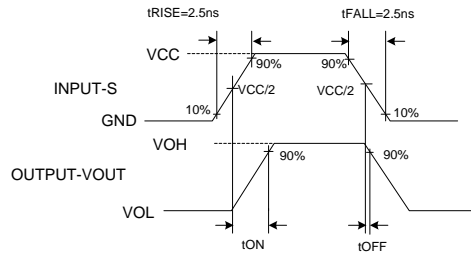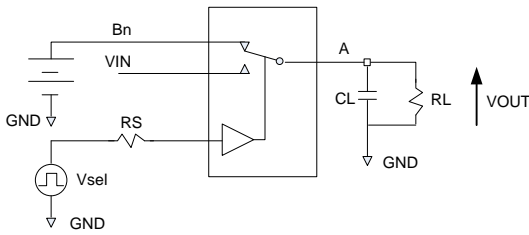

Note 6: R_L , R_S and C_L are functions of the application environment. (see AC Electrical table for specific values)


Note 7: C_L includes test fixture and stray capacitance.

Figure 6. Turn-Off Timing

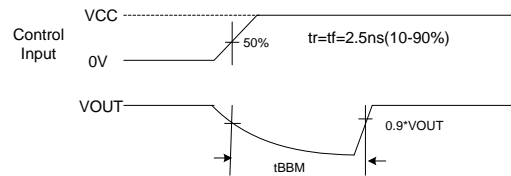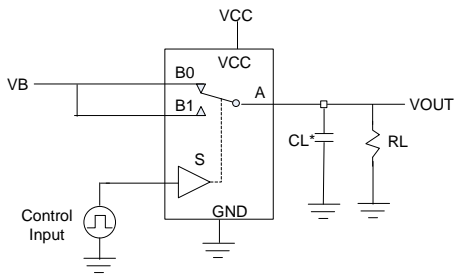

C_L^* includes fixture and stray capacitance

Figure 7. Break-Before-Make Timing

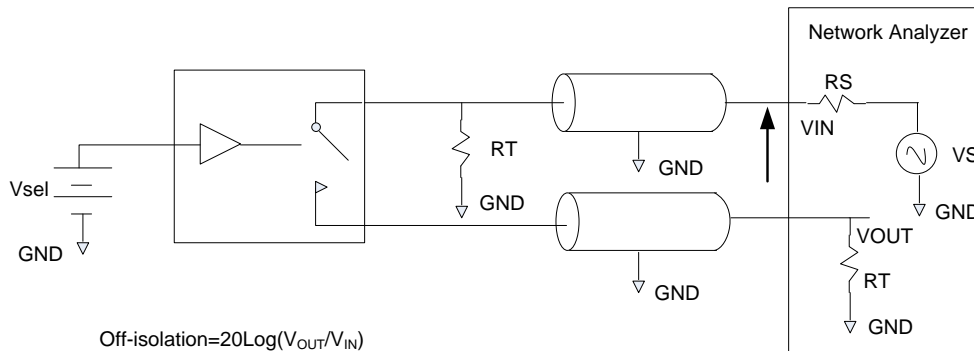

Off-isolation= $20\text{Log}(V_{OUT}/V_{IN})$

Figure 8. Off-Isolation

Test Circuits/Timing Diagrams (Continued)

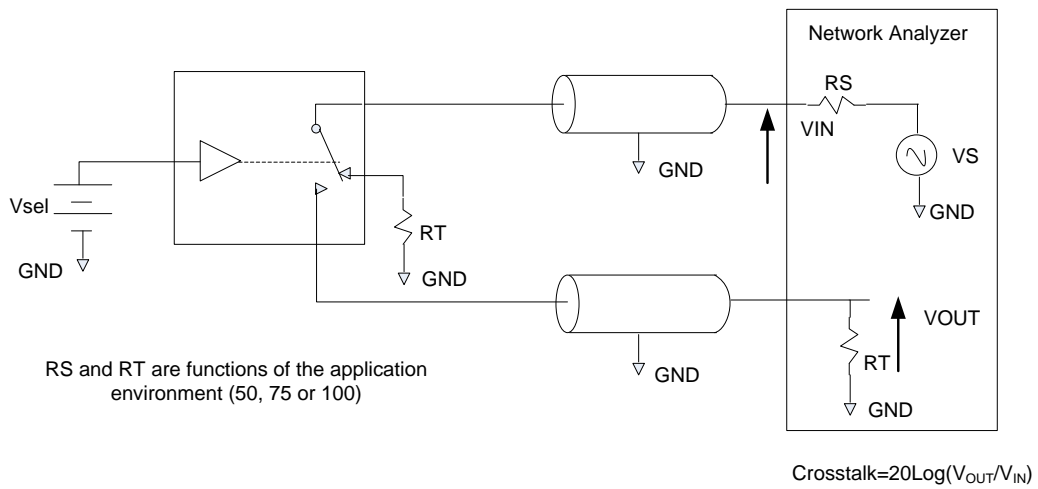


Figure 9. Non-Adjacent Channel-to-Channel Crosstalk

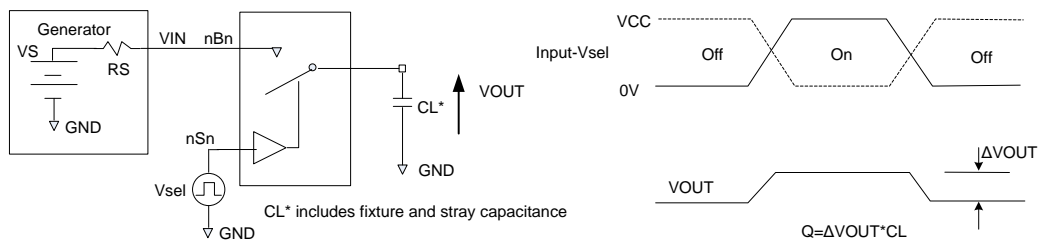


Figure 10. Charge Injection Test

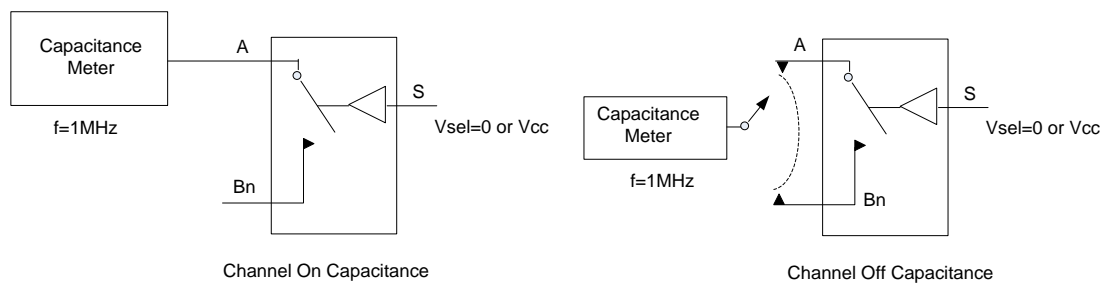


Figure 11. On/Off Capacitance Measurement Setup

Test Circuits/Timing Diagrams (Continued)

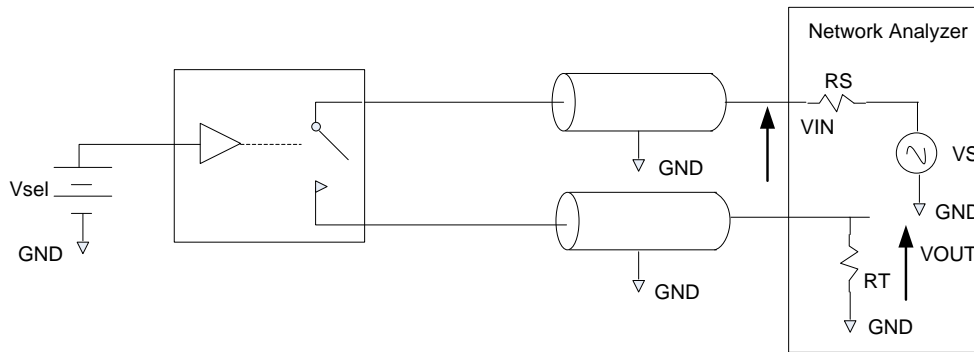


Figure 12. Bandwidth


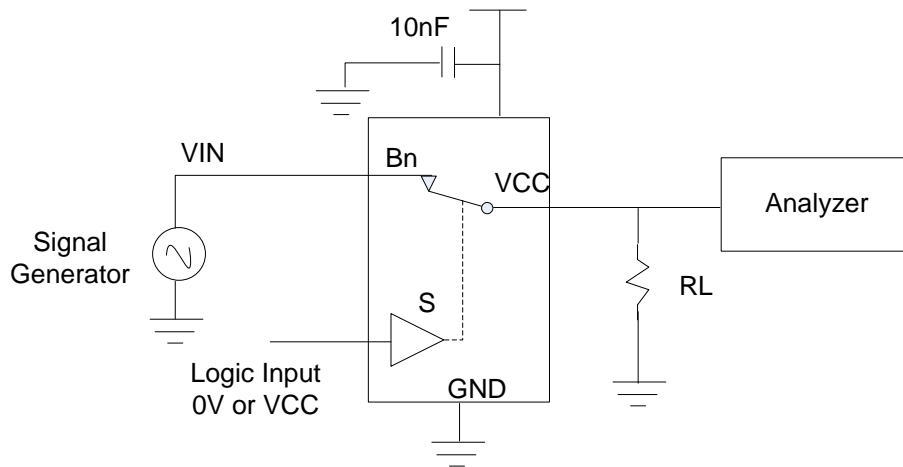


Figure 13. Harmonic Distortion


Package Information

UM4157 SOT363


Outline Drawing

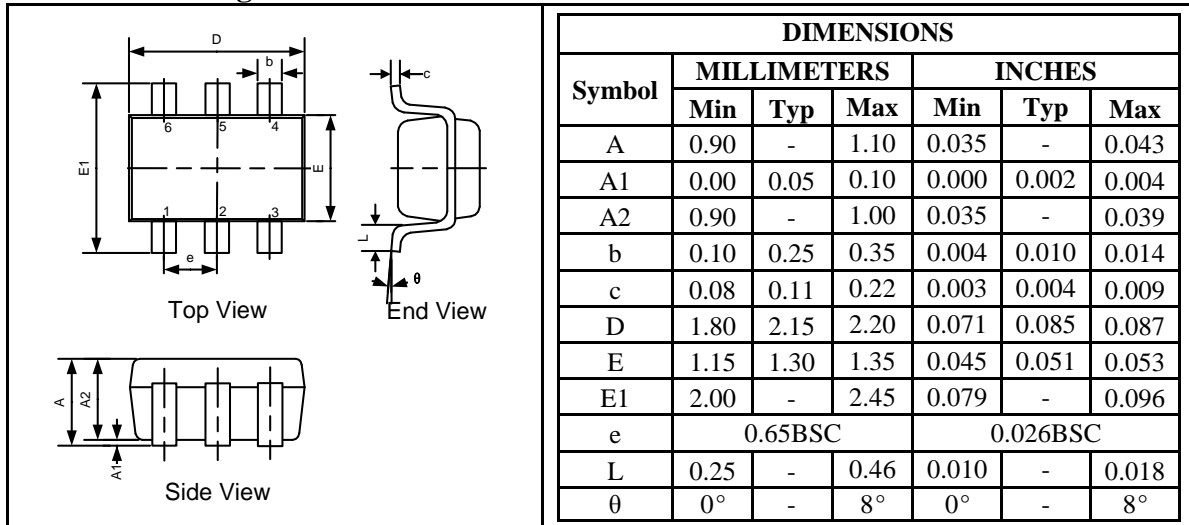

Land Pattern

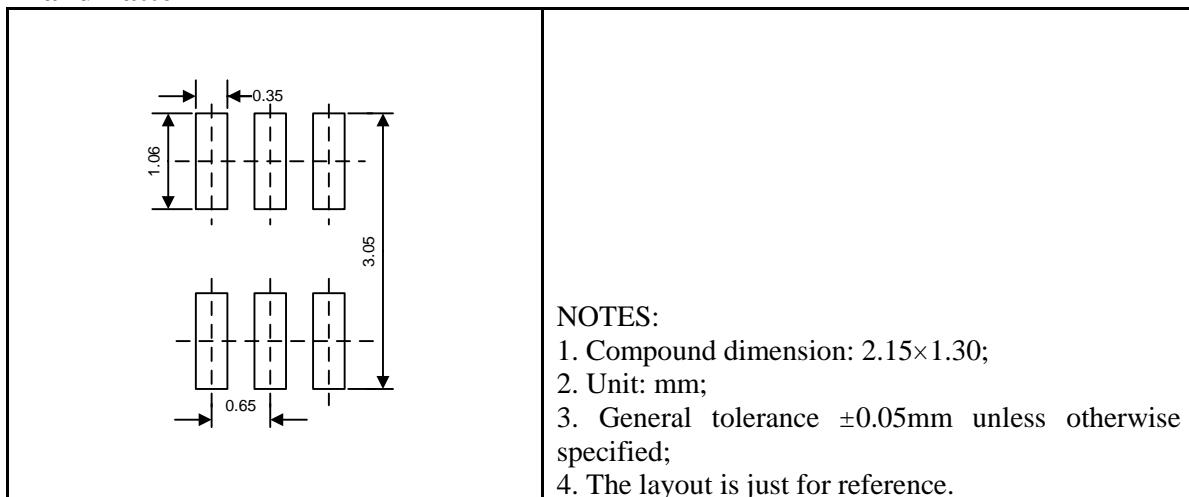

Tape and Reel Orientation

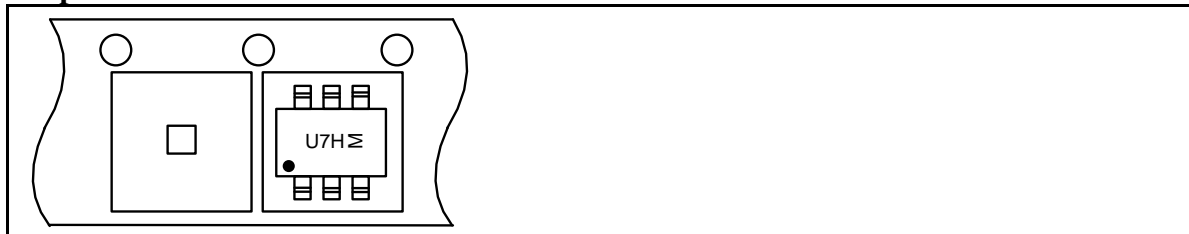

GREEN COMPLIANCE

Union Semiconductor is committed to environmental excellence in all aspects of its operations including meeting or exceeding regulatory requirements with respect to the use of hazardous substances. Numerous successful programs have been implemented to reduce the use of hazardous substances and/or emissions.

All Union components are compliant with the RoHS directive, which helps to support customers in their compliance with environmental directives. For more green compliance information, please visit:

http://www.union-ic.com/index.aspx?cat_code=RoHSDeclaration

IMPORTANT NOTICE

The information in this document has been carefully reviewed and is believed to be accurate. Nonetheless, this document is subject to change without notice. Union assumes no responsibility for any inaccuracies that may be contained in this document, and makes no commitment to update or to keep current the contained information, or to notify a person or organization of any update. Union reserves the right to make changes, at any time, in order to improve reliability, function or design and to attempt to supply the best product possible.



Union Semiconductor, Inc

Add: Unit 606, No.570 Shengxia Road, Shanghai 201210

Tel: 021-51093966

Fax: 021-51026018

Website: www.union-ic.com