

300mA、低功耗、宽输入电压线性稳压器

UM1451S-xx SOT23-3

UM1451Y-xx SOT89-3

UM1451B-xx SOT89-3

UM1461S-xx SOT23-5

UM1461Y-xx SOT89-5

描述

UM1451/UM1461系列是正电压输出、高精度、低功耗的电压稳压器。该器件的最大输入电压是24V，输出电压范围在2.5V至5V内，电压步长为100mV，可以根据需求定制。

UM1451/UM1461系列极低功耗可以极大延长电池寿命 ($I_Q=3.5\mu A$)。

UM1451系列采用扁平SOT23-3和SOT89-3封装，UM1461采用SOT23-5和SOT89-5封装。

应用


- 电池供电设备
- MP3、PDA、DSC、鼠标、PS2 游戏机的电源管理
- 基准电压源
- 手持设备









特性


- 最大输入电压：24V
- 低静态电流：3.5 μA (典型值)
- 最大输出电流：300mA
- 低压差：
250mV ($V_{OUT}=3.3V$, 100mA 时)
500mV ($V_{OUT}=3.3V$, 200mA 时)
- 低温度系数： $\pm 150ppm/^{\circ}C$
- 输出电流限制：400mA ($V_{OUT}=3.3V$ 时)

引脚配置

俯视图

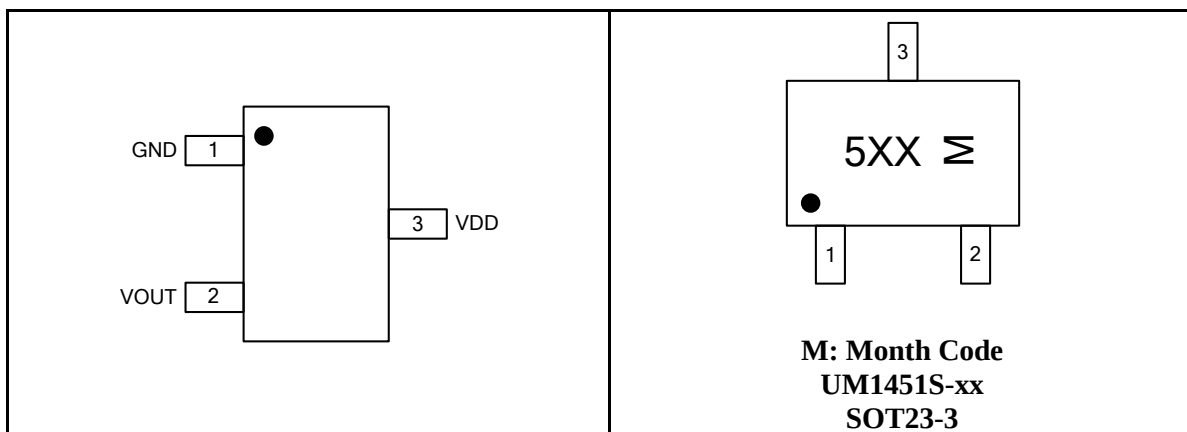

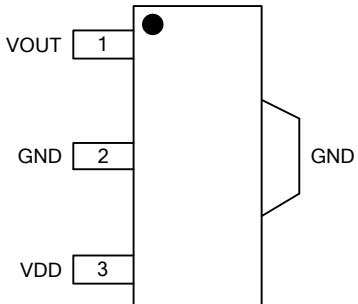 TAB Connected to Pin 2	 WW: Week Code UM1451Y-xx SOT89-3
 TAB Connected to Pin 2	 WW: Week Code UM1451B-xx SOT89-3
	 M: Month Code UM1461S-xx SOT23-5
	 M: Month Code UM1461S-00 SOT23-5

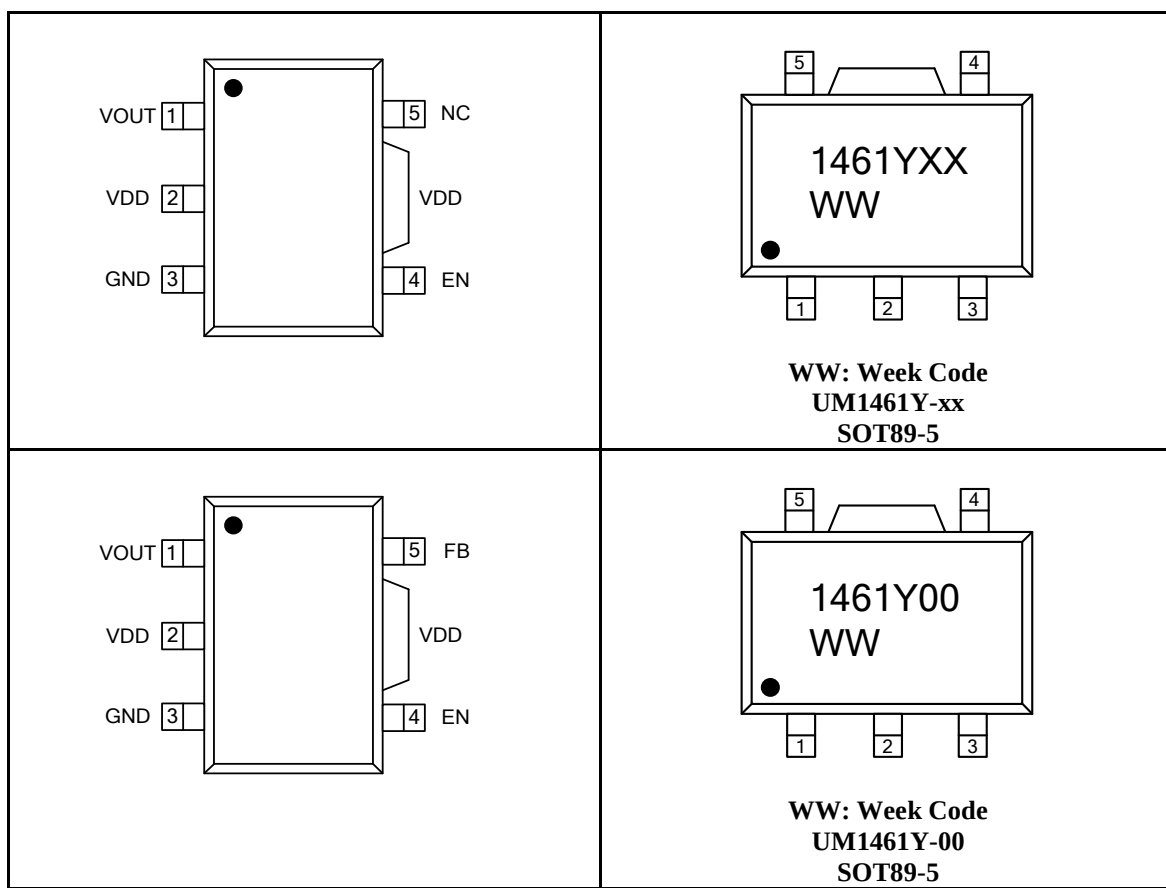

Ordering Information

UM1451 □-□□

- Output Voltage
25=2.5V
33=3.3V
- Package Type
S: SOT23-3
Y(B): SOT89-3

UM1461 □-□□

- 00: Adjustable Output Voltage
Fixed Output Voltage
25=2.5V
33=3.3V
- Package Type
S: SOT23-5
Y: SOT89-5

Marking Information

Part Number	Output Voltage	Packaging Type	Marking Code	Shipping Qty
UM1451S-25	2.5V	SOT23-3	5M2	3000pcs/7Inch Tape & Reel
UM1451S-26	2.6V		5MB	
UM1451S-27	2.7V		5MC	
UM1451S-28	2.8V		5MD	
UM1451S-29	2.9V		5ME	
UM1451S-30	3.0V		5MF	
UM1451S-31	3.1V		5MH	
UM1451S-32	3.2V		5ML	
UM1451S-33	3.3V		5MM	
UM1451S-34	3.4V		5MJ	
UM1451S-35	3.5V		5MK	
UM1451S-36	3.6V		5MN	
UM1451S-37	3.7V		5MP	
UM1451S-38	3.8V		5MQ	
UM1451S-39	3.9V		5MR	
UM1451S-40	4.0V		5MS	
UM1451S-41	4.1V		5MT	
UM1451S-42	4.2V		5MY	
UM1451S-43	4.3V		5MU	
UM1451S-44	4.4V		5MZ	
UM1451S-45	4.5V		5U5	
UM1451S-46	4.6V		5U6	
UM1451S-47	4.7V		5U7	
UM1451S-48	4.8V		5U8	
UM1451S-49	4.9V		5U9	
UM1451S-50	5.0V		5UA	
UM1451Y-25	2.5V	SOT89-3 (Tab connected to VDD)	1451Y25	1000pcs/7Inch Tape & Reel
UM1451Y-26	2.6V		1451Y26	
UM1451Y-27	2.7V		1451Y27	
UM1451Y-28	2.8V		1451Y28	
UM1451Y-29	2.9V		1451Y29	
UM1451Y-30	3.0V		1451Y30	
UM1451Y-31	3.1V		1451Y31	
UM1451Y-32	3.2V		1451Y32	
UM1451Y-33	3.3V		1451Y33	
UM1451Y-34	3.4V		1451Y34	
UM1451Y-35	3.5V		1451Y35	
UM1451Y-36	3.6V		1451Y36	
UM1451Y-37	3.7V		1451Y37	
UM1451Y-38	3.8V		1451Y38	
UM1451Y-39	3.9V		1451Y39	
UM1451Y-40	4.0V		1451Y40	
UM1451Y-41	4.1V		1451Y41	
UM1451Y-42	4.2V		1451Y42	
UM1451Y-43	4.3V		1451Y43	
UM1451Y-44	4.4V		1451Y44	
UM1451Y-45	4.5V		1451Y45	
UM1451Y-46	4.6V		1451Y46	
UM1451Y-47	4.7V		1451Y47	
UM1451Y-48	4.8V		1451Y48	
UM1451Y-49	4.9V		1451Y49	
UM1451Y-50	5.0V		1451Y50	

Marking Information (Continued)

Part Number	Output Voltage	Packaging Type	Marking Code	Shipping Qty
UM1451B-25	2.5V	SOT89-3 (Tab connected to GND)	1451B25	1000pcs/7Inch Tape & Reel
UM1451B-26	2.6V		1451B26	
UM1451B-27	2.7V		1451B27	
UM1451B-28	2.8V		1451B28	
UM1451B-29	2.9V		1451B29	
UM1451B-30	3.0V		1451B30	
UM1451B-31	3.1V		1451B31	
UM1451B-32	3.2V		1451B32	
UM1451B-33	3.3V		1451B33	
UM1451B-34	3.4V		1451B34	
UM1451B-35	3.5V		1451B35	
UM1451B-36	3.6V		1451B36	
UM1451B-37	3.7V		1451B37	
UM1451B-38	3.8V		1451B38	
UM1451B-39	3.9V		1451B39	
UM1451B-40	4.0V		1451B40	
UM1451B-41	4.1V		1451B41	
UM1451B-42	4.2V		1451B42	
UM1451B-43	4.3V		1451B43	
UM1451B-44	4.4V		1451B44	
UM1451B-45	4.5V		1451B45	
UM1451B-46	4.6V		1451B46	
UM1451B-47	4.7V		1451B47	
UM1451B-48	4.8V		1451B48	
UM1451B-49	4.9V		1451B49	
UM1451B-50	5.0V		1451B50	

Marking Information (Continued)

Part Number	Output Voltage	Packaging Type	Marking Code	Shipping Qty
UM1461S-00	ADJ	SOT23-5	6GK	3000pcs/7Inch Tape & Reel
UM1461S-25	2.5V		6DC	
UM1461S-26	2.6V		6DD	
UM1461S-27	2.7V		6DE	
UM1461S-28	2.8V		6DF	
UM1461S-29	2.9V		6DH	
UM1461S-30	3.0V		6DL	
UM1461S-31	3.1V		6DM	
UM1461S-32	3.2V		6DJ	
UM1461S-33	3.3V		6DK	
UM1461S-34	3.4V		6DN	
UM1461S-35	3.5V		6DP	
UM1461S-36	3.6V		6DQ	
UM1461S-37	3.7V		6DR	
UM1461S-38	3.8V		6DS	
UM1461S-39	3.9V		6DT	
UM1461S-40	4.0V		6DY	
UM1461S-41	4.1V		6DU	
UM1461S-42	4.2V		6DZ	
UM1461S-43	4.3V		6GC	
UM1461S-44	4.4V		6GD	
UM1461S-45	4.5V		6GE	
UM1461S-46	4.6V		6GF	
UM1461S-47	4.7V		6GH	
UM1461S-48	4.8V		6GL	
UM1461S-49	4.9V		6GM	
UM1461S-50	5.0V		6GJ	

Marking Information (Continued)

Part Number	Output Voltage	Packaging Type	Marking Code	Shipping Qty
UM1461Y-00	ADJ	SOT89-5 (Tab connected to VDD)	1461Y00	1000pcs/7Inch Tape & Reel
UM1461Y-25	2.5V		1461Y25	
UM1461Y-26	2.6V		1461Y26	
UM1461Y-27	2.7V		1461Y27	
UM1461Y-28	2.8V		1461Y28	
UM1461Y-29	2.9V		1461Y29	
UM1461Y-30	3.0V		1461Y30	
UM1461Y-31	3.1V		1461Y31	
UM1461Y-32	3.2V		1461Y32	
UM1461Y-33	3.3V		1461Y33	
UM1461Y-34	3.4V		1461Y34	
UM1461Y-35	3.5V		1461Y35	
UM1461Y-36	3.6V		1461Y36	
UM1461Y-37	3.7V		1461Y37	
UM1461Y-38	3.8V		1461Y38	
UM1461Y-39	3.9V		1461Y39	
UM1461Y-40	4.0V		1461Y40	
UM1461Y-41	4.1V		1461Y41	
UM1461Y-42	4.2V		1461Y42	
UM1461Y-43	4.3V		1461Y43	
UM1461Y-44	4.4V		1461Y44	
UM1461Y-45	4.5V		1461Y45	
UM1461Y-46	4.6V		1461Y46	
UM1461Y-47	4.7V		1461Y47	
UM1461Y-48	4.8V		1461Y48	
UM1461Y-49	4.9V		1461Y49	
UM1461Y-50	5.0V		1461Y50	

Pin Description

Symbol	Function
GND	Ground
VOUT	Voltage Regulated Output
EN	Enable Control Input: High=Activate LDO, Low=Shutdown LDO
VDD	Supply Voltage Input
FB	Output Voltage Feedback

Absolute Maximum Ratings (Note 1)

Symbol	Parameter	Value	Unit
V _{IN}	Max Input Voltage	28	V
P _D	Power Dissipation	SOT23-3	250
		SOT23-5	300
		SOT89-3	1000
		SOT89-5	1200
T _J	Operating Junction Temperature	+125	℃
T _A	Ambient Temperature	-40 to +85	℃
T _{STG}	Storage Temperature Range	-40 to +150	℃
T _L	Lead Temperature for Soldering 10 Seconds	+260	℃

Note 1: Exposure to absolute maximum rating conditions may affect device reliability.

Recommended Work Condition

Symbol	Parameter	Value	Unit
V _{IN}	Max Input Voltage	24	V

Electrical Characteristics

(Test conditions: $C_{IN}=1.0\mu F$, $C_{OUT}=1.0\mu F$, $T_A=25\text{ }^{\circ}\text{C}$, unless otherwise noted)

Symbol	Parameter	Test Conditions	Min	Typ	Max	Unit
V_{IN}	Input Voltage		3.6		24	V
V_{OUT}	Output Voltage	$V_{IN}=\text{Set } V_{OUT}+1V$ $1mA \leq I_{OUT} \leq 10mA$	$V_{OUT} \times 0.98$	$V_{OUT} \times 1.0$	$V_{OUT} \times 1.02$	V
V_{FB}	Feedback Reference Voltage	$V_{IN}=3.6V$ to $24V$	1.176	1.2	1.224	V
I_{FB}	Feedback Reference Current	$V_{FB}=1.2V$			10	nA
$I_{OUT}(\text{Max})$ (Note 2)	Maximum Output Current	$V_{IN}-V_{OUT}=1V$	300			mA
V_{DROP}	Dropout Voltage	$I_{OUT}=150mA$		380		mV
	Output Voltage Accuracy	$I_{OUT}=300mA$	-3		+3	%
$\frac{\Delta V_{OUT}}{\Delta V_{IN} \cdot V_{OUT}}$	Line Regulation	$I_{OUT}=10mA$ $4V \leq V_{DD} \leq 6V$		0.05	0.2	%/V
ΔV_{OUT}	Load Regulation	$V_{IN}=\text{Set } V_{OUT}+1V$ $1mA \leq I_{OUT} \leq 300mA$		20		mV
I_S	Supply Current	$V_{IN}=\text{Set } V_{OUT}+1V$ V_{OUT} Floating		3.5	5	μA
	Shut Down Quiescent Current	$V_{IN}=8V$, $EN= GND$			1	μA
I_{EN}	EN Input Current	$EN=V_{IN}$ or GND			1	μA
$\frac{\Delta V_{OUT}}{\Delta T \cdot V_{OUT}}$	Output Voltage Noise	$I_{OUT}=10mA$		± 150		ppm/ $^{\circ}\text{C}$
I_{LIMIT}	Output Current Limit	$R_L=1\Omega$	350	450	600	mA
t	Startup Time Response	$V_{OUT}=3.3V$, $R_L=68\Omega$, $C_{OUT}=1\mu F$		80		μs
V_{IL}	EN Input Low Voltage	$V_{IN}=3.6V$ to $24V$			0.8	V
V_{IH}	EN Input High Voltage	$V_{IN}=3.6V$ to $24V$	1.8			V
PSRR	Power Supply Ripple Rejection	Ripple=1 Vp-p, $V_{IN}=\text{Set } V_{OUT}+1V$	f=100Hz	72		dB
			f=1kHz	71		
			f=10kHz	56		
	Output Noise	BW=10Hz~100kHz $V_{out}=2.5V$		80		μV_{RMS}

Note 2: The maximum power rating of each package is constant, so along with the change of I_{LOAD} , the $V_{IN}-V_{OUT}$ should be controlled to a certain range to ensure the normal operation.

Typical Application Circuit

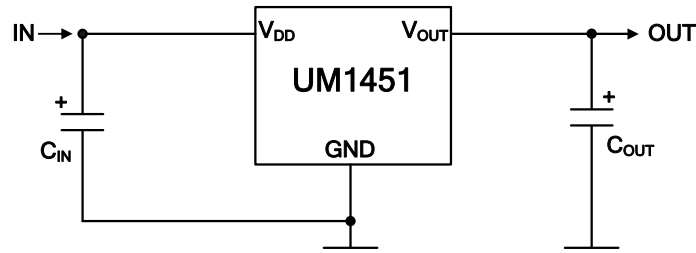


Figure 1

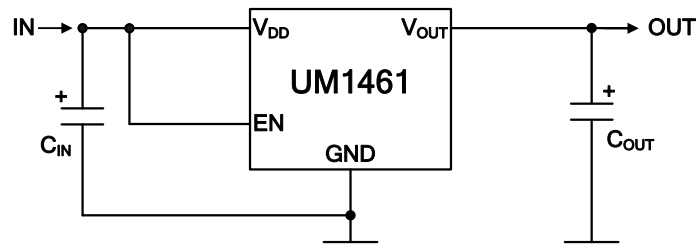


Figure 2

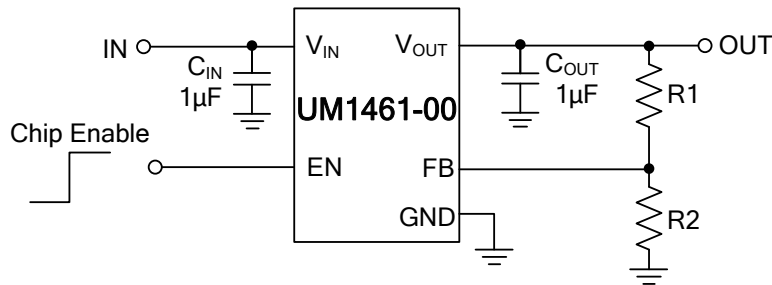


Figure 3

Note 3: Input Capacitor ($C_{IN}=1\mu F$) is recommended in all applications.

Note 4: Output Capacitor ($C_{OUT}=4.7\mu F/6.8\mu F$) is recommended in all applications to assure the stability of circuit.

UM1461S-00/UM1461Y-00 Output Voltage Setting

The output voltage of the UM1461 adjustable regulator is programmed using an external resistor divider as shown in Figure 3. The output voltage is calculated using:

$$V_{OUT} = V_{FB} \left(1 + \frac{R1}{R2} \right)$$







Where: $V_{FB}=1.2V$ (Typ) (the internal reference voltage)

Resistors R1 and R2 should be chosen for approximately 3-5μA divider current. Lower value resistors can be used but offer no inherent advantage and waste more power. Higher values should be avoided, as leakage currents at FB increase the output voltage error. The recommended design procedure is to choose $R2=200k\Omega$ to set the divider current at 5μA and then calculate R1 using:

$$R1 = \left(\frac{V_{OUT}}{V_{FB}} - 1 \right) \times R2$$


Where: $V_{FB}=1.2V$ (Typ).

Typical Operating Characteristics

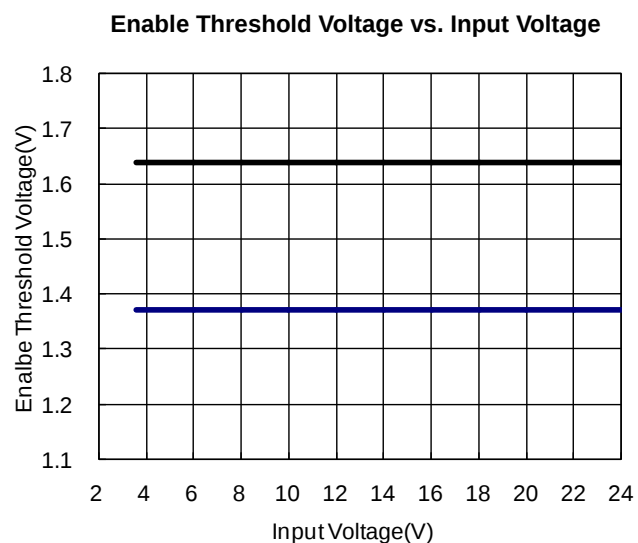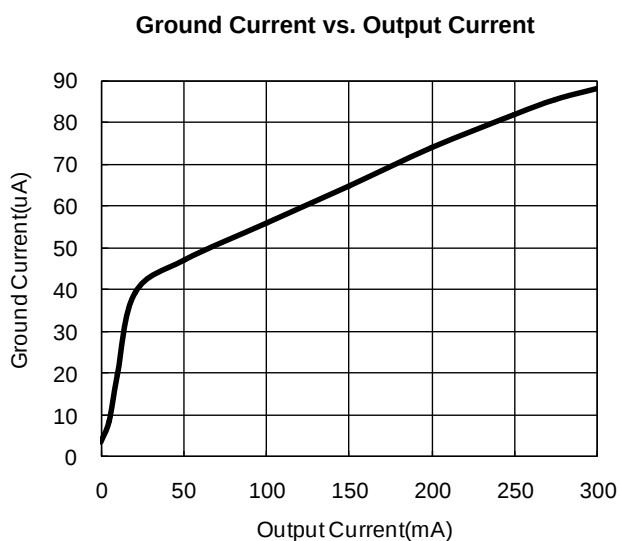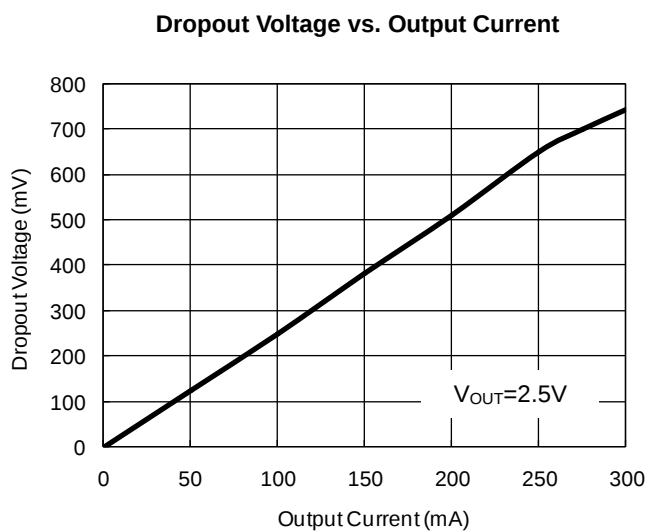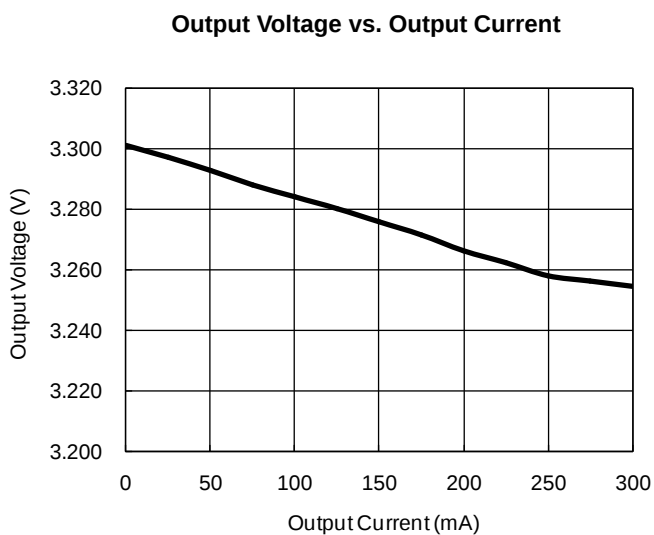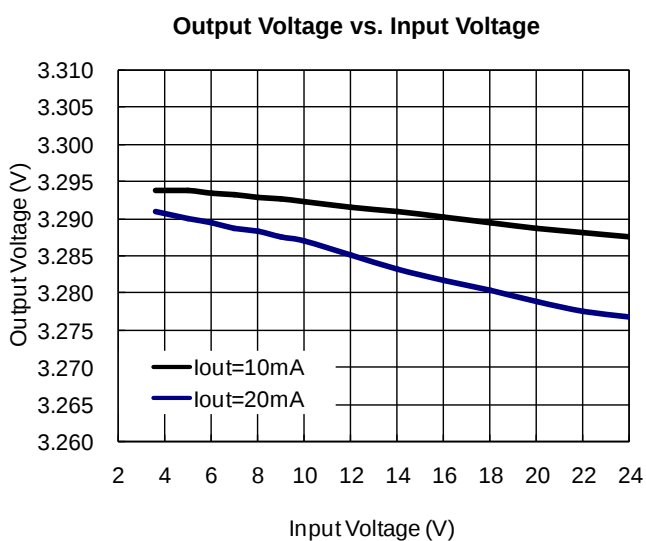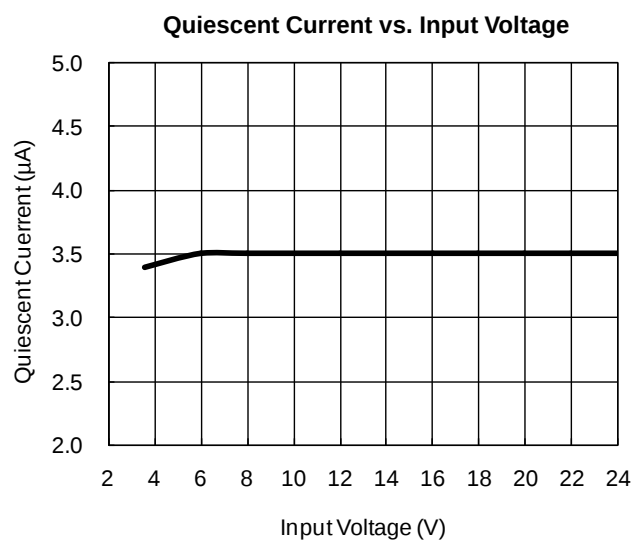


Typical Operating Characteristics (Continued)


Output Voltage vs. Temperature

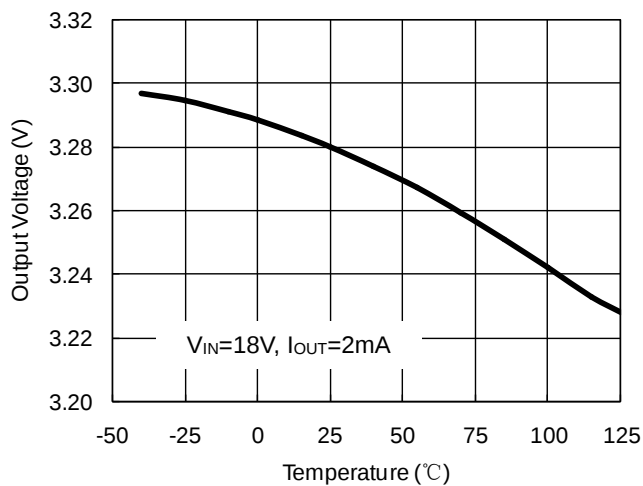


Quiescent Current vs. Temperature

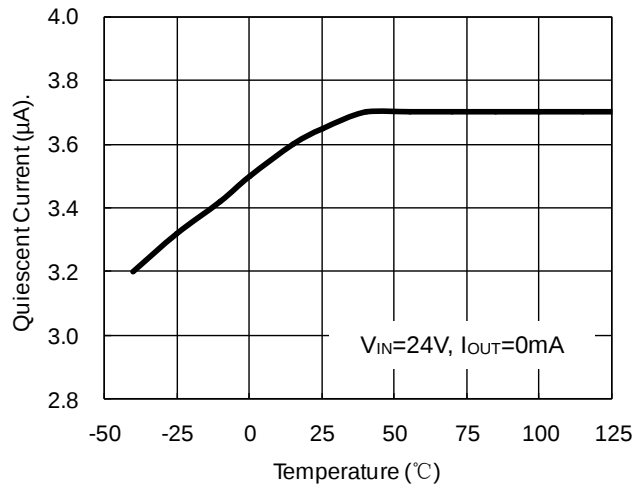


PSRR vs. Frequency

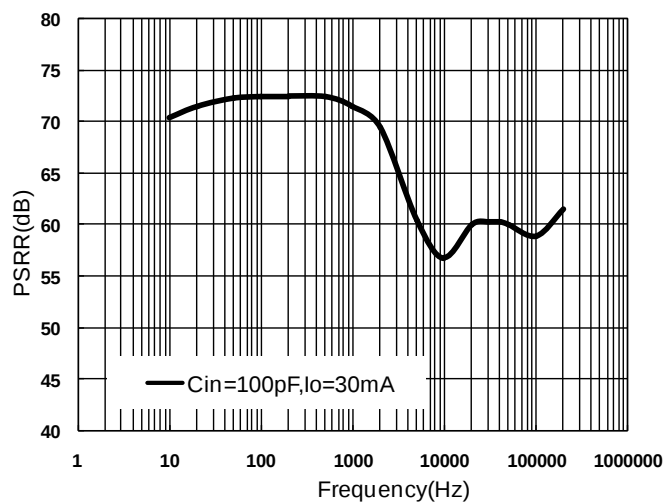


Line Transient Response

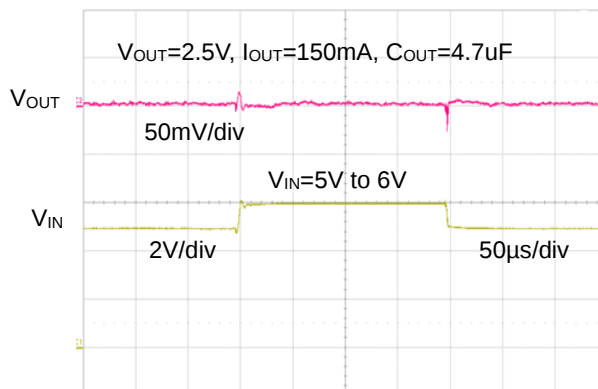

Load Transient Response

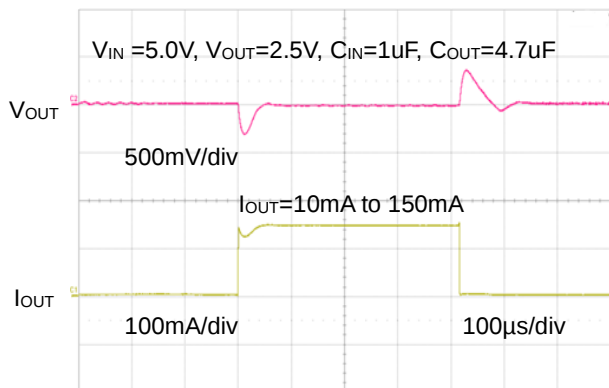


Noise

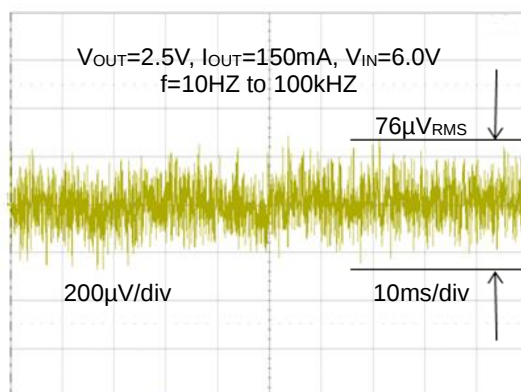


Package Information

UM1451S-xx: SOT23-3


Outline Drawing

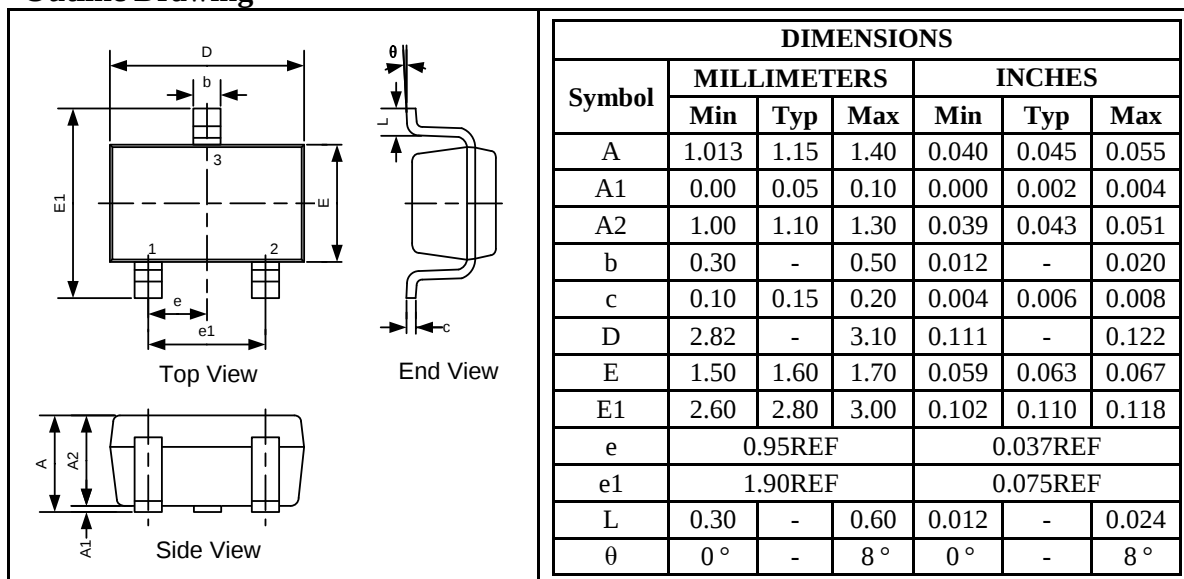

Land Pattern

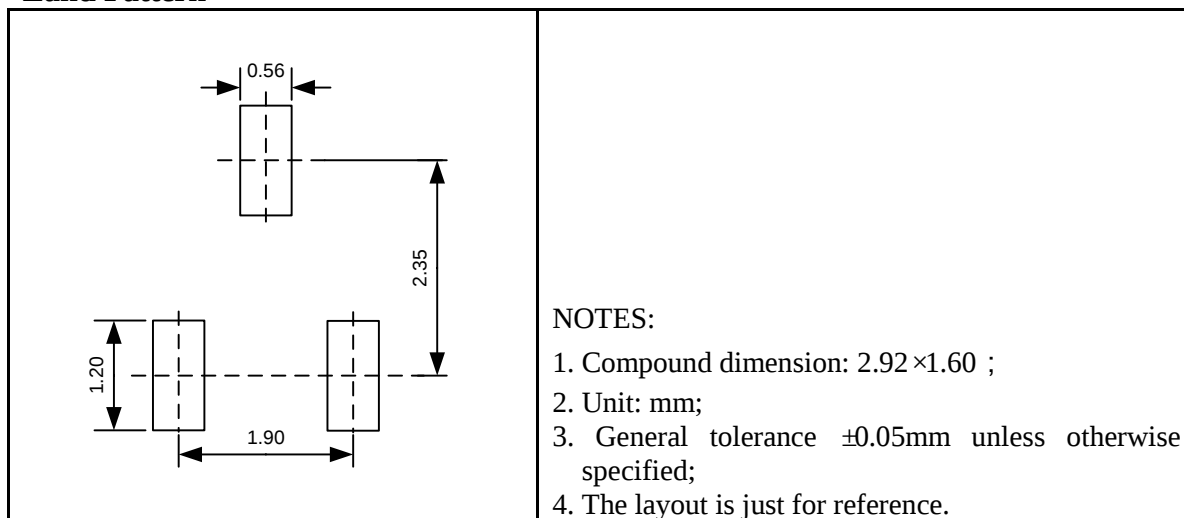


Tape and Reel Orientation

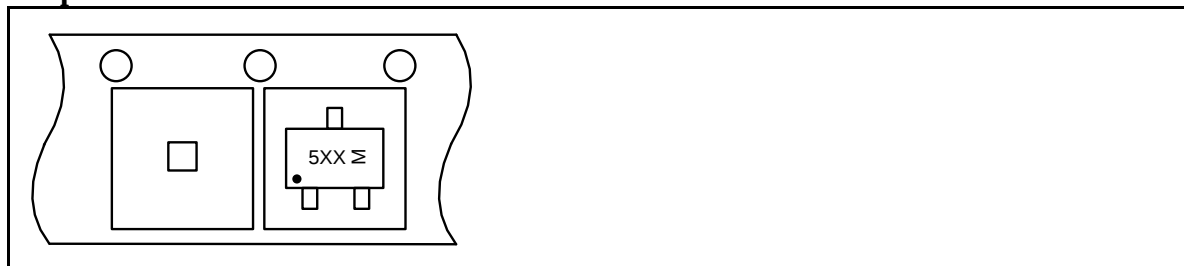


UM1451Y-xx: SOT89-3

Outline Drawing

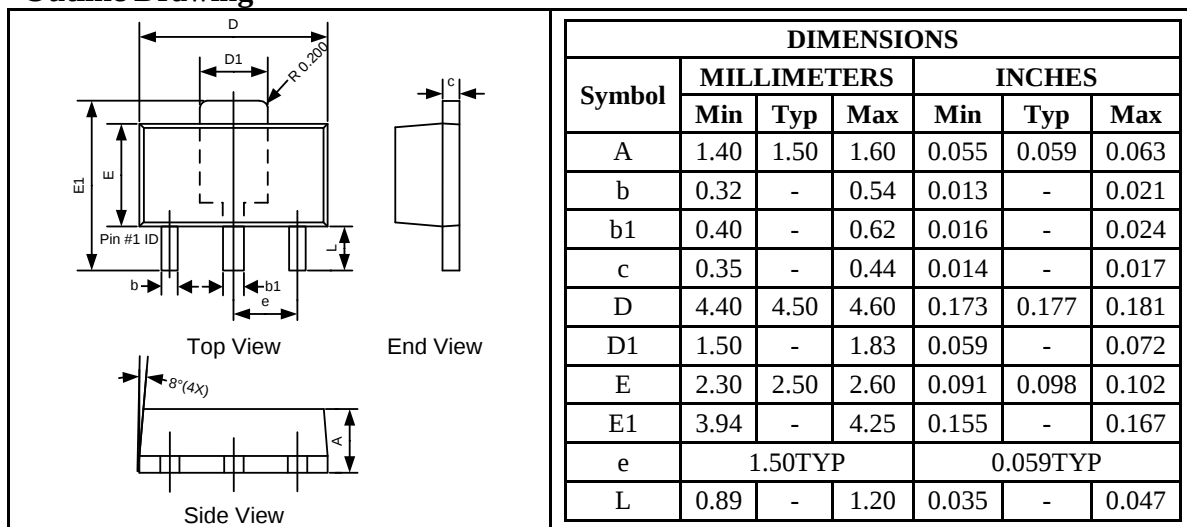

Land Pattern

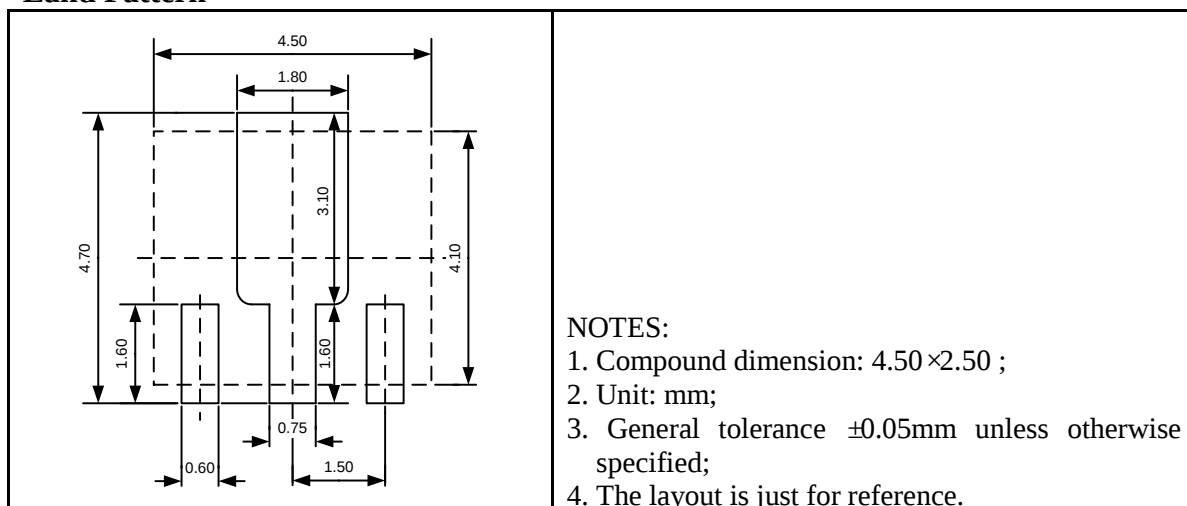


Tape and Reel Orientation




UM1451B-xx: SOT89-3

Outline Drawing

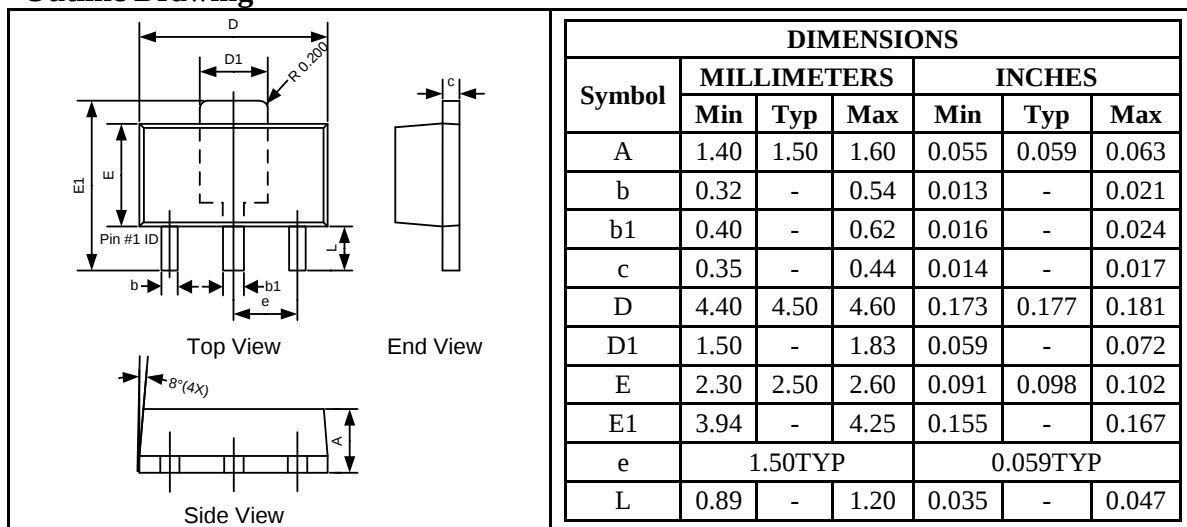

Land Pattern

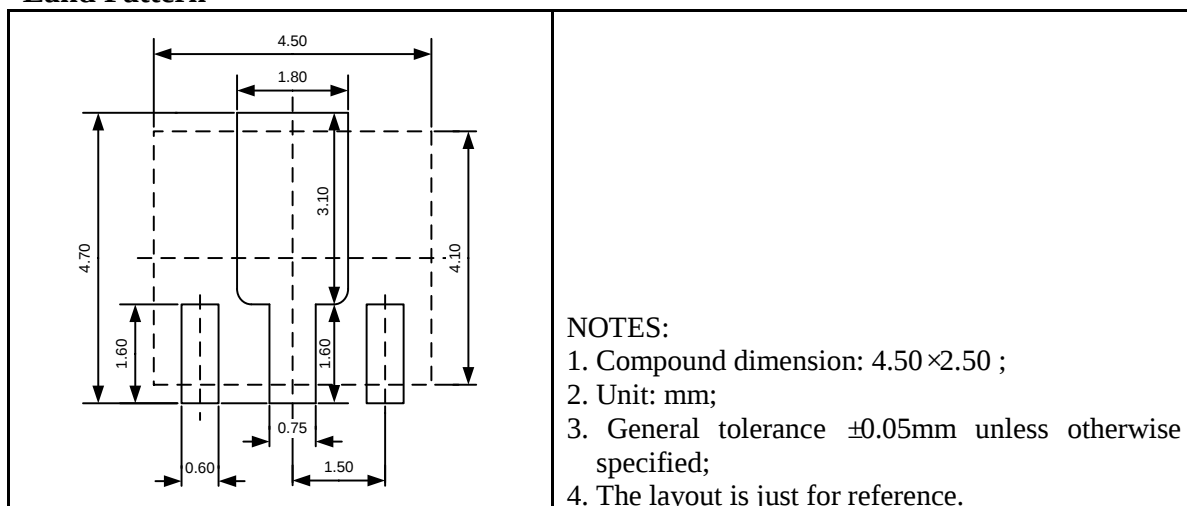


Tape and Reel Orientation




UM1461S: SOT23-5

Outline Drawing

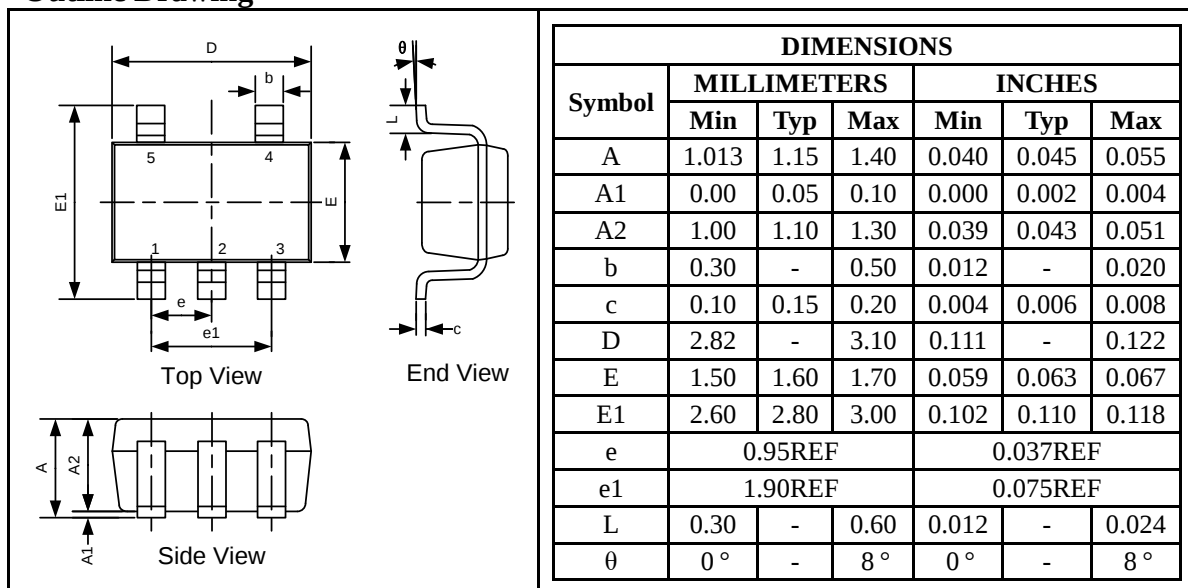

Land Pattern

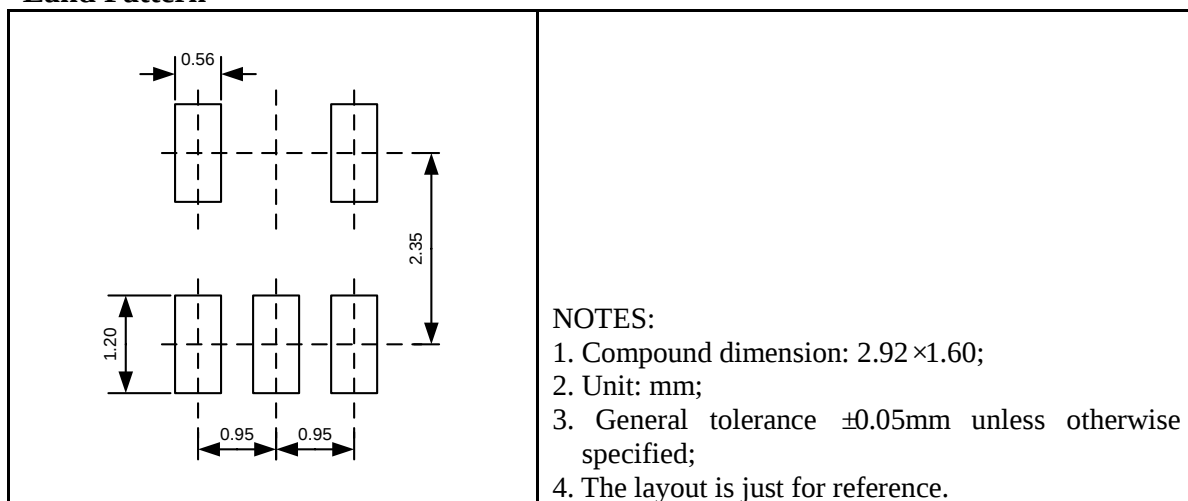


Tape and Reel Orientation




UM1461Y-xx: SOT89-5


Outline Drawing

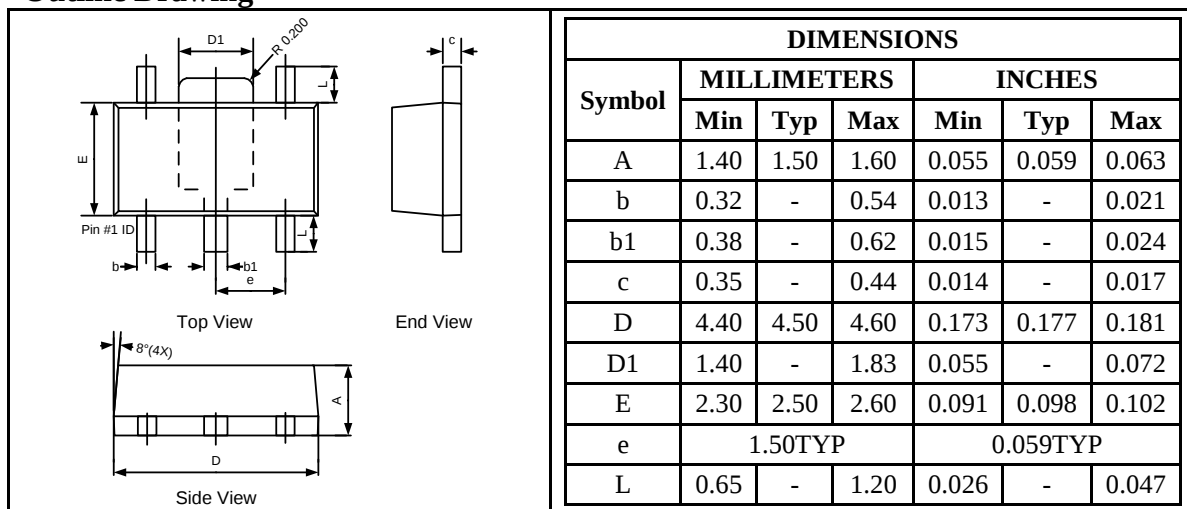

Land Pattern

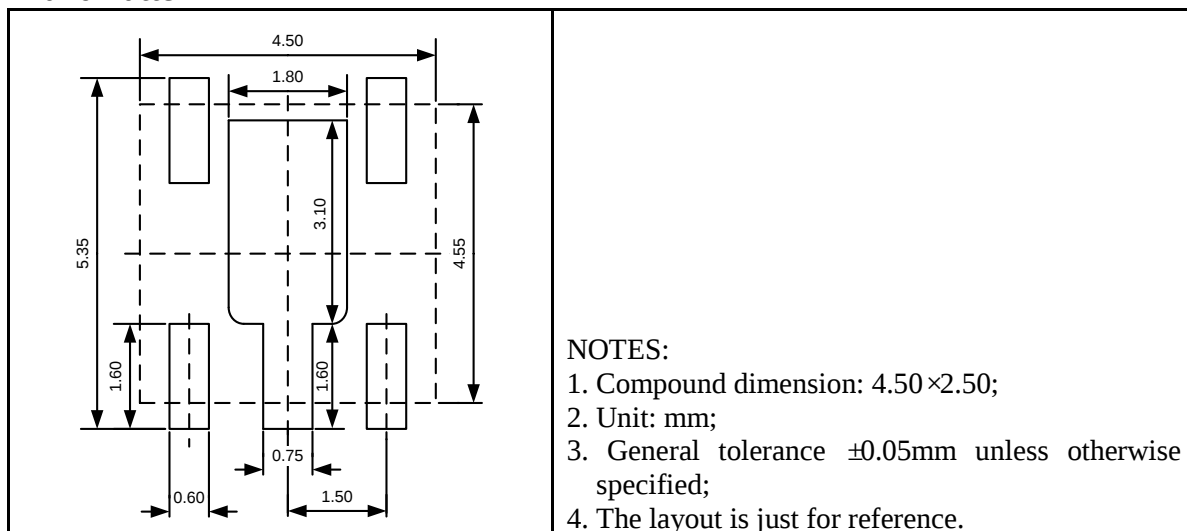

Tape and Reel Orientation

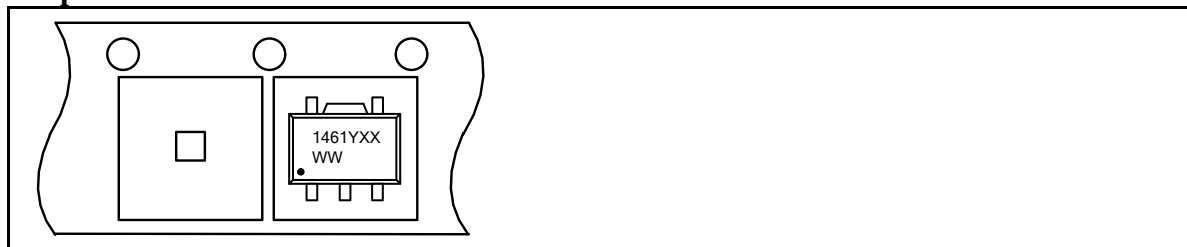

GREEN COMPLIANCE

Union Semiconductor is committed to environmental excellence in all aspects of its operations including meeting or exceeding regulatory requirements with respect to the use of hazardous substances. Numerous successful programs have been implemented to reduce the use of hazardous substances and/or emissions.

All Union components are compliant with the RoHS directive, which helps to support customers in their compliance with environmental directives. For more green compliance information, please visit:

http://www.union-ic.com/index.aspx?cat_code=RoHSDeclaration

IMPORTANT NOTICE

The information in this document has been carefully reviewed and is believed to be accurate. Nonetheless, this document is subject to change without notice. Union assumes no responsibility for any inaccuracies that may be contained in this document, and makes no commitment to update or to keep current the contained information, or to notify a person or organization of any update. Union reserves the right to make changes, at any time, in order to improve reliability, function or design and to attempt to supply the best product possible.