

低功耗、高 ESD 保护、+5V 供电 RS-232 收发器**UM207EESO/UM207EEAO/UM207EEAOR/UM207EEUO****UM208EESO/UM208EEAO/UM208EEAOR/UM208EEUO****UM211EESS/UM211EEAS/UM211EEASR/UM211EEUS****UM213EESS/UM213EEAS/UM213EEASR/UM213EEUS****描述**

UM207/208/211/213 是用于 RS-232 和 V.28 串行通信的增强型收发器，专为无法提供 $\pm 6V$ 电源的应用设计。UM207/208/211/213 功耗极低，采用 +5V 单电源供电，非常适合空间受限的情况。此外，UM207/208/211/213 集成了使用小型 $0.1\mu F$ 电容的电荷泵电路，完全满足 RS-232 电压电平要求。限摆率发送器电路提高了数据完整性。接收器具有迟滞功能，可大大提高噪声抑制能力。UM211 和 UM213 具有低功耗关断模式，可将供电电流降至 $1\mu A$ 。UM213 包括两个接收器，在关断期间保持激活状态以监控信号活动。

驱动器在符合 EIA/TIA-232E 规范的负载条件下，能够在数据速率超过 250kbps 时维持 $\pm 5V$ 的 EIA/TIA-232E 输出信号电平。驱动器输出和接收器输入引脚能够耐受 $\pm 8kV$ 的人体放电和 $\pm 15kV$ 的 IEC61000-4-2 空气放电。

UM207/208 系列采用 SOP24、SSOP24 和 TSSOP24 封装，UM211/213 采用 SOP28、SSOP28 和 TSSOP28 封装。

应用

- 便携式电脑、主机、笔记本电脑
- 手持设备
- 电池供电设备
- 仪器仪表、UPS
- 打印机和终端

特性

- 满足所有 EIA/TIA-232 标准和 ITUV2.8 规范
- 采用 +5V 的单电源供电
- 外部电荷泵电容： $4 \times 0.1\mu F$
- 250kbps（典型值）的传输速率
- 1mA（典型值）的静态电源电流
- $1\mu A$ 电流关断模式 (UM211/213)
- 2 个唤醒接收器 (UM213)
- Tri-State/Rx 使能 (UM211/213)
- RS-232 引脚提供 ESD 保护
 - $\pm 8kV$ ，人体放电模型
 - $\pm 15kV$ ，IEC61000-4-2 空气放电模型
 - $\pm 8kV$ ，IEC61000-4-2 接触放电模型
- 采用 SOP24、SSOP24、TSSOP24、SOP28、SSOP28、TSSOP28 封装

Selection Table

Part Number	Supply Voltage	Number of Drivers	Number of 232 Receivers	Low Power Shutdown	Number of Receivers Active in Shutdown
UM207EEXX	5V	5	3	NO	0
UM208EEXX	5V	4	4	NO	0
UM211EEXX	5V	4	5	YES	0
UM213EEXX	5V	4	5	YES	2

Ordering Information

Part Number	Temp. Range	Package Type	Shipping Qty
UM207EESO	-40 ℃ to +85 ℃	SOP24	30pcs/Tube
UM207EEAO	-40 ℃ to +85 ℃	SSOP24	60pcs/Tube
UM207EEAOR	-40 ℃ to +85 ℃	SSOP24	2000pcs/13Inch Tape & Reel
UM207EEUO	-40 ℃ to +85 ℃	TSSOP24	3000pcs/13Inch Tape & Reel
UM208EESO	-40 ℃ to +85 ℃	SOP24	30pcs/Tube
UM208EEAO	-40 ℃ to +85 ℃	SSOP24	60pcs/Tube
UM208EEAOR	-40 ℃ to +85 ℃	SSOP24	2000pcs/13Inch Tape & Reel
UM208EEUO	40 ℃ to +85 ℃	TSSOP24	3000pcs/13Inch Tape & Reel
UM211EESS	-40 ℃ to +85 ℃	SOP28	25pcs/Tube
UM211EEAS	-40 ℃ to +85 ℃	SSOP28	48pcs/Tube
UM211EEASR	-40 ℃ to +85 ℃	SSOP28	2000pcs/13Inch Tape & Reel
UM211EEUS	40 ℃ to +85 ℃	TSSOP28	3000pcs/13Inch Tape & Reel
UM213EESS	-40 ℃ to +85 ℃	SOP28	25pcs/Tube
UM213EEAS	-40 ℃ to +85 ℃	SSOP28	48pcs/Tube
UM213EEASR	-40 ℃ to +85 ℃	SSOP28	2000pcs/13Inch Tape & Reel
UM213EEUS	40 ℃ to +85 ℃	TSSOP28	3000pcs/13Inch Tape & Reel

Absolute Maximum Ratings (Note 1)

Symbol	Parameter		Value	Unit
V_{CC}	Supply Voltage on V_{CC}		-0.3 to +6	V
V_+	Voltage on V_+		$(V_{CC}-0.3)$ to +9	V
V_-	Voltage on V_-		-9 to +0.3	V
	Voltage on TIN		-0.3 to $(V_{CC}+0.3)$	V
	Voltage on RIN		± 30	V
	Voltage on TOUT		$(V_- - 0.3)$ to $(V_+ + 0.3)$	V
	Voltage on ROUT		-0.3 to $(V_{CC}+0.3)$	V
	Short-Circuit Duration, TOUT to GND		Continuous	
P_D	Continuous Power Dissipation at $T_A = 70^\circ\text{C}$	SOP24	941	mW
		SSOP24	640	
		SOP28	1000	
		SSOP28	762	
T_A	Operating Temperature Range		-40 to +85	$^\circ\text{C}$
T_{STG}	Storage Temperature Range		-65 to +165	$^\circ\text{C}$
T_L	Maximum Lead Temperature for Soldering 10 Seconds		+300	$^\circ\text{C}$


Note 1: Stresses beyond those listed under “Absolute Maximum Ratings” may cause permanent damage to the device. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those indicated in the operational sections of the specifications is not implied. Exposure to absolute maximum rating conditions for extended periods may affect device reliability.

Electrical Characteristics


($V_{CC}=+5.0V \pm 10\%$, $C1- C4=0.1\mu F$, $T_A=T_{MIN}$ to T_{MAX} , unless otherwise noted. Typical values are at $T_A=25^\circ C$)

Parameter	Conditions		Min	Typ	Max	Unit
Output Voltage Swing	All transmitter outputs loaded with 3kΩ to ground		±5	±6		V
V _{CC} Power Supply Current	No load			0.6	1	mA
Shutdown Supply Current	UM211			0.1	10	μA
	UM213			0.1	50	
Input Logic Threshold Low	T _{IN} , $\overline{\text{EN}}$, $\overline{\text{SHDN}}$, $\overline{\text{E N}}$, $\overline{\text{SHDN}}$				0.8	V
Input Logic Threshold High	T _{IN} , $\overline{\text{EN}}$, $\overline{\text{SHDN}}$, $\overline{\text{E N}}$, $\overline{\text{SHDN}}$		2.4			
RS-232 Input Voltage Operating Range			-30		+30	V
Receiver Input Threshold Low	V _{CC} =+5V T _A =25 °C	Active Mode	0.8	1.2		V
		Shut down Mode	0.6	1.5		
Receiver Input Threshold High	V _{CC} =+5V T _A =25 °C	Active Mode		1.7	2.4	V
		Shut down Mode		1.5	2.4	
Input Hysteresis	V _{CC} =+5V, no hysteresis in shutdown		0.2	0.5	1.0	V
Input Resistance	V _{CC} =+5V, T _A =25 °C		3	5	7	kΩ
TTL/CMOS Output Voltage Low	I _{OUT} =1.6mA				0.4	V
TTL/CMOS Output Voltage High	I _{OUT} =-1.0mA		3.5			V
TTL/CMOS Output Leakage Current	$\overline{\text{E N}}=\text{V}_{\text{CC}}, \text{EN}=0\text{V}, 0\leq \text{R}_{\text{OUT}}\leq \text{V}_{\text{CC}}$			±0.05	±10	μA
Output Enable Time	UM211/213			600		ns
Output Disable Time	UM211/213			200		ns
Receiver Propagation Delay	$\overline{\text{SHDN}}=0\text{V}$	UM213		4	40	μs
	$\overline{\text{SHDN}}=\text{V}_{\text{CC}}$			0.5	10	
	UM207/208/211			0.5	10	
Transmitter Output Resistance	V _{CC} =V ₊ =V ₋ =0V, V _{OUT} = ±2V		300			Ω
Transition Region Slew Rate	C _L =50pF to 2500pF, R _L =3kΩ to 7kΩ, V _{CC} =+5V, T _A =25 °C, measured from +3V to -3V or -3V to +3V		3	5.5	30	V/μs
RS-232 Output Short Circuit Current				±10	±30	mA
Maximum Data Rate	R _L =3kΩ to 7kΩ, C _L =50pF to 1000pF, one transmitter		120	250		kbps


Pin Configurations

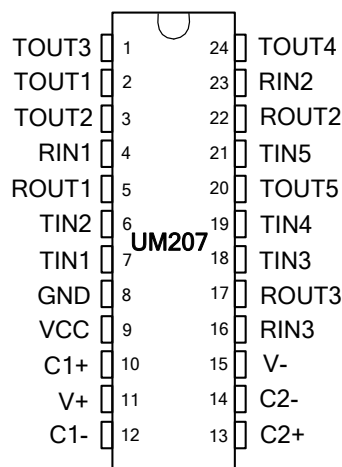


SOP24/SSOP24/TSSOP24

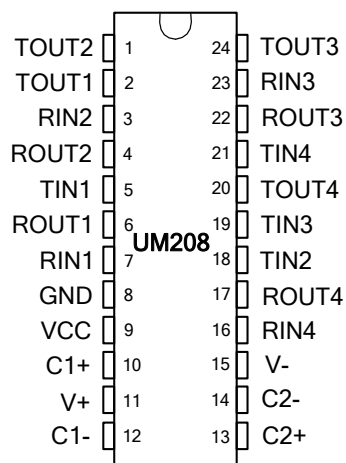

SOP24/SSOP24/TSSOP24

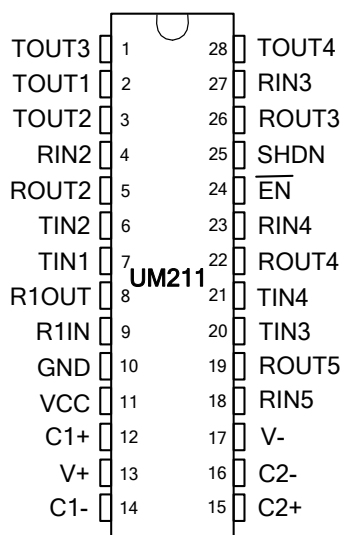

SOP28/SSOP28/TSSOP28

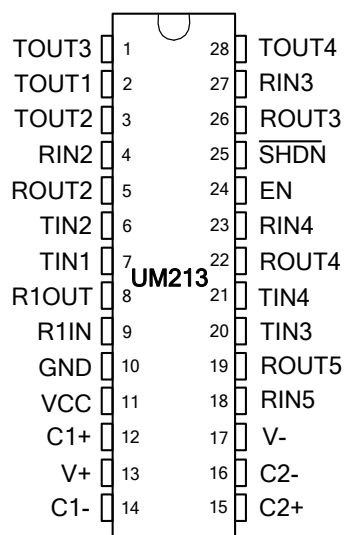

SOP28/SSOP28/TSSOP28

Pin Descriptions

Pin Name	Function
C1+, C2+	Terminals for Positive Charge Pump Capacitor
V+	Charge Pump Output Regulated to +6.5V
C1-C2-	Terminals for Negative Charge Pump Capacitor
V-	Charge Pump Output Regulated to -6.5V
TOUT_	RS-232 Driver Outputs
RIN_	RS-232 Receiver Inputs
ROUT_	RS-232 Receiver Outputs
TIN_	RS-232 Driver Inputs
GND	Ground
V _{CC}	+4.5V to +5.5V Supply Voltage Input
EN, $\overline{\text{EN}}$	Receiver Enable
SHDN, $\overline{\text{SHDN}}$	Transmitters Shutdown

UM211 Control Pin Configurations

SHDN	$\overline{\text{EN}}$	Operation Status	Transmitters T1-T5	Receivers R1-R5
0	0	Normal Operation	All Active	All Active
0	1	Normal Operation	All Active	All High-Z
1	0	Shutdown	All High-Z	All High-Z

UM213 Control Pin Configurations

SHDN	EN	Operation Status	Transmitters T1-T4	Receivers	
				R1,R2,R3	R4,R5
0	0	Shutdown	All High-Z	High-Z	High-Z
0	1	Shutdown	All High-Z	High-Z	Active
1	0	Normal Operation	All Active	High-Z	High-Z
1	1	Normal Operation	All Active	Active	Active

Active=active with reduced performance

Detailed Description

The UM207/208/211/213 consists of three sections: charge-pump voltage converters, drivers, and receivers. These E versions provide extra protection against ESD. They survive $\pm 8\text{kV}$ discharges to the RS-232 inputs and outputs, tested using the Human Body Model. When tested according to IEC61000-4-2, they survive $\pm 8\text{kV}$ contact-discharges and $\pm 15\text{kV}$ air-gap discharges. The rugged E versions are intended for use in harsh environments or applications where the RS-232 connection is frequently changed.

RS-232 Drivers

The drivers are inverting transmitters, which accept TTL or CMOS inputs and output RS-232 signals with an inverted sense relative to the input logic levels. Typically the RS-232 output voltage swing is $\pm 9\text{V}$. Even under worst case loading conditions of $3\text{k}\Omega$ and 2500pF , the output is guaranteed to be $\pm 5\text{V}$, which is consistent with the RS-232 standard specifications. The transmitter outputs are protected against infinite short-circuits to ground without degradation in reliability. The instantaneous slew rate of the transmitter output is internally limited to a maximum of $30\text{V}/\mu\text{s}$ in order to meet the RS-232 standard. The smooth transition of the loaded output from V_{OL} to V_{OH} clearly meets the monotonicity requirements of the RS-232 standard.

RS-232 Receivers

The receivers convert RS-232 input signals to inverted TTL signals. The input thresholds are 0.8V minimum and 2.4V maximum, again well within the 3V RS-232 requirements. The receiver inputs are also protected against voltage up to 30V . A $5\text{k}\Omega$ pull down resistor to ground will commit the output of the receiver to a high state when the pin is float. In actual system applications, it is quite possible for signals to be applied to the receiver inputs before power is applied the receiver circuitry. This occurs, for example, when a PC user attempts to print, only to realize the printer wasn't turned on. In this case an RS-232 signal from the PC will appear on the receiver input at the printer. When the printer power is turned on, the receiver will operate normally. All of these enhanced devices are fully protected.

Shutdown and Enable Control

In shutdown mode, the UM211/213 charge pumps are turned off, V_+ is pulled down to V_{CC} , V_- is pulled to ground, and the transmitter outputs are disabled. This reduces supply current typically to $1\mu\text{A}$. The time required to exit shutdown is 1ms .

All receivers except R4 and R5 on the UM213 are put into a high-impedance state in shutdown mode. The UM213's R4 and R5 receivers still function in shutdown mode. These two receivers are useful for monitoring external activity while maintaining minimal power consumption.

The enable control is used to put the receiver outputs into a high-impedance state, so that the receivers can be connected directly to a three-state bus. It has no effect on the RS-232 drivers or on the charge pumps.





UM213 Receiver Operation in Shutdown

During normal operation, the UM213's receiver propagation delay is typically $1\mu\text{s}$. When entering shutdown with receivers active, R4 and R5 are not valid until $80\mu\text{s}$ after SHDN is driven low. In shutdown mode, propagation delays increase to $4\mu\text{s}$ for a high-to-low or a low-to-high transition. When exiting shutdown, all receiver outputs are invalid until the charge pumps reach nominal values ($< 2\text{ms}$ when using $0.1\mu\text{F}$ capacitors).

ESD Protection

UM207/208/211/213 devices have standard ESD protection structures incorporated on the pins to protect against electrostatic discharges encountered during assembly and handling. In addition, the RS-232 bus pins (driver outputs and receiver input) of these devices have an extra level of ESD protection. Advanced ESD structures were designed to successfully protect these pins against ESD discharge of $\pm 8\text{kV}$ Human Body Model when powered down or up.

Typical Operating Circuits

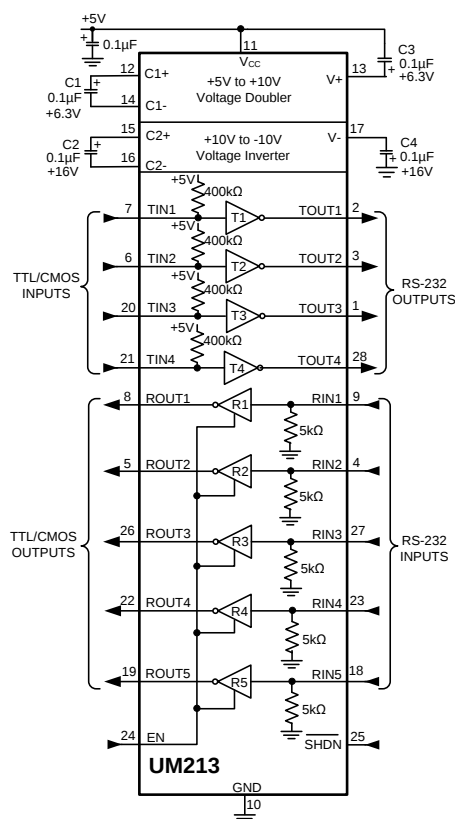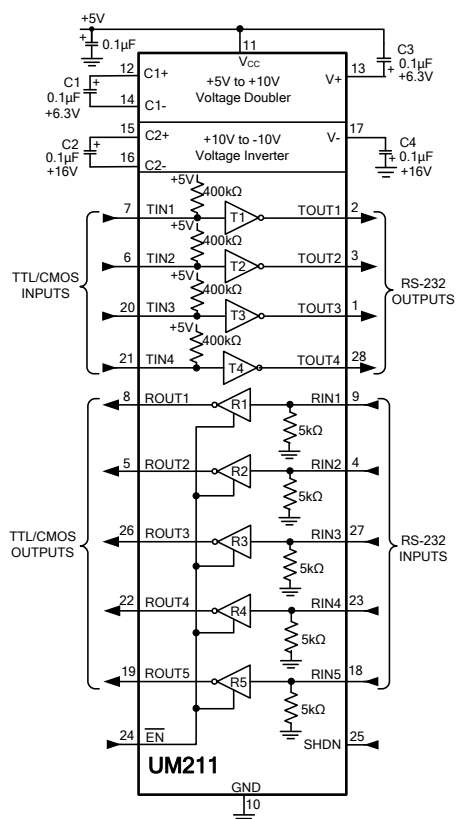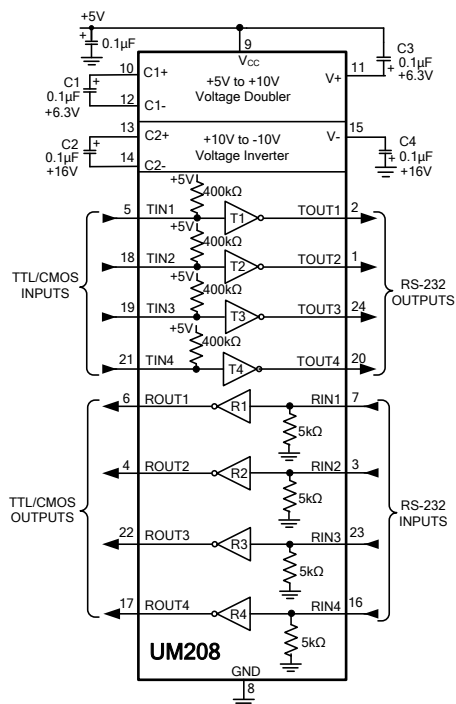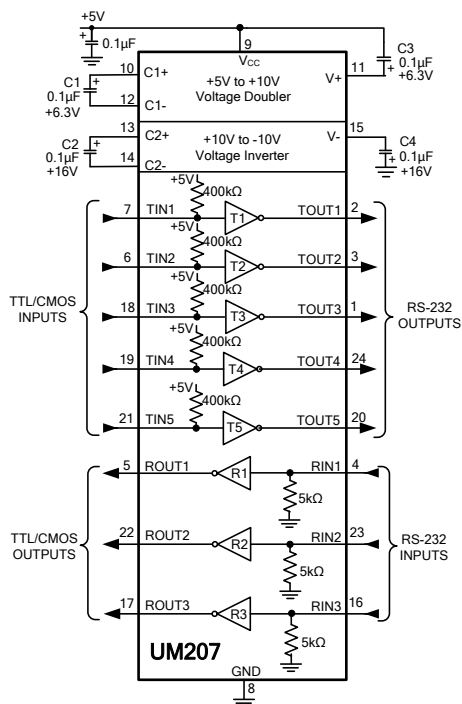

Application Information

Capacitor Selection

The capacitor type used for C1–C4 is not critical for proper operation. The UM207/208/211/213 series require 0.1 μ F capacitors, although in all cases capacitors up to 10 μ F can be used without harm. Ceramic dielectrics are suggested for the 0.1 μ F capacitors. When using the minimum recommended capacitor values, make sure the capacitance value does not degrade excessively as the operating temperature varies. If in doubt, use capacitors with a larger (e.g., 2x) nominal value. The capacitors' effective series resistance (ESR), which usually rises at low temperatures, influences the amount of ripple on V₊ and V₋. Use larger capacitors (up to 10 μ F) to reduce the output impedance at V₊ and V₋. Bypass V_{CC} to ground with at least 0.1 μ F capacitor. In applications sensitive to power-supply noise generated by the charge pumps, decouple V_{CC} to ground with a capacitor the same size as (or larger than) the charge pump capacitors (C1–C4).

V₊ and V₋ as Power Supplies

A small amount of power can be drawn from V₊ and V₋, although this will reduce both driver output swing and noise margins. Increasing the value of the charge-pump capacitors (up to 10 μ F) helps maintain performance when power is drawn from V₊ or V₋.

Driving Multiple Receivers

Each transmitter is designed to drive a single receiver. Transmitters can be paralleled to drive multiple receivers.


Package Information

UM207EESO SOP24

Outline Drawing


DIMENSIONS						
Symbol	MILLIMETERS			INCHES		
	Min	Typ	Max	Min	Typ	Max
A	2.35	2.55	2.80	0.093	0.100	0.110
A1	0.05	0.20	0.30	0.002	0.008	0.012
A2	2.10	-	2.65	0.083	-	0.104
b	0.33	-	0.54	0.013	-	0.021
c	0.15	-	0.34	0.006	-	0.013
D	15.20	15.40	15.60	0.598	0.606	0.614
E	7.40	7.50	7.60	0.291	0.295	0.299
E1	9.80	-	10.61	0.386	-	0.418
e	1.27BSC			0.050BSC		
L	0.40	-	1.27	0.016	-	0.050
θ	0°	-	8°	0°	-	8°

Land Pattern

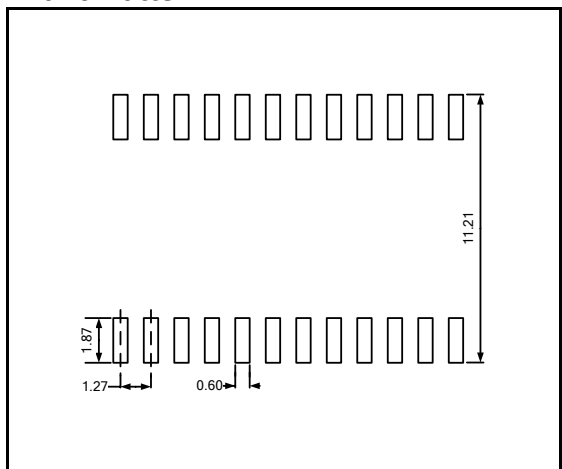
	NOTES: - Compound dimension: 15.40×7.50; - Unit: mm; - General tolerance $\pm 0.05\text{mm}$ unless otherwise specified; - The layout is just for reference.
---	---

UM207EEAO SSOP24

Outline Drawing

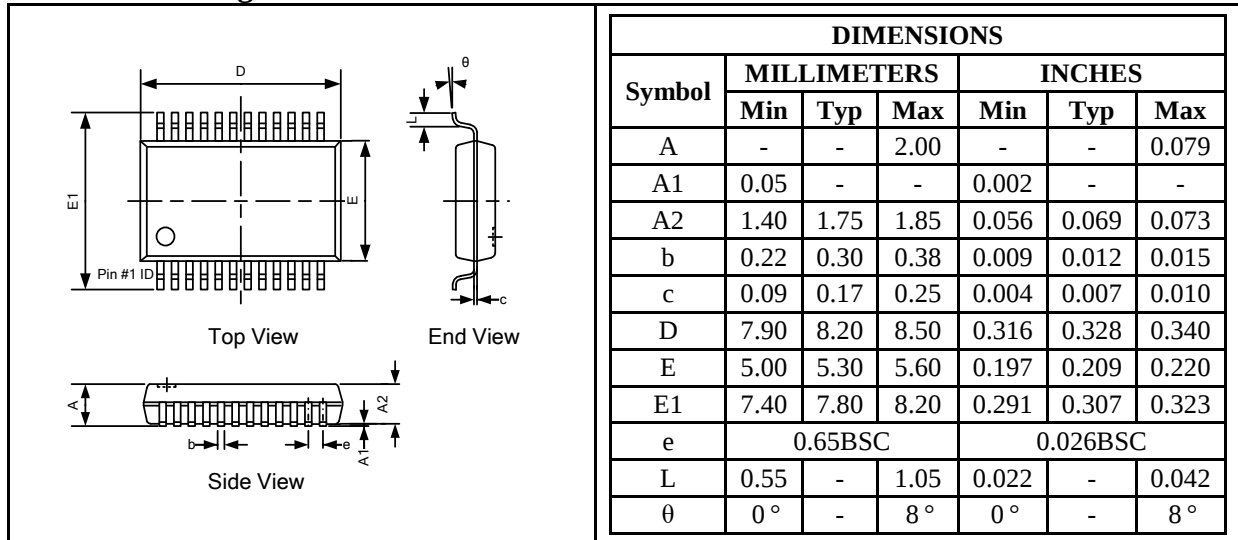


Land Pattern

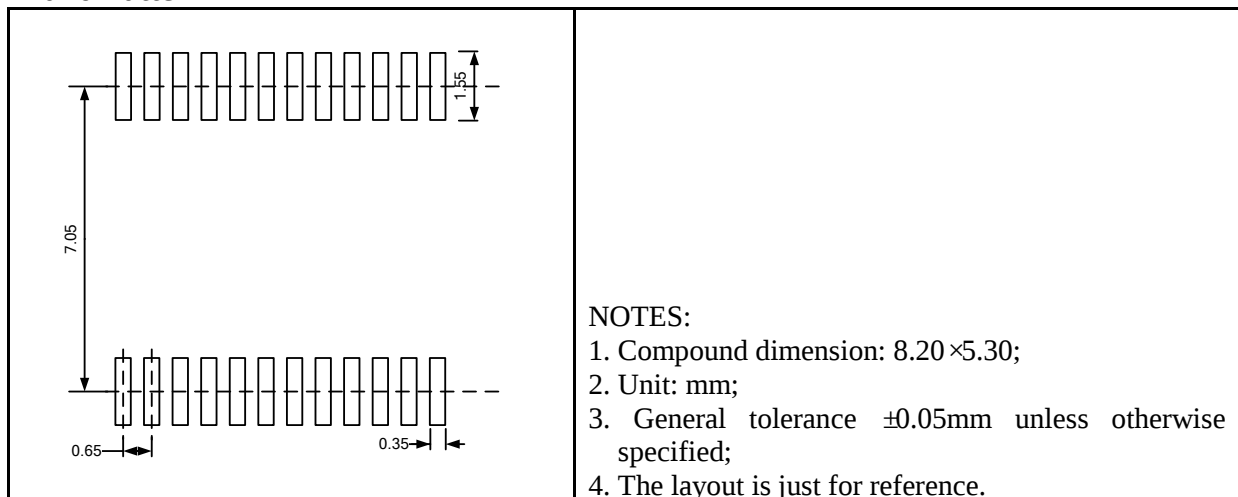


UM207EEAOR SSOP24

Outline Drawing

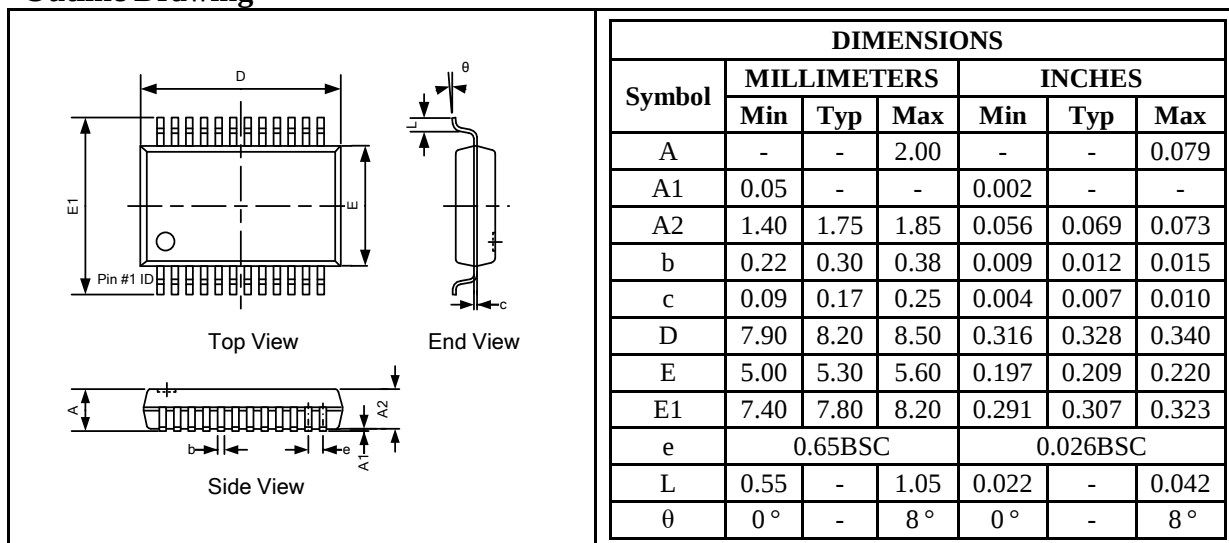

Land Pattern

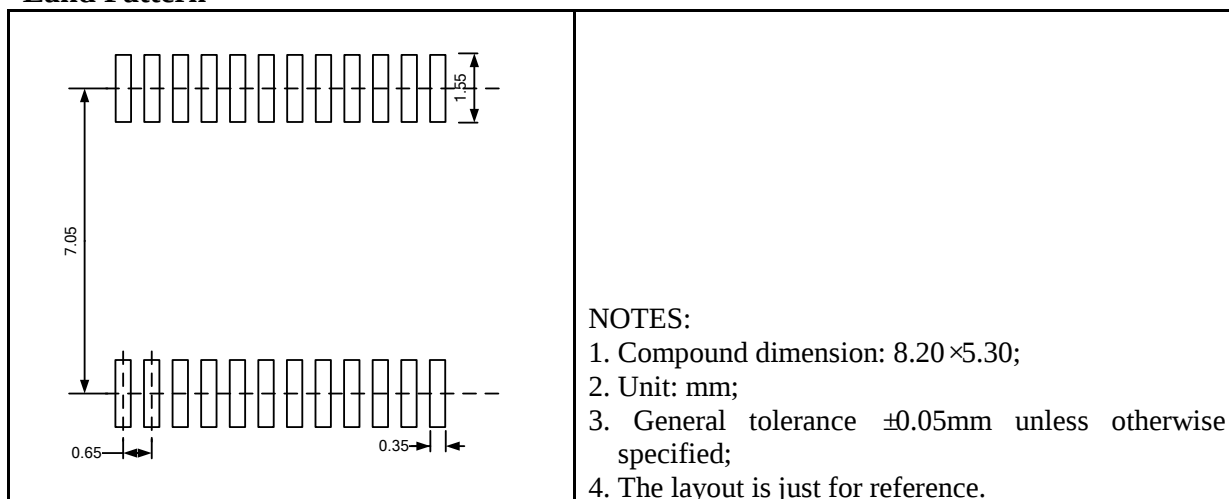


Tape and Reel Orientation




UM207EEUO TSSOP24

Outline Drawing

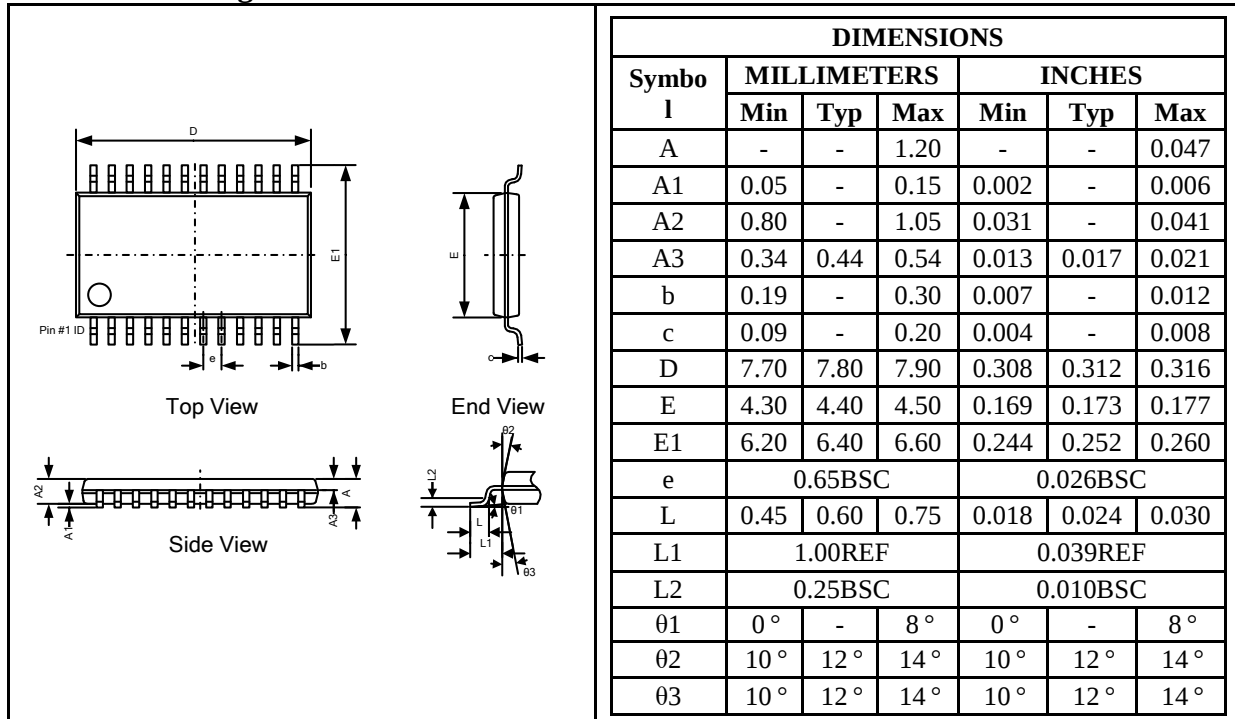

Land Pattern

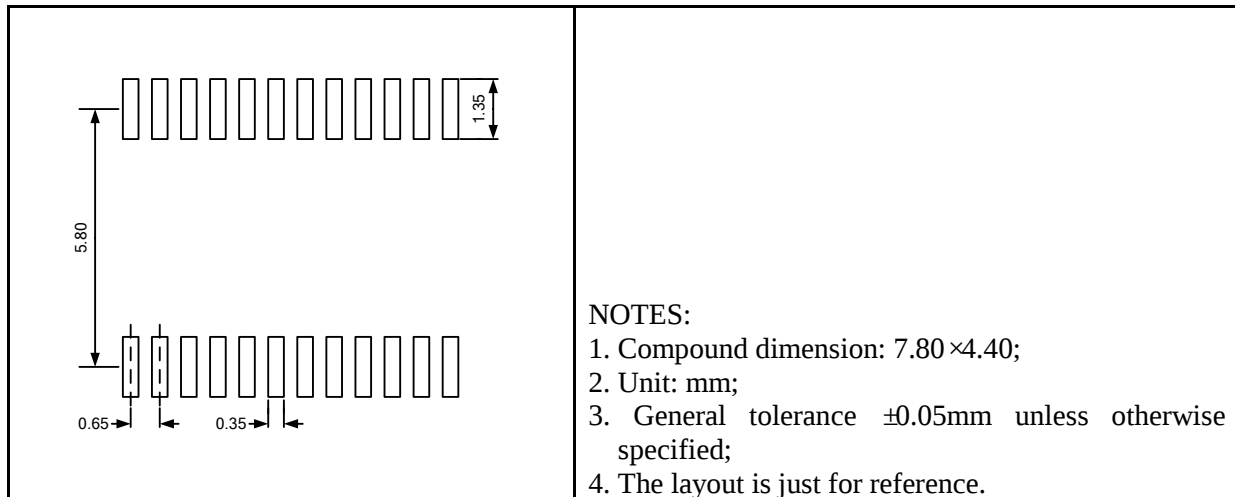

Tape and Reel Orientation




UM208EESO SOP24

Outline Drawing


DIMENSIONS						
Symbol	MILLIMETERS			INCHES		
	Min	Typ	Max	Min	Typ	Max
A	2.35	2.55	2.80	0.093	0.100	0.110
A1	0.05	0.20	0.30	0.002	0.008	0.012
A2	2.10	-	2.65	0.083	-	0.104
b	0.33	-	0.54	0.013	-	0.021
c	0.15	-	0.34	0.006	-	0.013
D	15.20	15.40	15.60	0.598	0.606	0.614
E	7.40	7.50	7.60	0.291	0.295	0.299
E1	9.80	-	10.61	0.386	-	0.418
e	1.27BSC			0.050BSC		
L	0.40	-	1.27	0.016	-	0.050
θ	0°	-	8°	0°	-	8°

Land Pattern

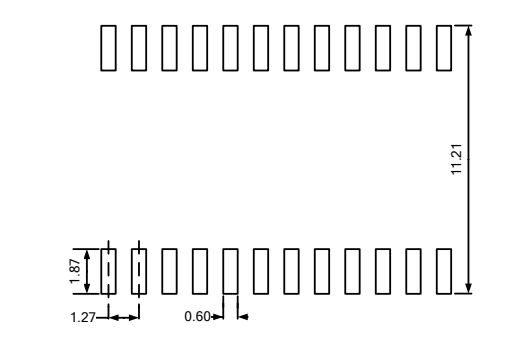
	NOTES: 1. Compound dimension: 15.40×7.50; 2. Unit: mm; 3. General tolerance $\pm 0.05\text{mm}$ unless otherwise specified; 4. The layout is just for reference.
---	---

UM208EEAO SSOP24

Outline Drawing

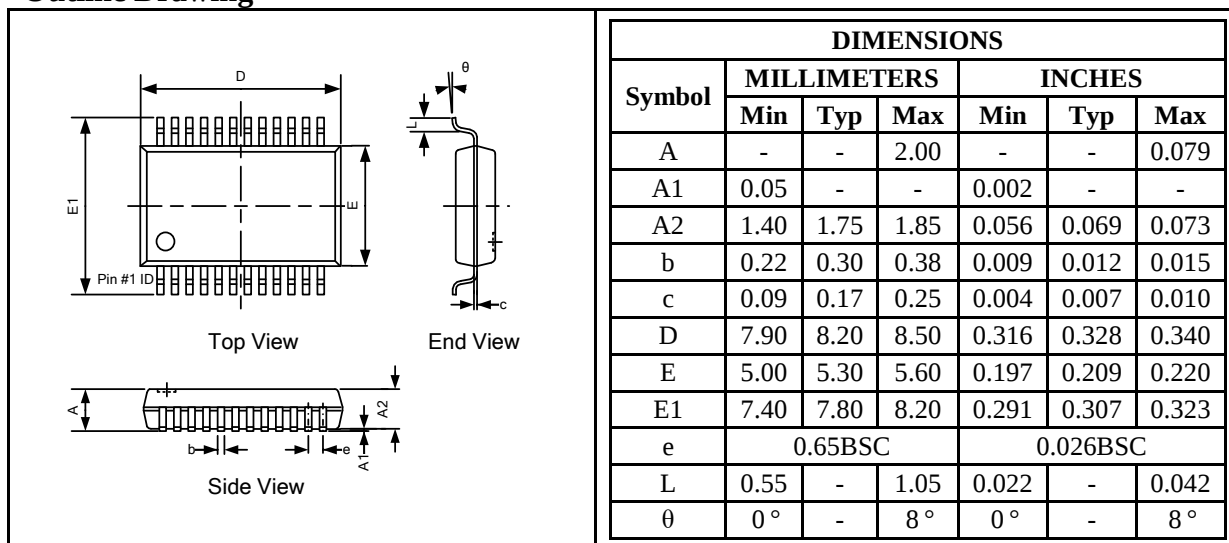


Land Pattern

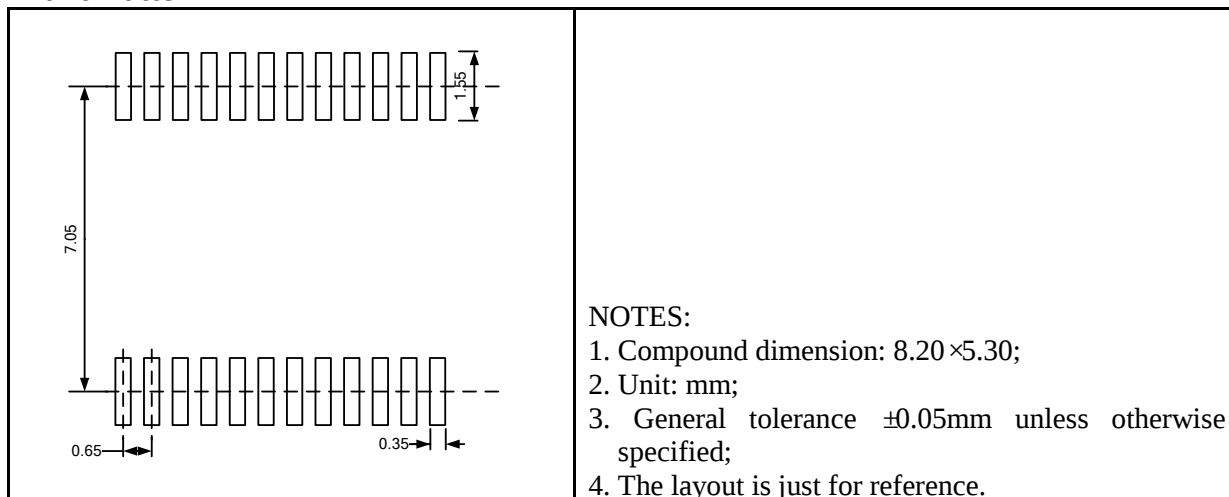


UM208EEAOR SSOP24

Outline Drawing

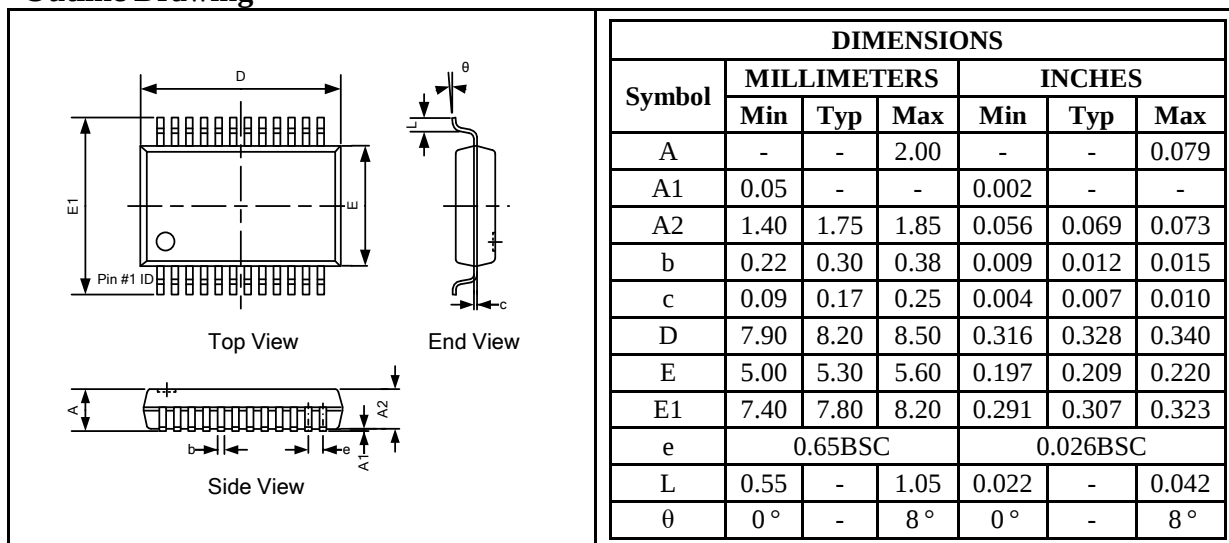

Land Pattern

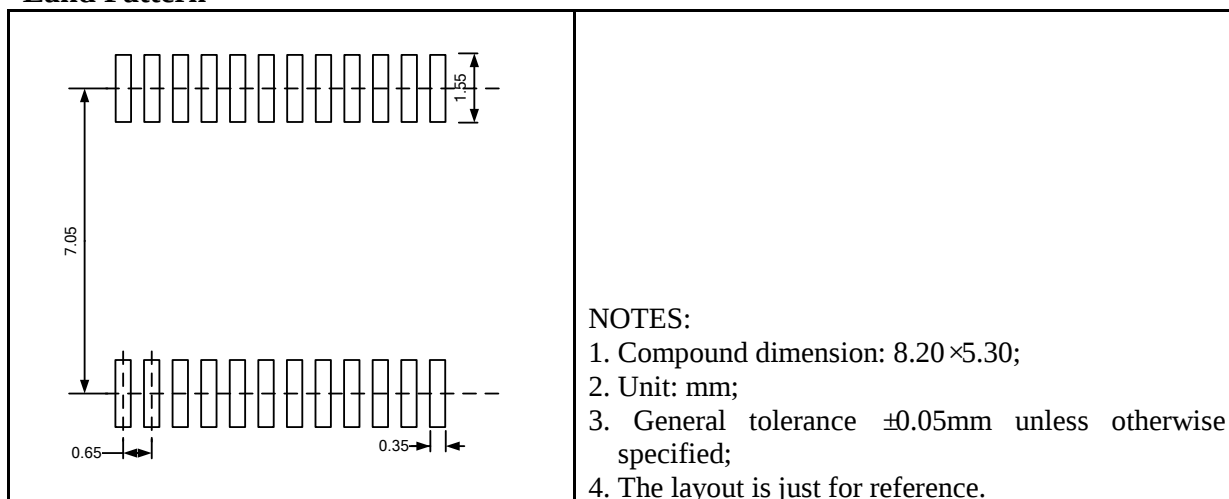


Tape and Reel Orientation




UM208EEUO TSSOP24

Outline Drawing

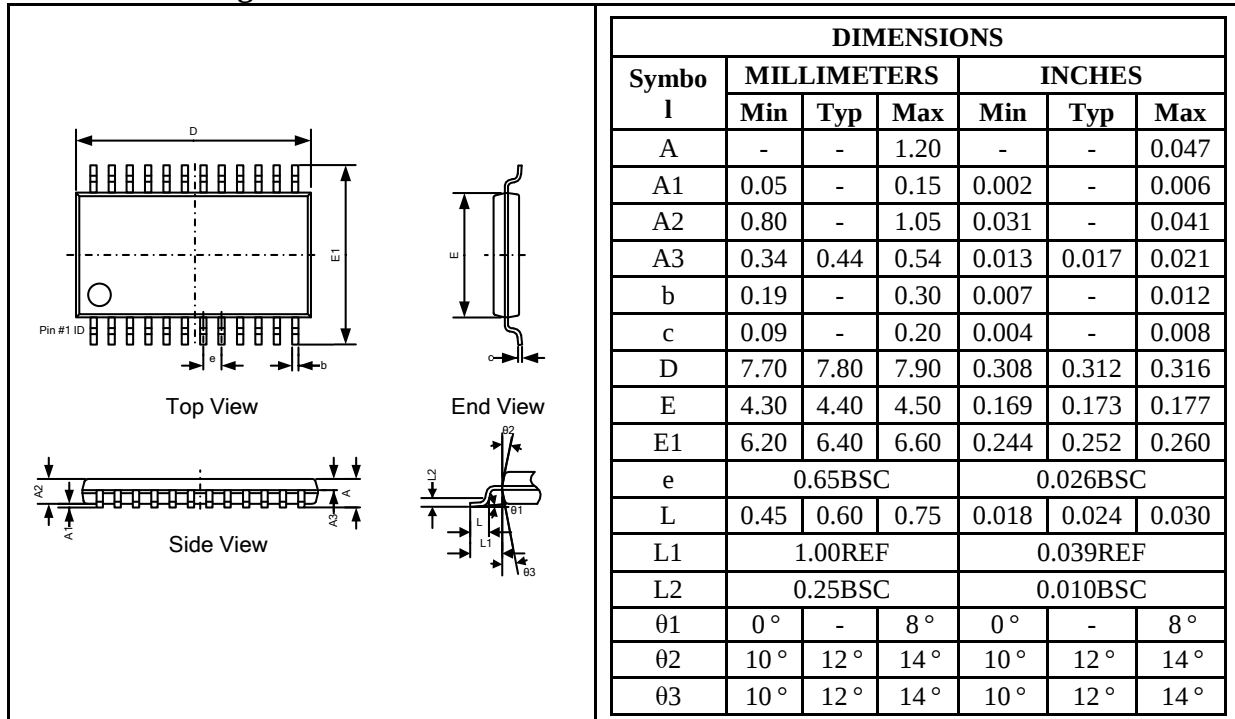

Land Pattern

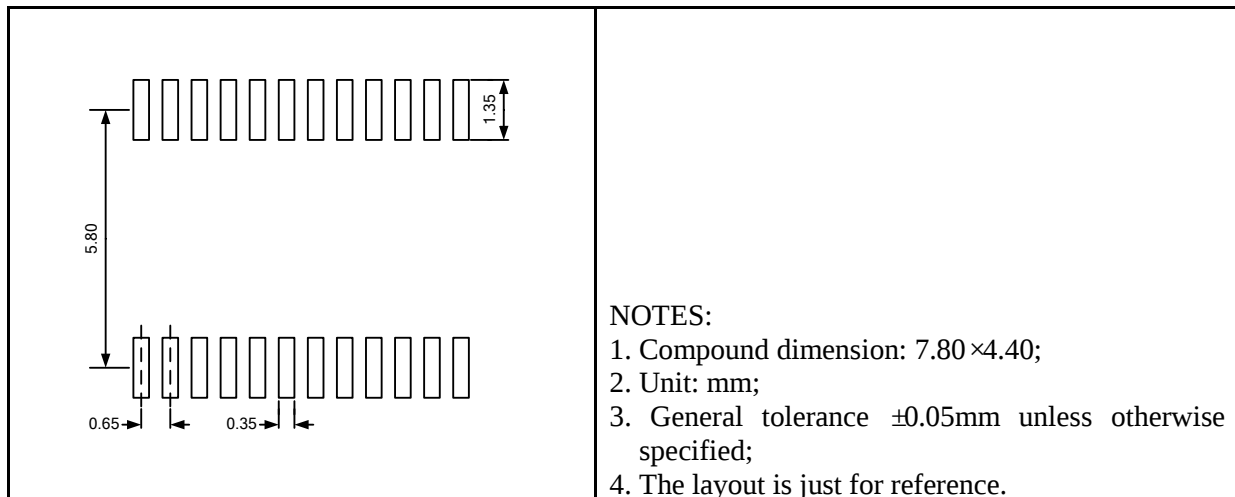

Tape and Reel Orientation




UM211EES SOP28

Outline Drawing


DIMENSIONS						
Symbol	MILLIMETERS			INCHES		
	Min	Typ	Max	Min	Typ	Max
A	2.35	2.55	2.80	0.093	0.100	0.110
A1	0.10	0.20	0.30	0.004	0.008	0.012
A2	2.25	-	2.65	0.089	-	0.104
b	0.33	-	0.54	0.013	-	0.021
c	0.15	-	0.33	0.006	-	0.013
D	17.40	-	18.10	0.685	-	0.713
E	7.40	7.55	7.70	0.291	0.297	0.303
E1	10.20	10.40	10.61	0.402	0.409	0.418
e	1.27BSC			0.050BSC		
L	0.40	-	1.27	0.016	-	0.050
θ	0°	-	8°	0°	-	8°

Land Pattern

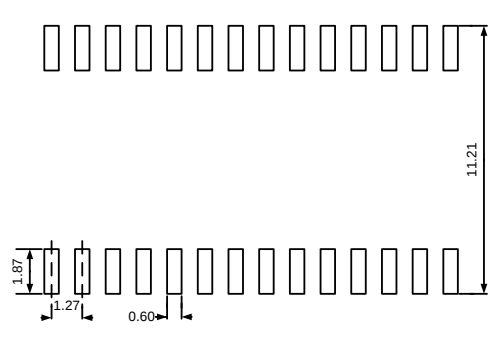
	NOTES: 1. Compound dimension: 17.75×7.55; 2. Unit: mm; 3. General tolerance $\pm 0.05\text{mm}$ unless otherwise specified; 4. The layout is just for reference.
---	---

UM211EEAS SSOP28

Outline Drawing

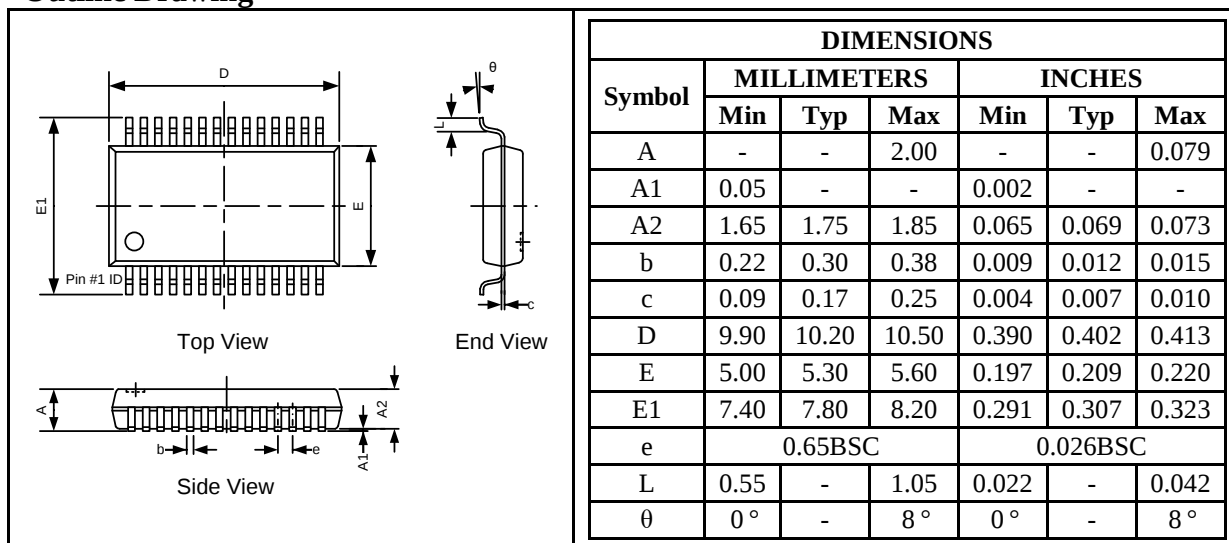


Land Pattern

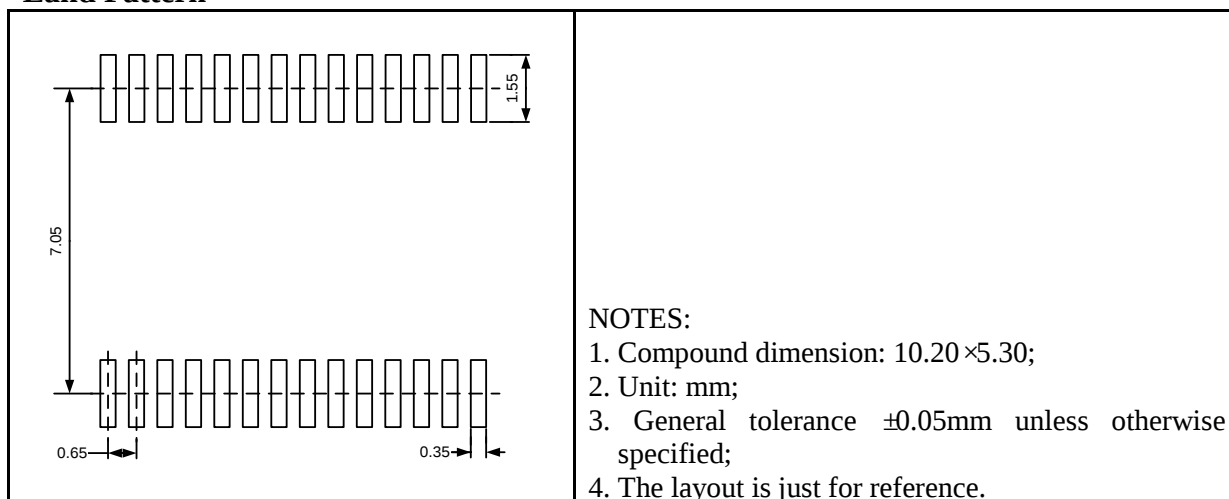


UM211EEASR SSOP28

Outline Drawing

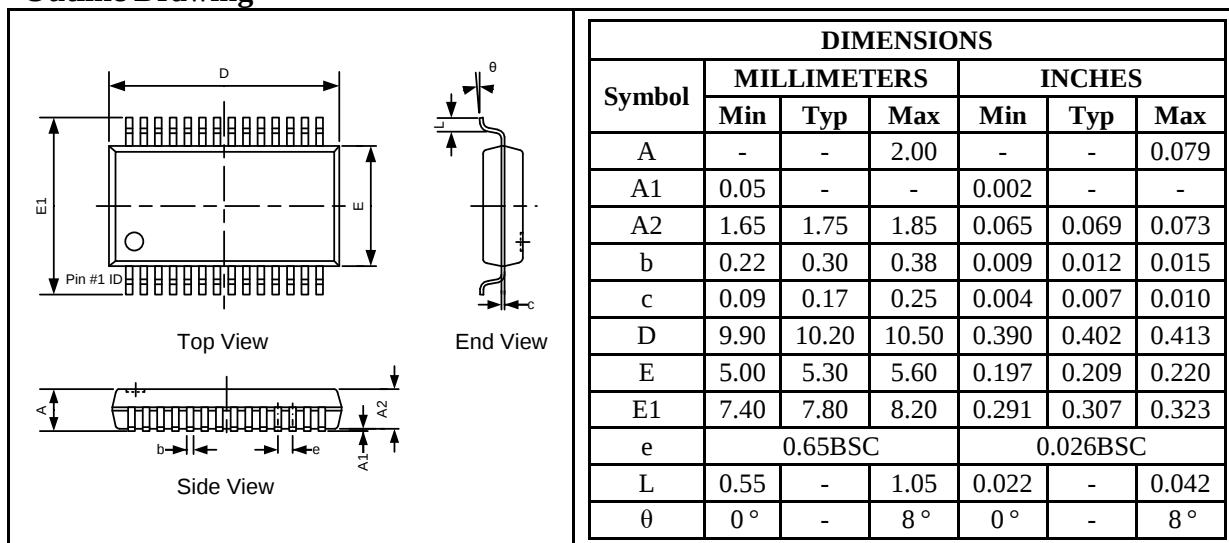

Land Pattern

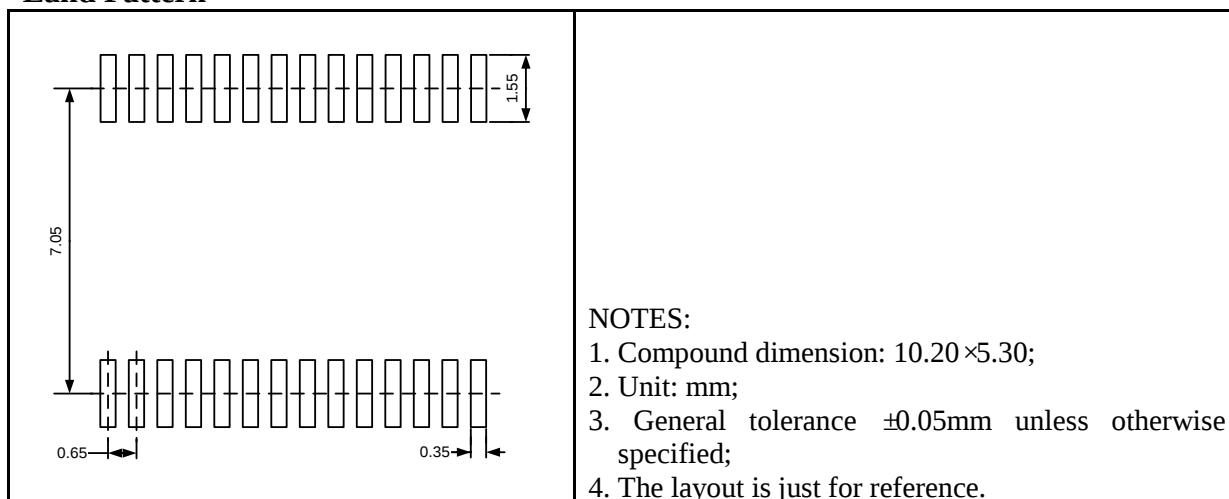


Tape and Reel Orientation




UM211EEUS TSSOP28

Outline Drawing

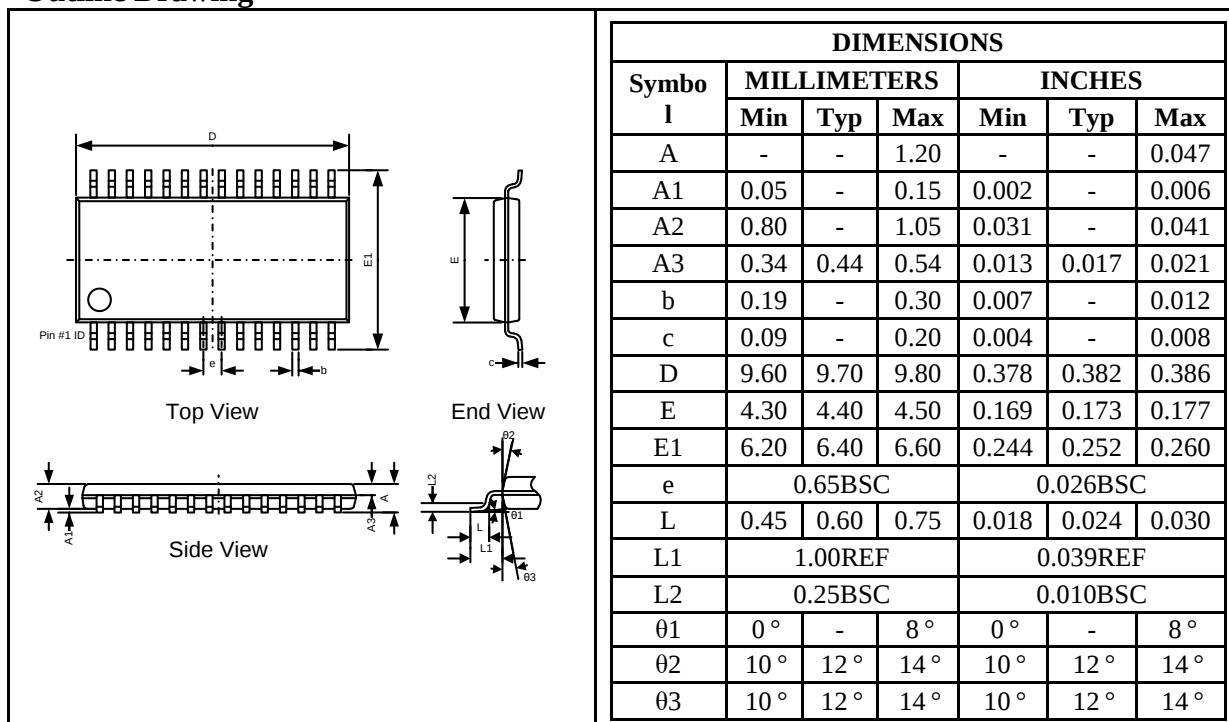

Land Pattern

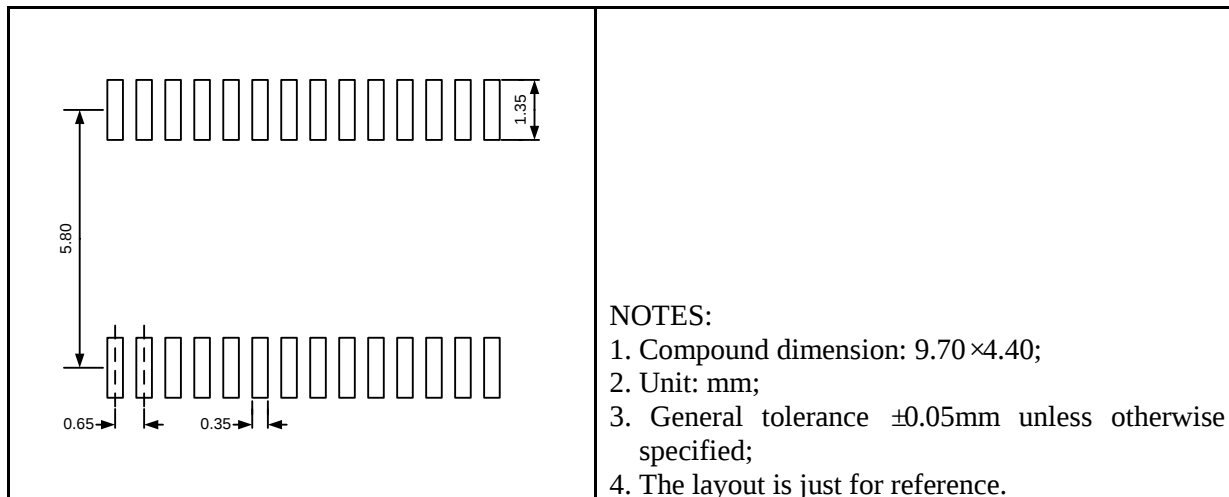

Tape and Reel Orientation




UM213EESS SOP28

Outline Drawing


DIMENSIONS						
Symbol	MILLIMETERS			INCHES		
	Min	Typ	Max	Min	Typ	Max
A	2.35	2.55	2.80	0.093	0.100	0.110
A1	0.10	0.20	0.30	0.004	0.008	0.012
A2	2.25	-	2.65	0.089	-	0.104
b	0.33	-	0.54	0.013	-	0.021
c	0.15	-	0.33	0.006	-	0.013
D	17.40	-	18.10	0.685	-	0.713
E	7.40	7.55	7.70	0.291	0.297	0.303
E1	10.20	10.40	10.61	0.402	0.409	0.418
e	1.27BSC			0.050BSC		
L	0.40	-	1.27	0.016	-	0.050
θ	0°	-	8°	0°	-	8°

Land Pattern

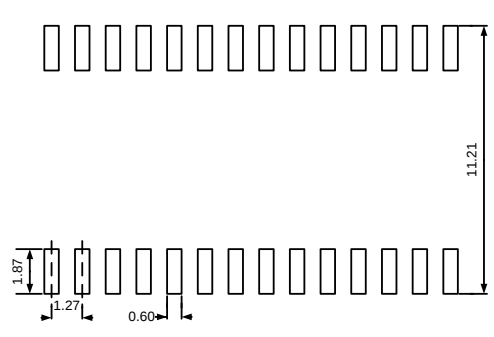
	NOTES: 1. Compound dimension: 17.75×7.55; 2. Unit: mm; 3. General tolerance $\pm 0.05\text{mm}$ unless otherwise specified; 4. The layout is just for reference.
---	---

UM213EEAS SSOP28

Outline Drawing

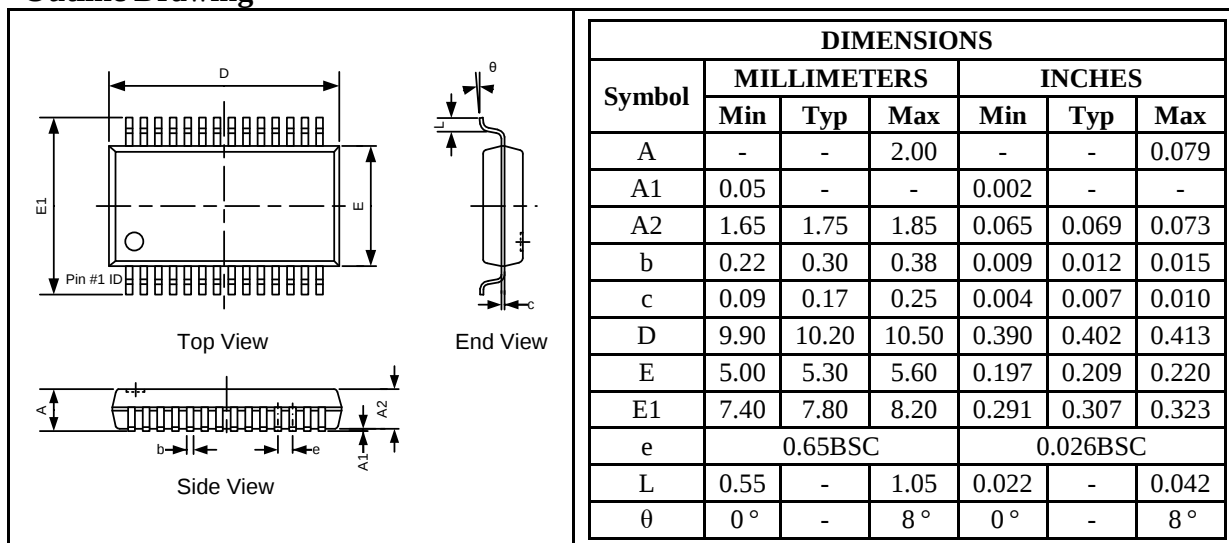


Land Pattern

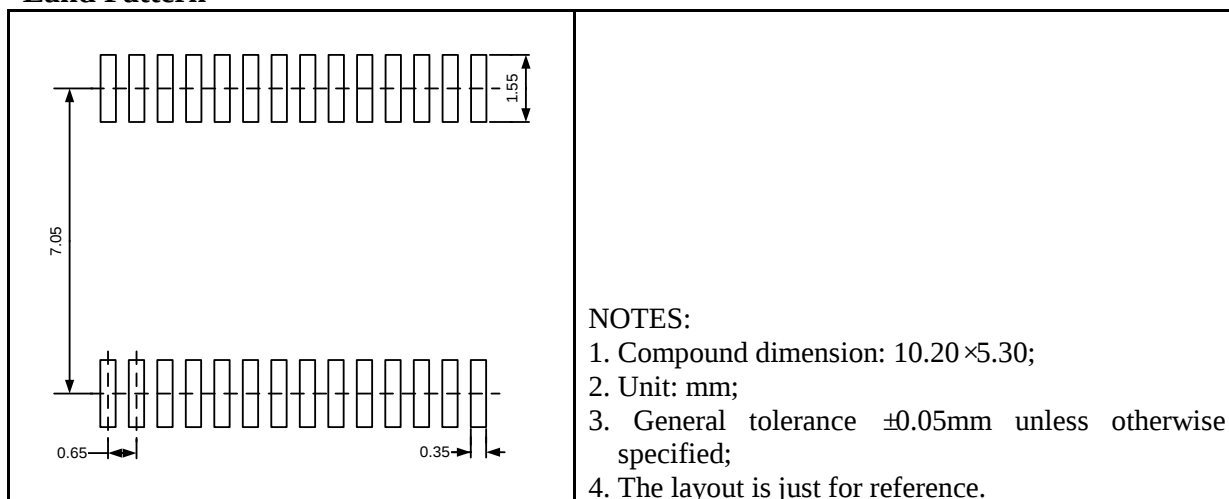


UM213EEASR SSOP28


Outline Drawing

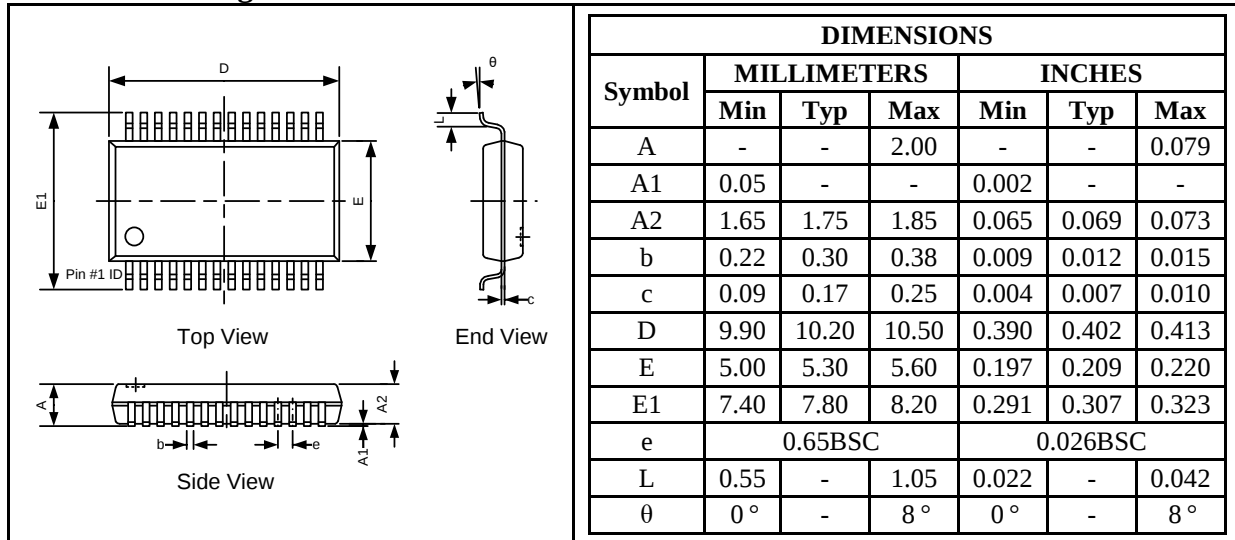

Land Pattern

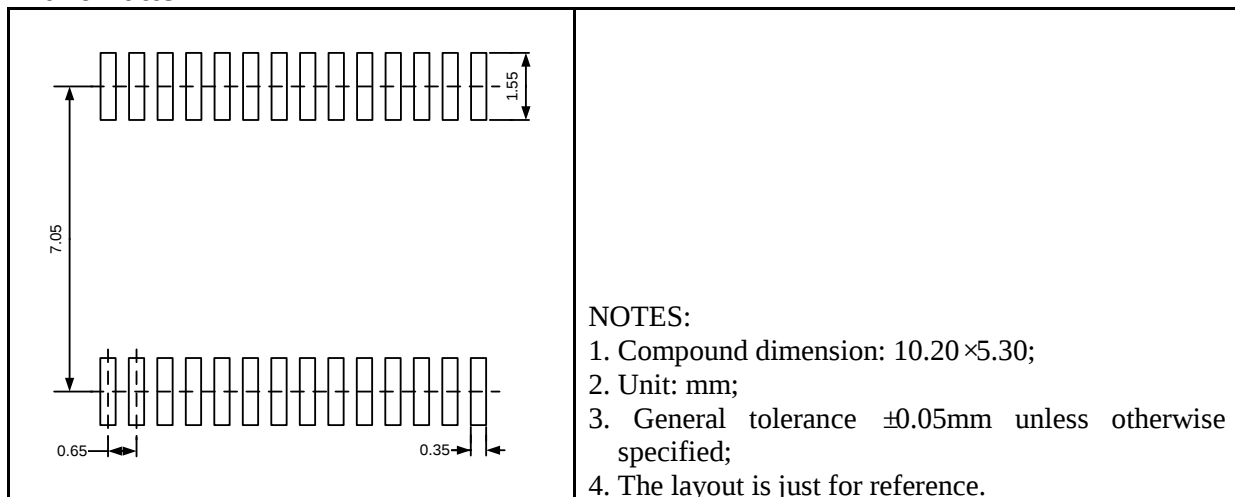


Tape and Reel Orientation

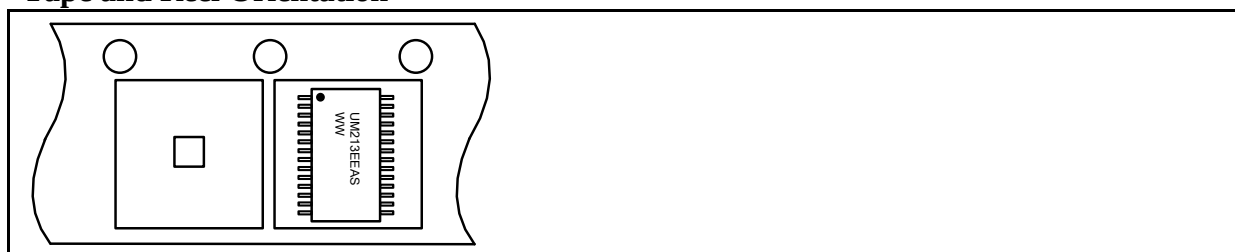


UM213EEUS TSSOP28

Outline Drawing

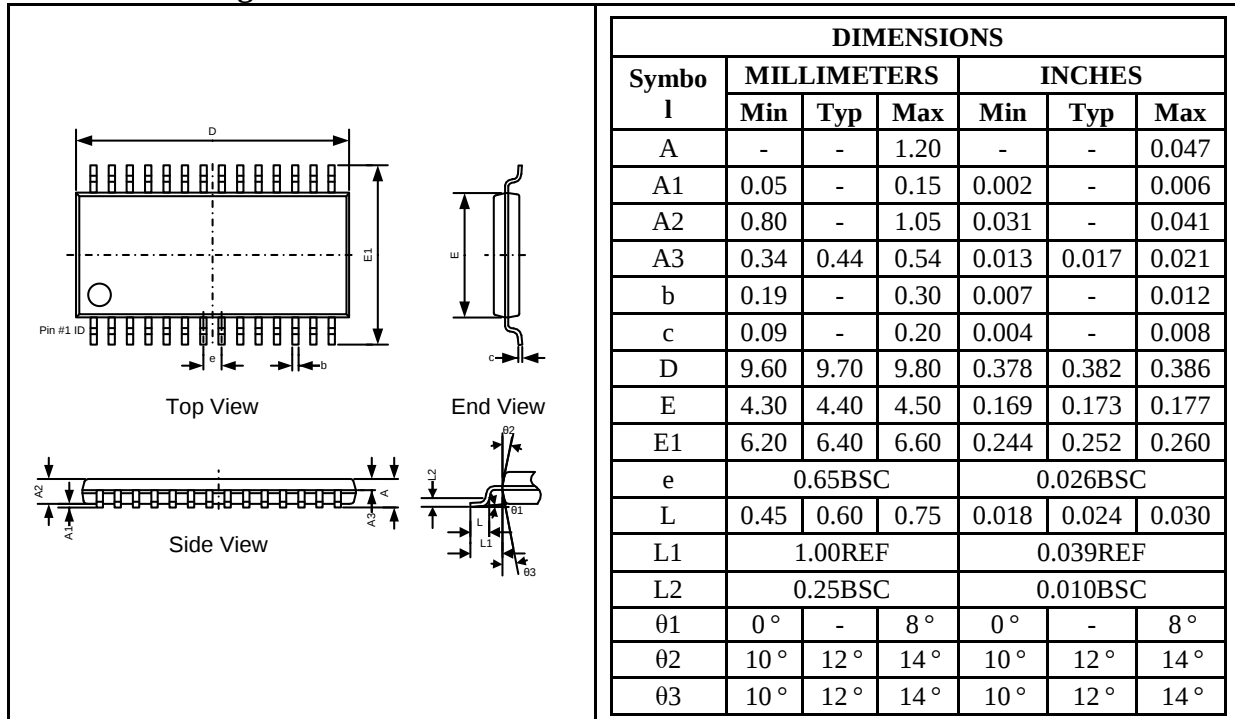

Land Pattern

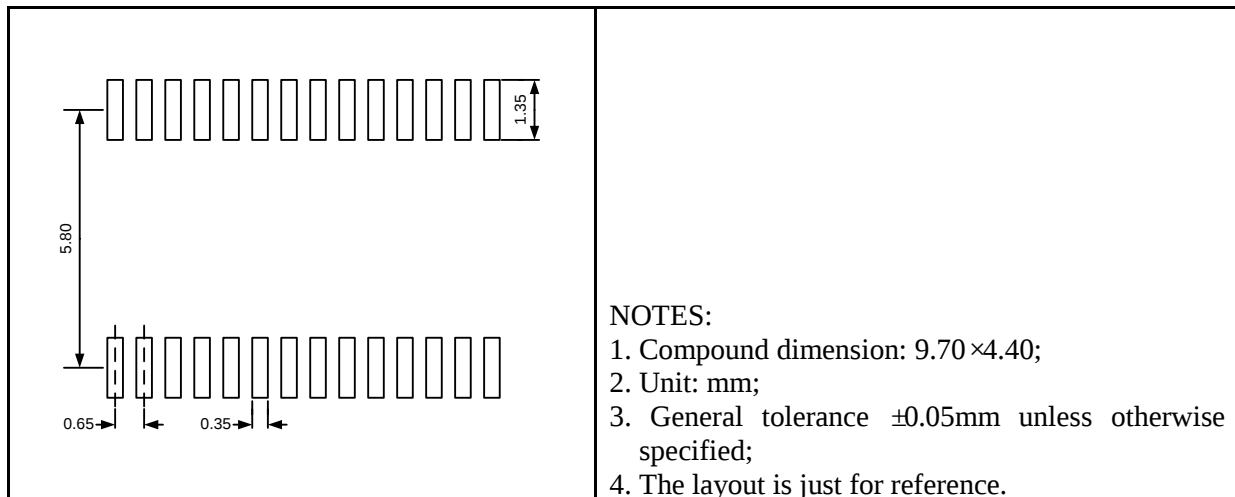

Tape and Reel Orientation



GREEN COMPLIANCE

Union Semiconductor is committed to environmental excellence in all aspects of its operations including meeting or exceeding regulatory requirements with respect to the use of hazardous substances. Numerous successful programs have been implemented to reduce the use of hazardous substances and/or emissions.

All Union components are compliant with the RoHS directive, which helps to support customers in their compliance with environmental directives. For more green compliance information, please visit:

http://www.union-ic.com/index.aspx?cat_code=RoHSDeclaration

IMPORTANT NOTICE

The information in this document has been carefully reviewed and is believed to be accurate. Nonetheless, this document is subject to change without notice. Union assumes no responsibility for any inaccuracies that may be contained in this document, and makes no commitment to update or to keep current the contained information, or to notify a person or organization of any update. Union reserves the right to make changes, at any time, in order to improve reliability, function or design and to attempt to supply the best product possible.