

用于开漏和推挽应用的 8 位双向电压电平转换器

UM3208H CSP20 2.4×1.9**UM3208QA QFN20 4.5×3.5****UM3208QB QFN20 3.0×3.0****UM3208UK TSSOP20**

描述

UM3208 是一款带 ESD 保护的 8 通道电平转换器，提供允许数据在多压系统中传输所需的电平转换。外部应用电压 V_{CCB} 和 V_{CCA} 用来在器件任一端侧设置逻辑电平。器件 V_{CCA} 端侧的低压逻辑信号在 V_{CCB} 端侧转为高压逻辑信号，反之亦然。UM3208 为双向电平转换器，利用基于传输门的设计来允许任意单根数据线上的双向($V_{CCA} \leftrightarrow V_{CCB}$)数据传输。UM3208 的 V_{CCA} 电压范围为+1.65V 至+3.6V； V_{CCB} 电压范围为+2.3V 至+5.5V，此系列的芯片理想用于低压 ASIC/PLD 与较高压系统间的数据传输。

当输出使能 (OE) 输入为低电平时，UM3208 进入高阻态输出模式，以减小供电电流。UM3208 旨在由 V_{CCA} 为 OE 输入电路供电。芯片在 V_{CCB} 侧具有 $\pm 6\text{kV}$ ESD 保护，为外部信号切换应用场合提供 stronger 的保护。

UM3208H 采用 CSP20 2.4×1.9 凸点封装，特别采用晶圆背面镀膜工艺，使芯片更加坚固耐用。UM3208UK 采用 TSSOP20 封装，UM3208QA 采用 QFN20 4.5×3.5 封装，UM3208QB 采用 QFN20 3.0×3.0 封装。








应用

特性

- SPI, MICROWIRE, and I²C 电平转换
- 低电压 ASIC 电平转换
- 智能读卡器
- 手机支架
- 便携式 POS 系统
- 便携式通信设备
- 低成本串行接口
- 蜂窝电话
- GPS
- 通信设备
- 最大数据速率：
24Mbps(推挽)
2Mbps(开漏)
- 双向电平转换
- A 端口输入电压范围为 1.65V 至 3.6V
B 端口输入电压范围为 2.3V 至 5.5V
($V_{CCA} \leq V_{CCB}$)
- B 端口提供 $\pm 6\text{kV}$ ESD 保护
- 闩锁性能 (Latch-Up) 超过 100mA
- 无需电源排序， V_{CCA} 或 V_{CCB} 均可优先斜升
- 低功耗

Pin Configurations

Top View

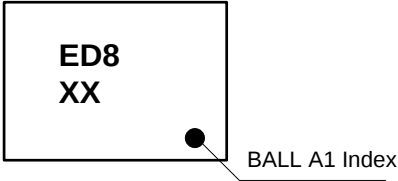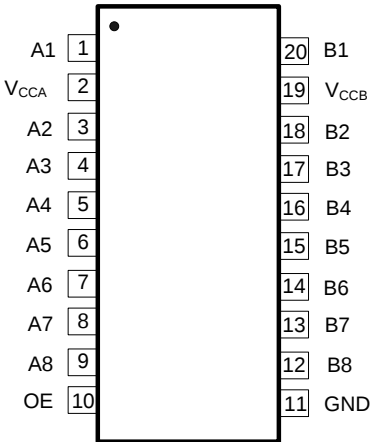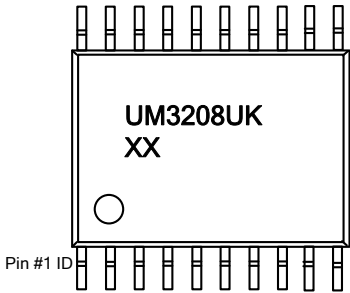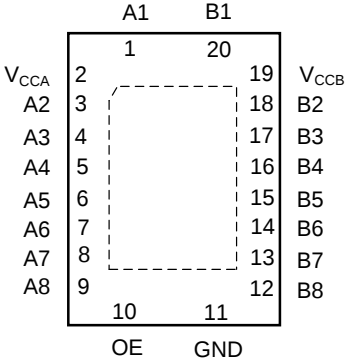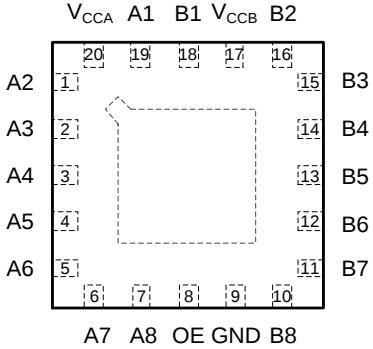(Bottom View) 	 XX: Week Code UM3208H CSP20 2.4×1.9
(Top View) 	 XX: Week Code UM3208UK TSSOP20
(Top View) 	 XX: Week Code UM3208QA QFN20 4.5×3.5
(Top View) 	 XX: Week Code UM3208QB QFN20 3.0×3.0

Ball Mapping for UM3208H

	5	4	3	2	1
D	B8	B6	B4	B2	V _{CCB}
C	GND	B7	B5	B3	B1
B	OE	A7	A5	A3	A1
A	A8	A6	A4	A2	V _{CCA}

Transparent Top View

Pin Description

Pin Name	Function
A1	Input/Output 1. Referenced to V _{CCA}
V _{CCA}	A-Port supply voltage. $1.65V \leq V_{CCA} \leq 3.6V$ and $V_{CCA} \leq V_{CCB}$
A2	Input/Output 2. Referenced to V _{CCA}
A3	Input/Output 3. Referenced to V _{CCA}
A4	Input/Output 4. Referenced to V _{CCA}
A5	Input/Output 5. Referenced to V _{CCA}
A6	Input/Output 6. Referenced to V _{CCA}
A7	Input/Output 7. Referenced to V _{CCA}
A8	Input/Output 8. Referenced to V _{CCA}
OE	3-state output enable. Pull OE low to place all outputs in 3-state mode. Referenced to V _{CCA}
GND	Ground
B8	Input/Output 8. Referenced to V _{CCB}
B7	Input/Output 7. Referenced to V _{CCB}
B6	Input/Output 6. Referenced to V _{CCB}
B5	Input/Output 5. Referenced to V _{CCB}
B4	Input/Output 4. Referenced to V _{CCB}
B3	Input/Output 3. Referenced to V _{CCB}
B2	Input/Output 2. Referenced to V _{CCB}
V _{CCB}	B-Port supply voltage. $2.3V \leq V_{CCB} \leq 5.5V$
B1	Input/Output 1. Referenced to V _{CCB}

Ordering Information

Part Number	Packaging Type	Marking Code	Shipping Qty
UM3208H	CSP20 2.4×1.9	ED8	3000pcs/7Inch Tape & Reel
UM3208UK	TSSOP20	UM3208UK	3000pcs/13Inch Tape & Reel
UM3208QA	QFN20 4.5×3.5	UM3208QA	
UM3208QB	QFN20 3.0×3.0	UM3208	

Absolute Maximum Ratings (Note 1)

Over operating free-air temperature range (unless otherwise noted)

Symbol	Parameter		Value	Unit
V_{CCA}	Supply Voltage Range		-0.5 to +4.5	V
V_{CCB}	Supply Voltage Range		-0.5 to +6.5	V
V_I	Input Voltage Range	A ports	-0.5 to +4.5	V
		B ports	-0.5 to +6.5	
V_O	Voltage Range applied to any output in the high-impedance or power-off state	A ports	-0.5 to +4.5	V
		B ports	-0.5 to +6.5	
V_O	Voltage Range applied to any output in the high or low state (Note 2)	A ports	-0.5 to ($V_{CCA}+0.5$)	V
		B ports	-0.5 to ($V_{CCB}+0.5$)	
I_{IK}	Input Clamp Current	$V_I < 0$	-50	mA
I_{OK}	Output Clamp Current	$V_O < 0$	-50	mA
I_O	Continuous Output Current		± 50	mA
	Continuous Current through V_{CCA} , V_{CCB} , or GND		± 100	mA
T_{OP}	Operating Temperature Range		-40 to +85	°C
T_J	Junction Temperature		-40 to +165	°C
T_{STG}	Storage Temperature Range		-65 to +150	°C

Note1. Stresses beyond those listed under "absolute maximum ratings" may cause permanent damage to the device. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those indicated under "recommended operating conditions" is not implied. Exposure to absolute-maximum-rated conditions for extended periods may affect device reliability.

Note2. The value of V_{CCA} and V_{CCB} are provided in the recommended operating conditions table.

Recommended Operating Conditions (Note 1, 2)

Symbol	Parameter		V _{CCA}	V _{CCB}	Min	Max	Unit
V _{CCA}	Supply Voltage				1.65	3.6	V
V _{CCB}					2.3	5.5	V
V _{IH}	High Level Input Voltage	A- Port	1.65V to 1.95V	2.3V to 5.5V	V _{CCI} -0.2	V _{CCI}	
			2.3V to3.6V		V _{CCI} -0.4	V _{CCI}	
		B- Port	1.65V to 3.6V	2.3V to 5.5V	V _{CCI} -0.4	V _{CCI}	V
					OE	V _{CCA} ×0.65	5.5
V _{IL}	Low Level Input Voltage	A- Port	1.65V to 3.6V	2.3V to 5.5V	0	0.15	
		B- Port			0	0.15	V
					OE	0	V _{CCA} ×0.35
		Δt/Δv			Input Transition Rise or Fall Time	A-Port push-pull driving	1.65V to 3.6V
B-Port push-pull driving	10						
Control input	10						

Note1. V_{CCI} is the supply voltage associated with the input port.

Note2. V_{CCA} must be less than or equal to V_{CCB} and must not exceed 3.6 V.

Thermal Information

Thermal Metric	UM3208H	UM3208QA	UM3208QB	UM3208UK	Unit
$R_{\theta JA}$	47	80.9	94.1	70	°C/W

Electrical Characteristics(Note 1, 2, 3)

Over recommended operating free-air temperature range (unless otherwise noted)

Parameter		Test Conditions	V _{CCA}	V _{CCB}	T _A =25°C		-40°C to 85°C		Unit
					Typ	Max	Min	Max	
V _{OHA}		I _{OH} =-20μA V _{IB} ≥V _{CCB} -0.4V	1.65V to 3.6V	2.3V to 5.5V			V _{CCA} ×0.8		V
V _{OLA}		I _{OL} =1mA V _{IB} ≤0.15V	1.65V to 3.6V	2.3V to 5.5V			0.2		V
V _{OHB}		I _{OH} =-20μA V _{IA} ≥V _{CCA} -0.2V	1.65V to 3.6V	2.3V to 5.5V			V _{CCB} ×0.8		V
V _{OLB}		I _{OL} =1mA V _{IA} ≤0.15V	1.65V to 3.6V	2.3V to 5.5V			0.2		V
I _I	OE	V _I =V _{CCI} or GND	1.65V to 3.6V	2.3V to 5.5V		±1		±2	μA
I _{OZ}	A or B Port	OE=V _{IL}	1.65V to 3.6V	2.3V to 5.5V		±1		±2	μA
I _{CCA}		V _I =V _O =open, I _O =0	1.65V to V _{CCB}	2.3V to 5.5V				2.4	μA
			3.6V	0V				2.2	
			0V	5.5V				-1	
I _{CCB}		V _I =V _O =open, I _O =0	1.65V to V _{CCB}	2.3V to 5.5V				12	μA
			3.6V	0V				-1	
			0V	5.5V				1	
I _{CCA} +I _{CCB}		V _I =V _O =open, I _O =0	1.65V to 3.6V	2.3V to 5.5V				14.4	μA
C _i	OE		3.3V	3.3V	2.5			3.5	pF
C _{iO}	A Port		3.3V	3.3V	5			6.5	pF
	B Port				12			16.5	

Note1. V_{CCI} is the supply voltage associated with the input port.

Note2. V_{CCO} is the supply voltage associated with the output port.

Note3. V_{CCA} must be less than or equal to V_{CCB} and must not exceed 3.6 V.

Timing Requirements

Over recommended operating free-air temperature range, V_{CCA}= 1.8V ± 0.15V (unless otherwise noted)

			V _{CCB} =2.5V ± 0.2V	V _{CCB} =3.3V ± 0.3V	V _{CCB} =5V ± 0.5V	Unit
			Min Max	Min Max	Min Max	
Data Rate	Push-pull driving		24	24	24	Mbps
	Open-drain driving		2	2	2	
t _w Pulse duration	Push-pull driving	Data inputs	41	41	41	ns
	Open-drain driving		500	500	500	

Timing Requirements

Over recommended operating free-air temperature range, V_{CCA}= 2.5V ± 0.2V (unless otherwise noted)

			V _{CCB} =2.5V ± 0.2V	V _{CCB} =3.3V ± 0.3V	V _{CCB} =5V ± 0.5V	Unit
			Min Max	Min Max	Min Max	
Data Rate	Push-pull driving		24	24	24	Mbps
	Open-drain driving		2	2	2	
t _w Pulse duration	Push-pull driving	Data inputs	41	41	41	ns
	Open-drain driving		500	500	500	

Timing Requirements

Over recommended operating free-air temperature range, $V_{CCA} = 3.3V \pm 0.3V$ (unless otherwise noted)

			V _{CCB} =3.3V ±0.3V		V _{CCB} =5V ± 0.5V		Unit
			Min	Max	Min	Max	
Data Rate	Push-pull driving		24		24		Mbps
	Open-drain driving		2		2		
t _w Pulse duration	Push-pull driving		41		41		ns
	Open-drain driving		500		500		

Switching Characteristics

Over recommended operating free-air temperature range, $V_{CCA} = 1.8V \pm 0.15V$ (unless otherwise noted)

Parameter	From (Input)	To (Output)	Test Conditions	V _{CCB} =2.5V ±0.2V		V _{CCB} =3.3V ±0.3V		V _{CCB} =5V± 0.5V		Unit
				Min	Max	Min	Max	Min	Max	
t _{PHL}	A	B	Push-pull	4.6		4.7		5.8		ns
t _{PLH}			Open-drain	2.9	8.8	2.9	9.6	3	10	
			Push-pull	6.8		6.8		7		
			Open-drain	45	260	36	208	27	198	
t _{PHL}	B	A	Push-pull	4.4		4.5		4.7		ns
t _{PLH}			Open-drain	1.9	5.3	1.1	4.4	1.2	4	
			Push-pull	5.3		4.5		0.5		
			Open-drain	45	175	36	140	27	102	
t _{en}	OE	A	200		200		200		ns	
		B	200		200		200			
t _{dis}	OE	A	50		40		35		ns	
		B	50		40		35			
t _{rA}	A port rise time		Push-pull	3.2	9.5	2.3	9.3	2	7.6	ns
			Open-drain	38	165	30	132	22	95	
t _{rB}	B port rise time		Push-pull	4	10.8	2.7	9.1	2.7	7.6	ns
			Open-drain	34	145	23	106	10	58	
t _{fA}	A port fall time		Push-pull	2	5.9	1.9	6	1.7	13.3	ns
			Open-drain	4.4	6.9	4.3	6.4	4.2	6.1	
t _{fB}	B port fall time		Push-pull	2.9	7.6	2.8	7.5	2.8	8.8	ns
			Open-drain	6.9	13.8	7.5	16.2	7	16.2	
t _{SK(O)}	Channel-to-Channel			1		1		1		ns
Max data rate			Push-pull	24		24		24		Mbps
			Open-drain	2		2		2		

Switching Characteristics

Over recommended operating free-air temperature range, $V_{CCA} = 2.5V \pm 0.2V$ (unless otherwise noted)

Parameter	From (Input)	To (Output)	Test Conditions	V _{CCB} =2.5V ±0.2V		V _{CCB} =3.3V ±0.3V		V _{CCB} =5V± 0.5V		Unit
				Min	Max	Min	Max	Min	Max	
t _{PHL}	A	B	Push-pull	3.2		3.3		3.4		ns
t _{PLH}			Open-drain	1.7	6.3	2	6	2.1	5.8	
			Push-pull	3.5		4.1		4.4		
			Open-drain	43	250	36	206	27	190	
t _{PHL}	B	A	Push-pull	3		3.6		4.3		ns
t _{PLH}			Open-drain	1.8	4.7	2.6	4.2	1.2	4	
			Push-pull	2.5		1.6		0.7		
			Open-drain	44	170	37	140	27	103	
t _{en}	OE	A		200		200		200		ns
		B		200		200		200		
t _{dis}	OE	A		50		40		35		ns
		B		50		40		35		
t _{rA}	A port rise time		Push-pull	2.8	7.4	2.6	6.6	1.8	5.6	ns
			Open-drain	34	149	28	121	24	89	
t _{rB}	B port rise time		Push-pull	3.2	8.3	2.9	7.2	2.4	6.1	ns
			Open-drain	35	151	24	112	12	64	
t _{fA}	A port fall time		Push-pull	1.9	5.7	1.9	5.5	1.8	5.3	ns
			Open-drain	4.4	6.9	4.3	6.2	4.2	5.8	
t _{fB}	B port fall time		Push-pull	2.2	7.8	2.4	6.7	2.6	6.6	ns
			Open-drain	5.1	8.8	5.4	9.4	5.4	10.4	
t _{SK(O)}	Channel-to-channel 1			1		1		1		ns
Max data rate			Push-pull	24		24		24		Mbps
			Open-drain	2		2		2		

Switching Characteristics

Over recommended operating free-air temperature range, $V_{CCA} = 3.3V \pm 0.3V$ (unless otherwise noted)

Parameter	From (Input)	To (Output)	Test Conditions	V _{CCB} =3.3V ±0.3V		V _{CCB} =5V ± 0.5V		Unit
				Min	Max	Min	Max	
t _{PHL}	A	B	Push-pull	2.4		3.1		ns
t _{PLH}			Open-drain	1.2	4.2	1.4	4.6	
			Push-pull	4.2		4.4		
			Open-drain	36	204	28	165	
t _{PHL}	B	A	Push-pull	2.5		3.3		ns
t _{PLH}			Open-drain	1	124	1	97	
			Push-pull	2.5		2.6		
			Open-drain	3	139	3	105	
t _{en}	OE	A	200		200		ns	
		B	200		200			
t _{dis}	OE	A	40		35		ns	
		B	40		35			
t _{rA}	A port rise time		Push-pull	2.3	5.6	1.9	4.8	ns
			Open-drain	25	116	19	85	
t _{rB}	B port rise time		Push-pull	2.5	6.4	2.1	7.4	ns
			Open-drain	26	116	14	72	
t _{fA}	A port fall time		Push-pull	2	5.4	1.9	5	ns
			Open-drain	4.3	6.1	4.2	5.7	
t _{fB}	B port fall time		Push-pull	2.3	7.4	2.4	7.6	ns
			Open-drain	5	7.6	4.8	8.3	
t _{SK(O)}	Channel-to-channel			1		1		ns
Max data rate			Push-pull	24		24		
			Open-drain	2		2		Mbps

Applications Information

The UM3208 can be used in level-translation applications for interfacing devices or systems operating at different interface voltages with one another. The UM3208 is ideal for use in application where an open-drain driver is connected to the data I/Os. The UM3208 can also be used in applications where a push-pull driver is connected to the data I/Os, but the UM3308 is better choice for push-pull applications.

Block Diagram

The UM3208 (block diagram see Figure 1) does not require a direction-control signal to control the direction of data flow from A to B or from B to A. Each A-port I/O has an internal 10-k Ω pull-up resistor to V_{CCA} , and each B-port I/O has an internal 10-k Ω pull-up resistor to V_{CCB} . During a rising edge, the one-shot turns on the PMOS transistors (PU1, PU2) for a short duration, which speeds up the low-to-high transition.

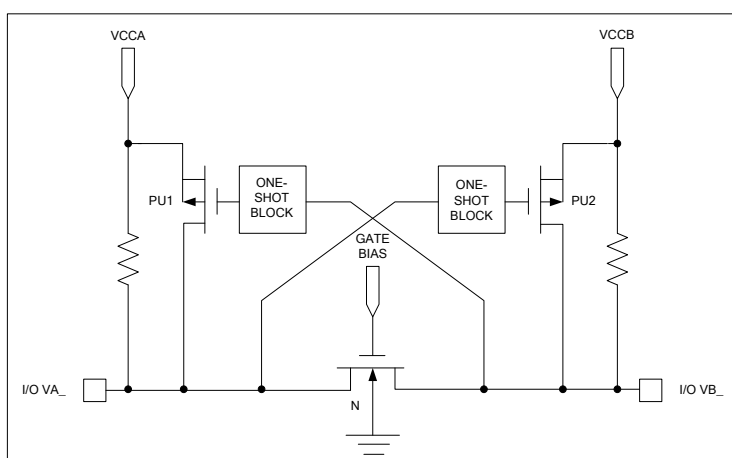


Figure 1 Block Diagram of UM3208 I/O Cell

Input Driver Requirements

The fall time (t_{fA} , t_{fB}) of a signal depends on the output impedance of the external device driving the data I/Os of the UM3208. Similarly, the t_{PHL} and the maximum data rates also depend on the output impedance of the external driver. The values for t_{fA} , t_{fB} , t_{PHL} , and the maximum data rates in the data sheet assume that the output impedance of the external driver is less than 50 Ω .

Power Up

During operation, ensure that $V_{CCA} \leq V_{CCB}$ at all times. During power-up sequencing, $V_{CCA} \geq V_{CCB}$ does not damage the device, so any power supply can be ramped up first.


Enable and Disable

The UM3208 has an OE input that is used to disable the device by setting OE = low, which places all I/Os in the high-impedance (Hi-Z) state. The disable time (t_{dis}) indicates the delay between the time when OE goes low and when the outputs actually get disabled (Hi-Z). The enable time (t_{en}) indicates the amount of time the user must allow for the one-shot circuitry to become operational after OE is taken high.

Pull-up or Pull-down Resistors on I/O Lines

Each A-port I/O has an internal 10-k Ω pull-up resistor to V_{CCA} , and each B-port I/O has an internal 10-k Ω pull-up resistor to V_{CCB} . If a smaller value of pull-up resistor is required, an external resistor must be added from the I/O to V_{CCA} or V_{CCB} (in parallel with the internal 10-k Ω resistor).

Test Circuits

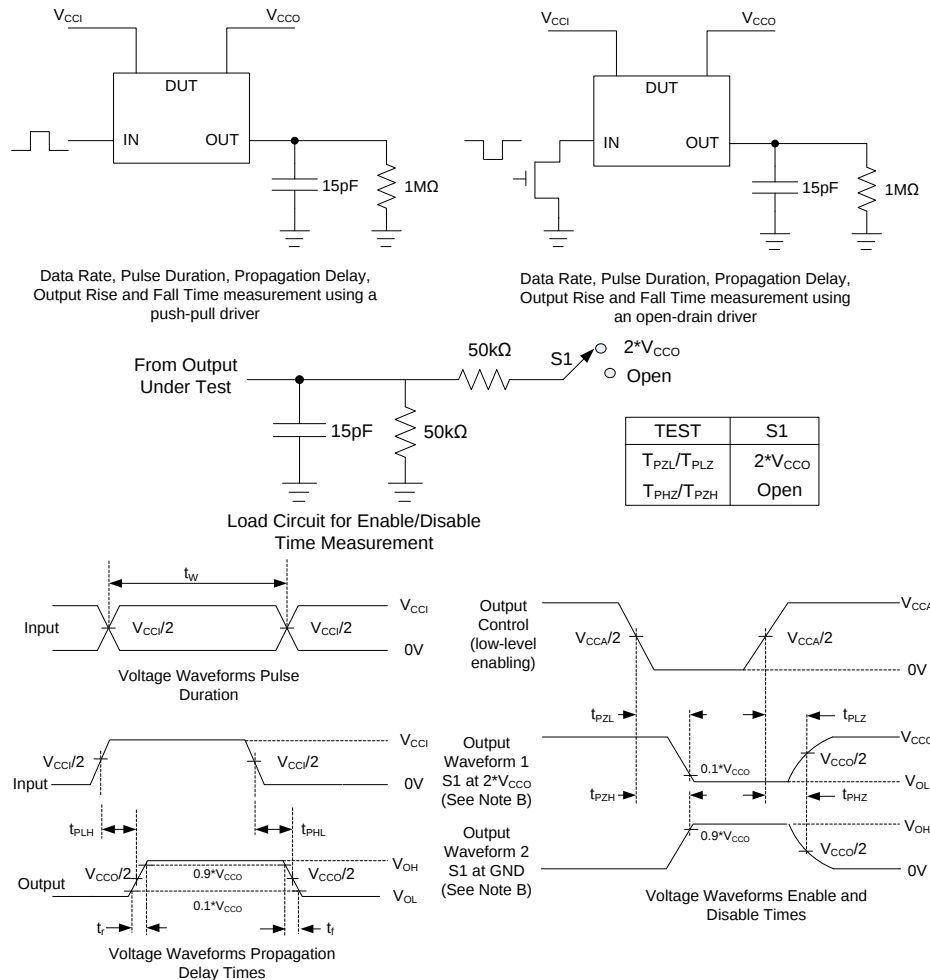

A. C_L includes probe and jig capacitances.

B. Waveform 1 is for an output with internal conditions such that the output is low, except when disabled by the output control.

Waveform 2 is for an output with internal conditions such that the output is high, except when disabled by the output control.

C. All input pulses are supplied by generators having the following characteristics: $PRR \leq 100\text{MHz}$, $Z_o = 50\Omega$, $dv/dt \geq 1\text{V/ns}$.

D. The outputs are measured one at a time, with one transition per measurement.

E. T_{PLZ} and T_{PHZ} are the same as t_{dis} .

F. T_{PZL} and T_{PZH} are the same as t_{en} .

G. T_{PLH} and T_{PHL} are the same as t_{pd} .


H. V_{CCI} is the V_{CC} associated with the input port.

I. V_{CCO} is the V_{CC} associated with the output port.


J. All parameters and waveforms are not applicable to all devices.

Figure 2 Load Circuits and Voltage Waveforms
Typical Characteristics


Low-level Output Voltage vs. Low-level Output Current

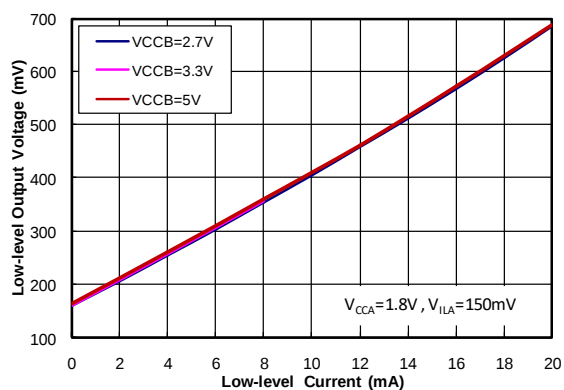


Low-level Output Voltage vs. Low-level Output Current

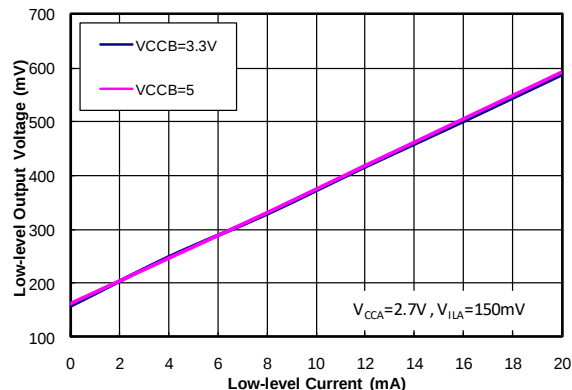


Low-level Output Voltage vs. Low-level Output Current

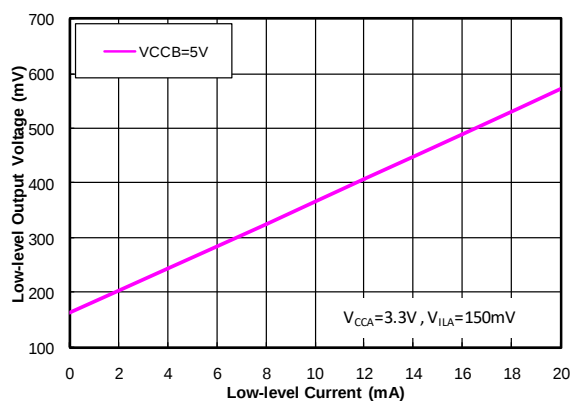


Low-level Output Voltage vs. Low-level Output Current

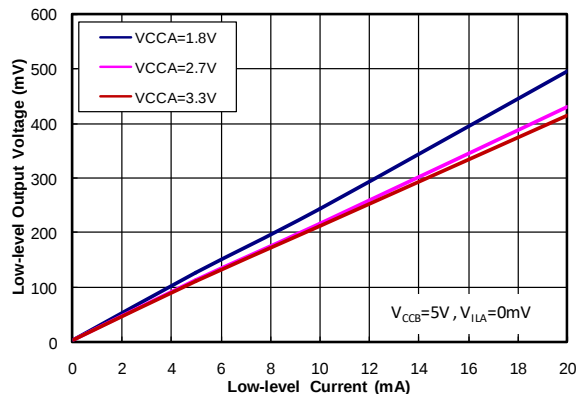

High-level Output Voltage vs. High-level Output Current

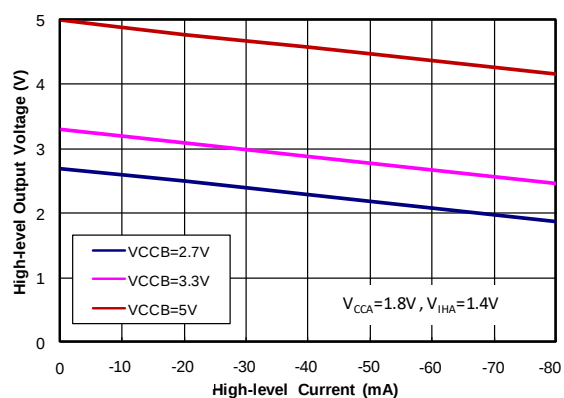


High-level Output Voltage vs. High-level Output Current

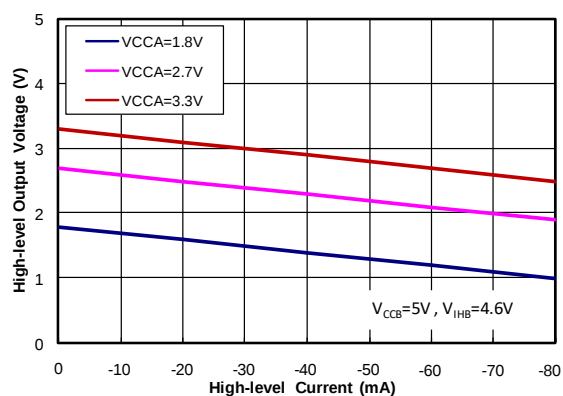


Package Information

CSP20 2.4×1.9

Outline Drawing

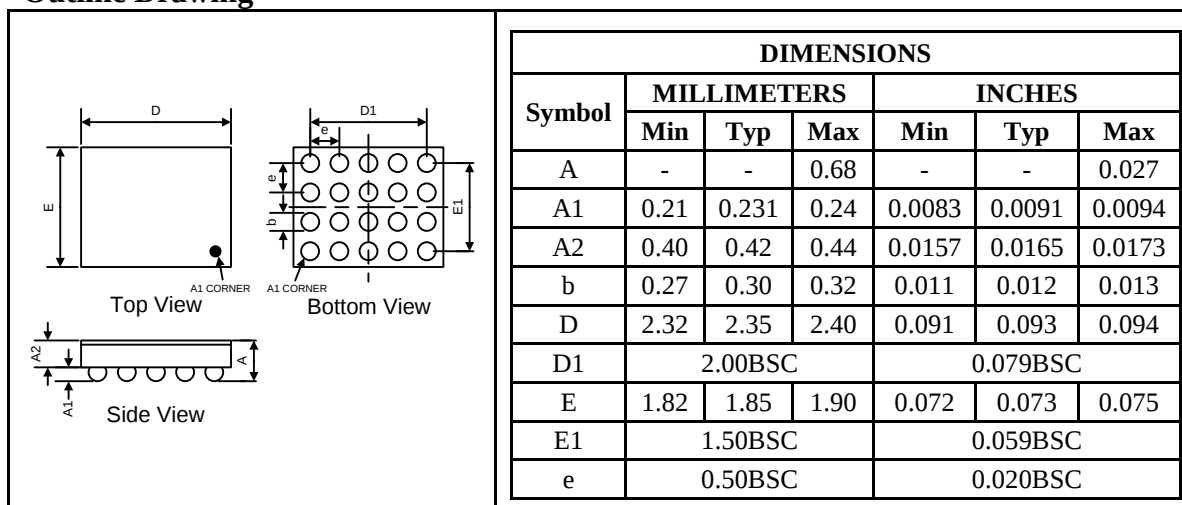


Land Pattern

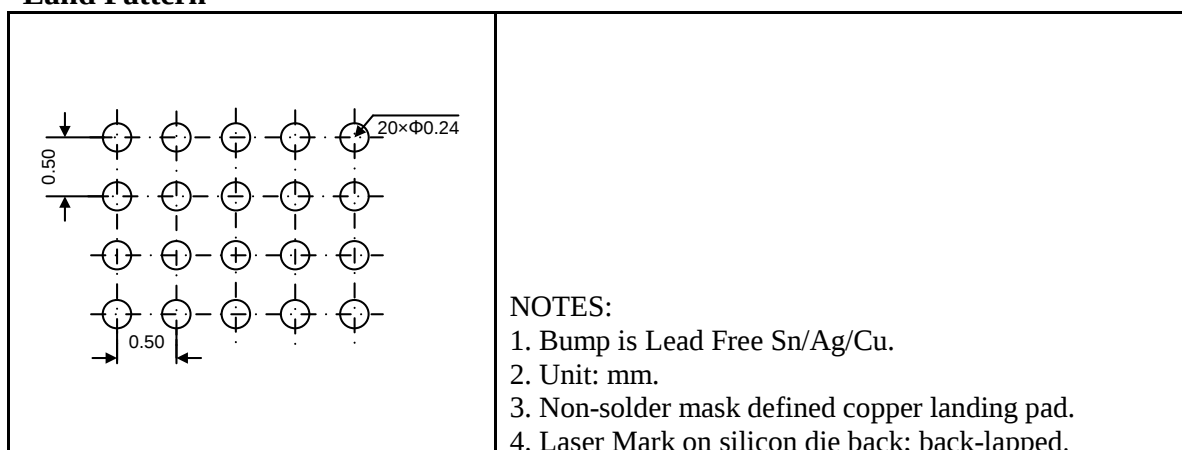


TSSOP20

Outline Drawing

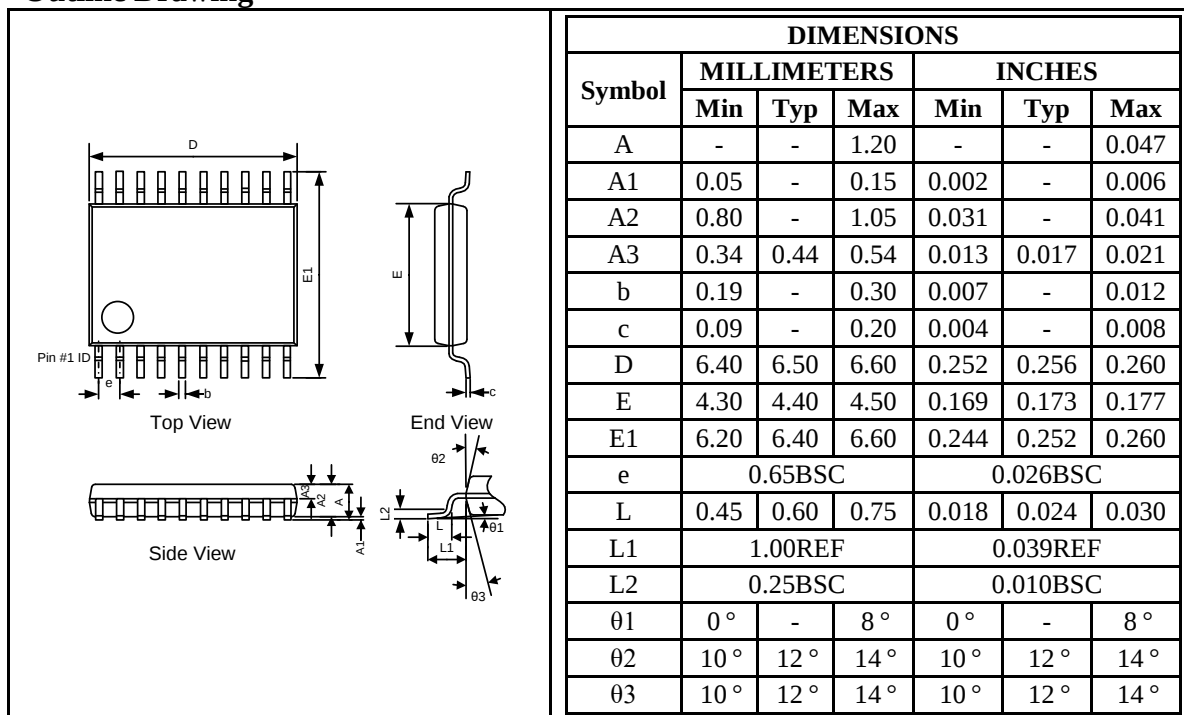

Land Pattern

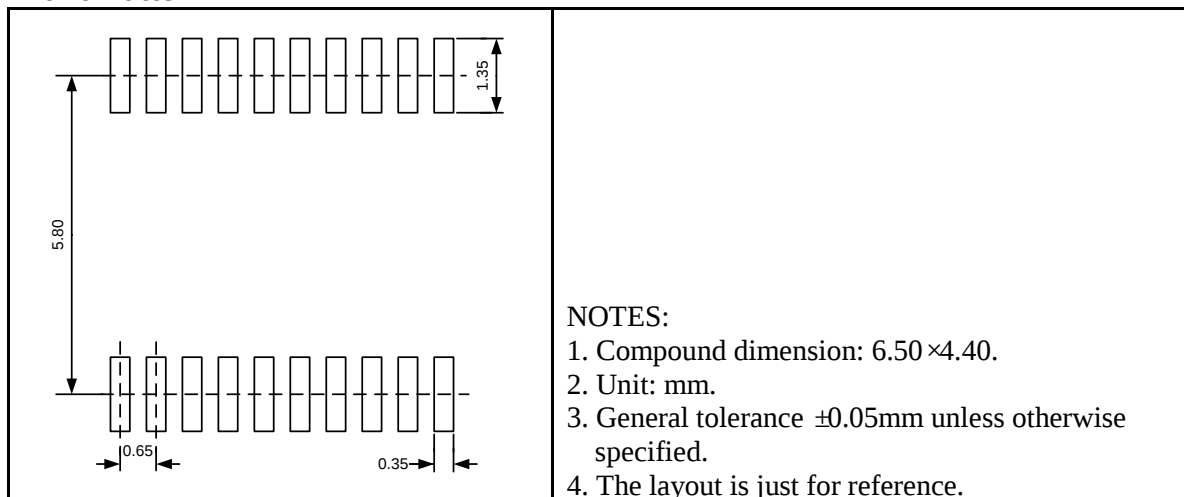


QFN20 4.5×3.5

Outline Drawing

DIMENSIONS						
Symbol	MILLIMETERS			INCHES		
	Min	Typ	Max	Min	Typ	Max
A	0.70	0.75	0.80	0.028	0.030	0.032
A1	-	0.02	0.05	-	0.0008	0.002
A3	-	0.20	-	-	0.008	-
b	0.20	0.25	0.30	0.008	0.010	0.012
D	4.50BSC			0.180BSC		
D2	2.60	2.70	2.80	0.104	0.108	0.112
E	3.50BSC			0.140BSC		
E2	1.60	1.70	1.80	0.064	0.068	0.072
e	0.50BSC			0.020BSC		
e1	1.50BSC			0.060BSC		
L	0.30	0.40	0.50	0.012	0.016	0.020

Land Pattern

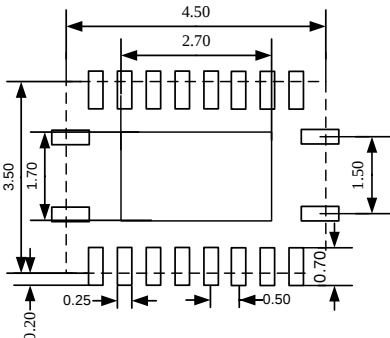
	NOTES: 1. Compound dimension: 4.50×3.50; 2. Unit: mm; 3. General tolerance $\pm 0.05\text{mm}$ unless otherwise specified; 4. The layout is just for reference.
---	--

QFN20 3.0×3.0


Outline Drawing

DIMENSIONS						
Symbol	MILLIMETERS			INCHES		
	Min	Typ	Max	Min	Typ	Max
A	0.70	0.75	0.80	0.028	0.030	0.032
A1	0	0.02	0.05	0	0.001	0.002
A3	0.20REF			0.008REF		
D	2.90	3.00	3.10	0.116	0.120	0.124
E	2.90	3.00	3.10	0.116	0.120	0.124
D1	1.40	1.50	1.60	0.056	0.060	0.064
E1	1.40	1.50	1.60	0.056	0.060	0.064
K	0.20MIN			0.008MIN		
b	0.15	0.20	0.25	0.006	0.008	0.010
e	0.40TYP			0.016TYP		
L	0.32	-	0.48	0.013	-	0.019

Land Pattern

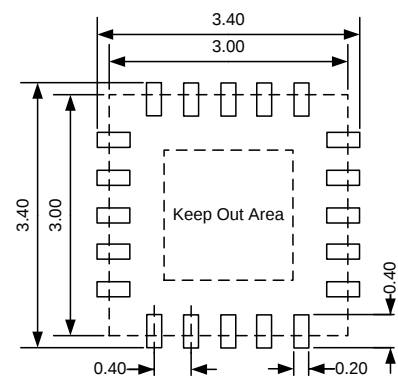	NOTES: 1. Compound dimension: 3.0×3.0; 2. Unit: mm; 3. General tolerance $\pm 0.05\text{mm}$ unless otherwise specified; 4. The layout is just for reference.
---	--

Packing Information

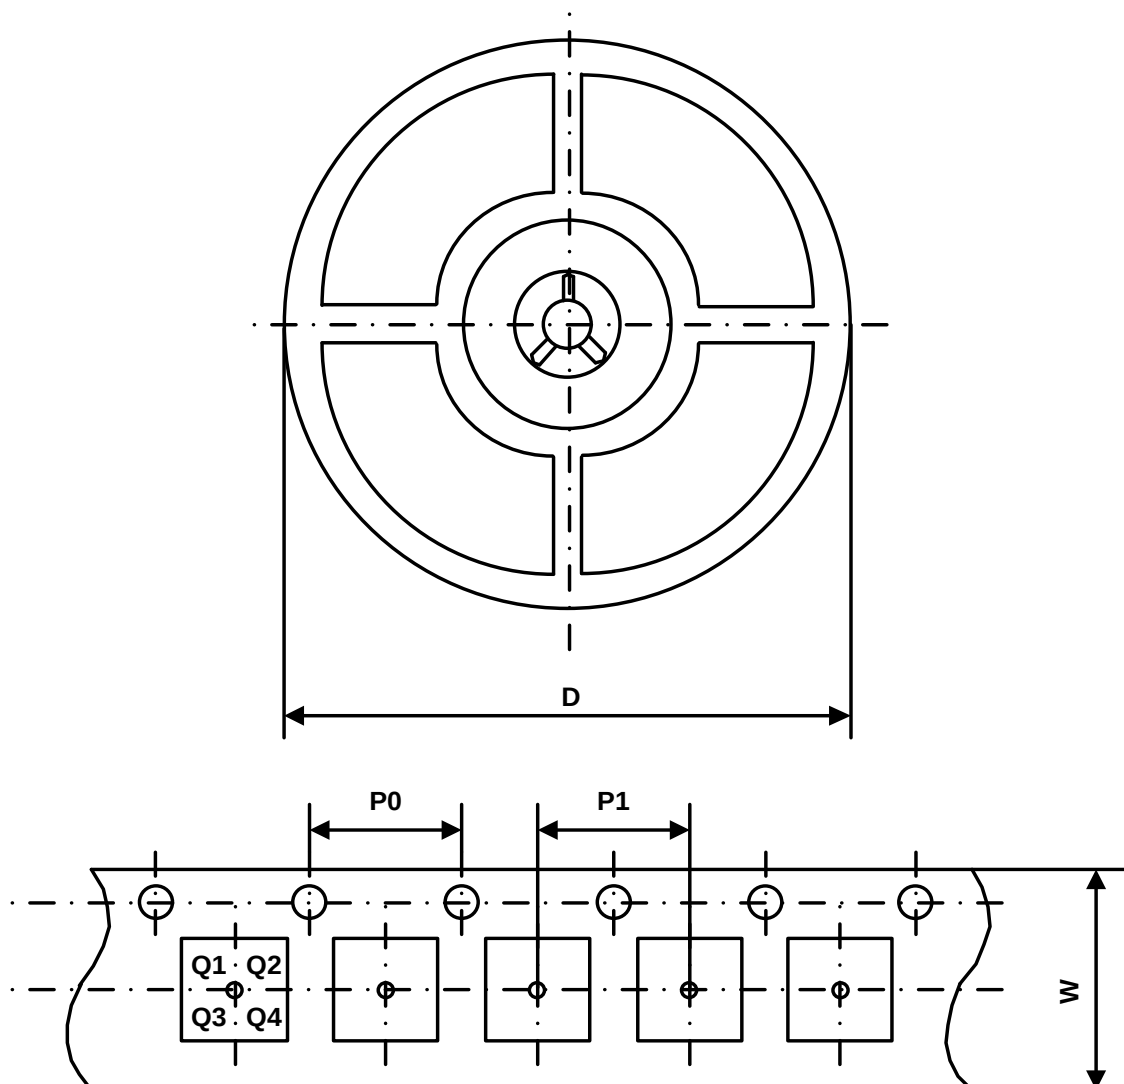

Part Number	Package Type	Carrier Width (W)	Pitch (P0)	Pitch (P1)	Reel Size (D)	PIN 1 Quadrant
UM3208H	CSP20 2.4×1.9	8 mm	4 mm	4 mm	180 mm	Q2
UM3208UK	TSSOP20	16 mm	4 mm	12 mm	330 mm	Q1
UM3208QA	QFN20 4.5×3.5	12 mm	4 mm	8 mm	330 mm	Q1
UM3208QB	QFN20 3.0×3.0	12 mm	4 mm	8 mm	330 mm	Q1

GREEN COMPLIANCE

Union Semiconductor is committed to environmental excellence in all aspects of its operations including meeting or exceeding regulatory requirements with respect to the use of hazardous substances. Numerous successful programs have been implemented to reduce the use of hazardous substances and/or emissions.

All Union components are compliant with the RoHS directive, which helps to support customers in their compliance with environmental directives. For more green compliance information, please visit:

http://www.union-ic.com/index.aspx?cat_code=RoHSDeclaration

IMPORTANT NOTICE

The information in this document has been carefully reviewed and is believed to be accurate. Nonetheless, this document is subject to change without notice. Union assumes no responsibility for any inaccuracies that may be contained in this document, and makes no commitment to update or to keep current the contained information, or to notify a person or organization of any update. Union reserves the right to make changes, at any time, in order to improve reliability, function or design and to attempt to supply the best product possible.