
单电源供电 RS-232 收发器**UM3232BEEUE TSSOP16****UM3232BEESE SOP16****UM3232BEEAE SSOP16****描述**

UM3232B系列是3.3V供电的RS-232收发器，适用于便携式或手持式应用。UM3232B具有两个驱动器和两个接收器。该器件具有低功耗、高数据速率能力和增强型ESD保护功能。所有发射器输出和接收器输入的ESD额定值在人体放电模式下为 $\pm 15\text{kV}$ ，在IEC61000-4-2空气间隙放电下为 $\pm 15\text{kV}$ ，在IEC61000-4-2接触放电下超过 $\pm 8\text{kV}$ 。逻辑I/O引脚能够耐受 $\pm 2\text{kV}$ 人体放电模式。

UM3232B 具备小占板面积和扁平封装，并使用 $0.1\mu\text{F}$ 电容，可节省电路板空间。在最大负载条件下，数据传输率大于 500kbps。该系列完全兼容纯 3.3V 系统、3.3V 和 5.0V 混合系统以及纯 5.0V 系统。

应用


- 工业自动化设备
- 电池供电设备
- 手持设备
- POS 终端

特性

- 通过+3.0V至+5.5V电源供电，符合真正的EIA/TIA-232-F标准
- 增强ESD规格:
 - $\pm 15\text{kV}$ 人体放电模型
 - $\pm 15\text{kV}$ IEC61000-4-2 空气间隙放电
 - $\pm 8\text{kV}$ IEC61000-4-2 接触放电
- 500kbps 最低传输速率
- 保证 $30\text{V}/\mu\text{s}$ 最大压摆率
- 闩锁性能(Latch-Up)超过200mA

Pin Configurations

Top View

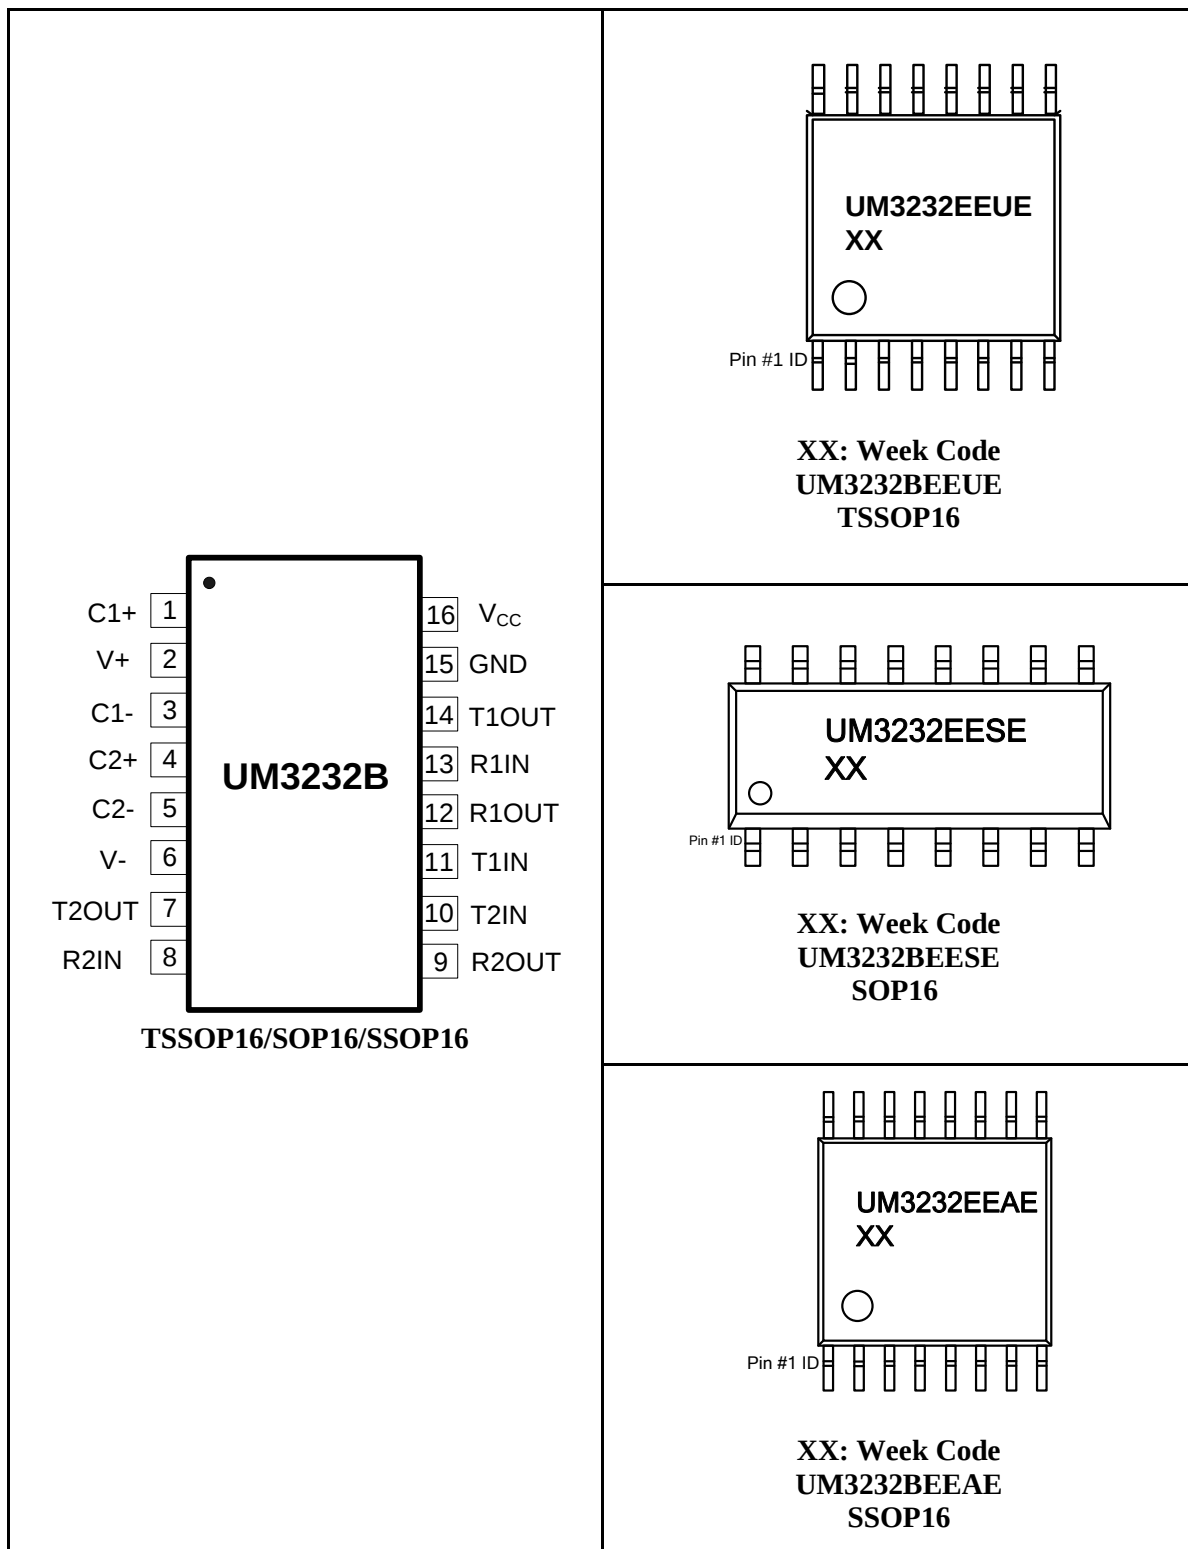

Pin Description

Pin No.	Pin Name	Function
1	C1+	Positive Terminals of Voltage-Doubler Charge Pump Capacitor
2	V+	Positive Voltage Generated by the Charge Pump
3	C1-	Negative Terminals of Voltage-Doubler Charge Pump Capacitor
4	C2+	Positive Terminals of Inverting Charge Pump Capacitor
5	C2-	Negative Terminals of Inverting Charge Pump Capacitor
6	V-	Negative Voltage Generated by the Charge Pump
7, 14	T_OUT	RS-232 Driver Outputs
8, 13	R_IN	RS-232 Receiver Inputs
9, 12	R_OUT	RS-232 Receiver Outputs
10, 11	T_IN	RS-232 Driver Inputs
15	GND	Ground
16	V _{CC}	+3.0V to +5.5V Supply Voltage Input

Ordering Information

Part Number	Temp. Range	Mark Code	Package Type	Shipping Qty
UM3232BEEUE	-40 ℃ to +85 ℃	UM3232EEUE	TSSOP16	3000pcs/13 Inch Tape & Reel
UM3232BEESE	-40 ℃ to +85 ℃	UM3232EESE	SOP16	2500pcs/13 Inch Tape & Reel
UM3232BEEAE	-40 ℃ to +85 ℃	UM3232EEAE	SSOP16	2000pcs/13 Inch Tape & Reel

Absolute Maximum Ratings (Note 1)

Symbol	Parameter		Value	Unit
V _{CC}	Supply Voltage on V _{CC}		-0.3 to +6	V
V ₊	Voltage on V ₊		(V _{CC} -0.3) to +7.5	V
V ₋	Voltage on V ₋		-7.5 to +0.3	V
T _{IN}	Voltage on T _{IN}		-0.3 to (V _{CC} +0.3)	V
R _{IN}	Voltage on R _{IN}		±25	V
T _{OUT}	Voltage on T _{OUT}		(V ₋ -0.3) to (V ₊ +0.3)	V
R _{OUT}	Voltage on R _{OUT}		-0.3 to (V _{CC} +0.3)	V
	Short-Circuit Duration, T _{OUT}		Continuous	
P _D	Continuous Power Dissipation at T _A =70 °C	TSSOP16	754	mW
		SOP16	696	
		SSOP16	775	
T _A	Operating Temperature Range		-40 to +85	°C
T _J	Junction Temperature Range		-40 to +125	°C
T _{STG}	Storage Temperature Range		-65 to +150	°C
T _L	Lead Temperature for Soldering 10 Seconds		+260	°C

Note 1: Stresses beyond those listed under “Absolute Maximum Ratings” may cause permanent damage to the device. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those indicated in the operational sections of the specifications is not implied. Exposure to absolute maximum rating conditions for extended periods may affect device reliability.

Electrical Characteristics

($V_{CC}=+3.0V$ to $+5.5V$, $C1-C4=0.1\mu F$, $T_A=T_{MIN}$ to T_{MAX} , unless otherwise noted. Typical values are at $T_A=25^\circ C$)

Parameter	Symbol	Conditions		Min	Typ	Max	Unit
DC CHARACTERISTICS (V _{CC} =+3.3V or +5V, T _A =25 °C)							
V _{CC} Supply Current	I _{CC}	No Load				2.5	mA
LOGIC INPUTS							
Input Leakage Current		T _{IN}				±1	μA
Input Threshold Low	V _{IL}	T _{IN}	V _{CC} =3.3V			0.8	V
			V _{CC} =5.0V			0.8	
Input Threshold High	V _{IH}	T _{IN}	V _{CC} =3.3V	1.6			V
			V _{CC} =5.0V	2.2			
Transmitter Input Hysteresis		V _{CC} =3.3V			0.2		V
		V _{CC} =5.0V			0.15		
RECEIVER OUTPUTS							
Output Voltage Low	V _{OL}	V _{CC} =3.3V, I _{OUT} =1.6mA				0.8	V
		V _{CC} =5.0V, I _{OUT} =1.6mA				0.8	
Output Voltage High	V _{OH}	V _{CC} =3.3V, I _{OUT} =-1.0mA		2.8			V
		V _{CC} =5.0V, I _{OUT} =-1.0mA		4.4			
RECEIVER INPUTS							
Input Voltage Range				-20		20	V
Input Threshold Low		T _A =+25 °C	V _{CC} =3.3V	0.8	1.15		V
			V _{CC} =5.0V	0.8	1.55		
Input Threshold High		T _A =+25 °C	V _{CC} =3.3V		1.35	2	V
			V _{CC} =5.0V		1.75	2	
Input Hysteresis					0.2		V
Input Resistance		T _A =+25 °C		3	5	7	kΩ
TRANSMITTER OUTPUTS							
Output Voltage Swing		All Drivers Loaded with 3kΩ to Ground		±5.0	±6.0		V
Output Short-Circuit Current		Short to V _{CC} , GND or Other TXD Pin	V _{CC} =3.3V		±30	±60	mA
			V _{CC} =5.0V		±40	±60	mA

Electrical Characteristics (Continued)

($V_{CC}=+3.0V$ to $+5.5V$, $C1-C4=0.1\mu F$, $T_A=T_{MIN}$ to T_{MAX} , unless otherwise noted. Typical values are at $T_A=25^\circ C$)

Parameter	Symbol	Conditions		Min	Typ	Max	Unit
TIMING CHARACTERISTICS							
Maximum Data Rate		R _L =3kΩ to 7kΩ, C _L =50pF to 1000pF, One Transmitter Switching		500			kbps
Receiver Propagation Delay	t _{PLH} , t _{PHL}	C _L =150pF Figure 1	All Parts, Normal Operation		0.15		μs
Receiver Skew	t _{PHL} -t _{PLH}					0.1	μs
Transmitter Propagation Delay	t _{PLH} , t _{PHL}	R _L =3kΩ, C _L =2500pF, All Transmitters Loaded Figure 1			0.9		μs
Transmitter Skew	t _{PHL} -t _{PLH}					0.1	μs
Transition-Region Slew Rate		T _A =+25 °C, V _{CC} =3.3V, R _L =3kΩ to 7kΩ, C _L =50pF to 1000pF, Measured from -3V to +3V or +3V to -3V, Figure 1		2.5	12	28	V/μs
ESD AND LATCH UP PERFORMANCE							
R_IN, T_OUT ESD-Protection Voltage		Human Body Model		±15		kV	
		IEC61000-4-2, Contact Discharge		±8			
		IEC61000-4-2, Air-Gap Discharge		±15			
Logic Pin ESD-Protection Voltage		Human Body Model		±2		kV	
Latch Up Performance		JEDEC Standard No.78D		±200		mA	

Detailed Description

Dual Charge-Pump Voltage Converter

The UM3232B's internal power supply consists of a regulated dual charge pump and provides output the maxim voltages of +7V (doubling charge pump) and -7V (inverting charge pump) over the +3.0V to +5.5V V_{CC} range. The charge pump operates in discontinuous mode; if the output voltages are less than 7V, the charge pump is enabled, and if the output voltages exceed 7V, the charge pump is disabled. The charge pumps require only four small, external 0.1 μ F capacitors for the voltage doubler and inverter functions (see Figure 2).

RS-232 Transmitters

The transmitters are inverting level translators that translate TTL/CMOS inputs to EIA/TIA-232 output levels. All UM3232B transmitters guarantee a 500kbps data rate for full load conditions (3k Ω and 1000pF). Transmitters can be paralleled to drive multiple receivers. When T_IN is not driven, UM3232B's T_IN logic level is on hold.

RS-232 Receivers

The receivers convert RS-232 signals to CMOS output levels and accept inputs up to ± 20 V while presenting the required 3k Ω to 7k Ω input impedance.

± 15 kV ESD Protection

All pins on UM3232B devices include ESD protection structures, but the family incorporates advanced structures which allow the RS-232 pins (transmitter outputs and receiver inputs) to survive ESD events up to ± 15 kV. The RS-232 pins are particularly vulnerable to ESD damage because they are typically connected to an exposed port on the exterior of the finished product. The ESD structures withstand high ESD in all states: normal operation and powered down. After an ESD event, circuits keep working without latch up. ESD protection can be tested in various ways; the transmitter outputs and receiver inputs are characterized for protection to the following limits: ± 15 kV using the Human Body Model, ± 8 kV using the Contact Discharge method specified in IEC61000-4-2, ± 15 kV using the Air-Gap Discharge method specified in IEC61000-4-2. The logic pins are characterized for protection to the following limit: ± 2 kV using the Human Body Model.

Test Circuits

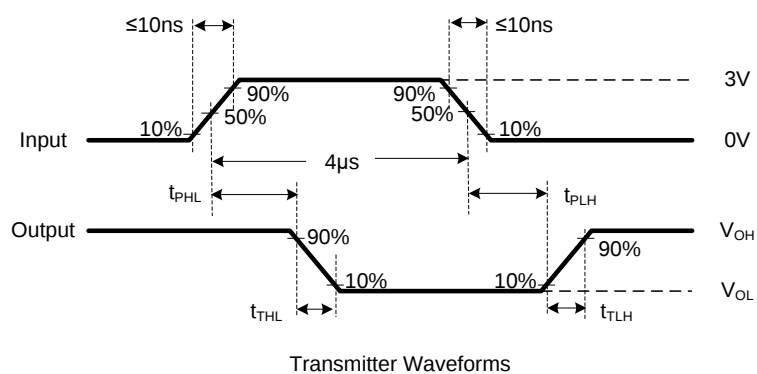
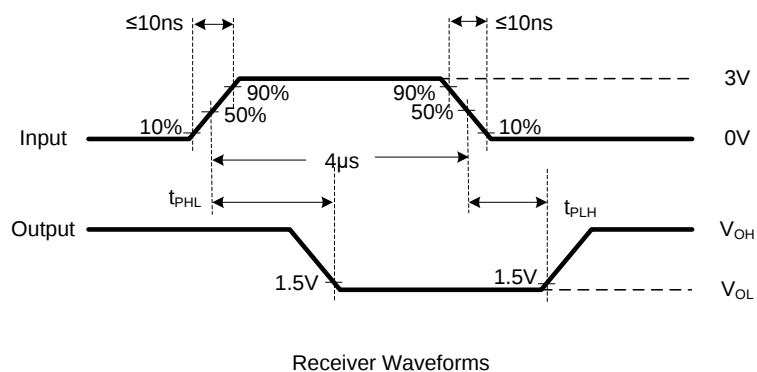
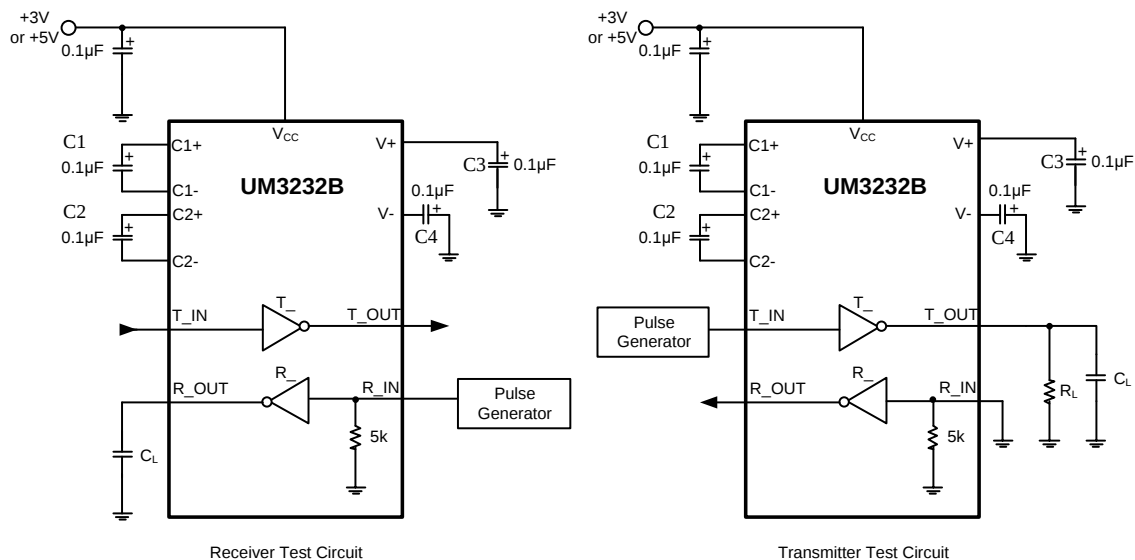


Figure 1

Typical Operating Circuits







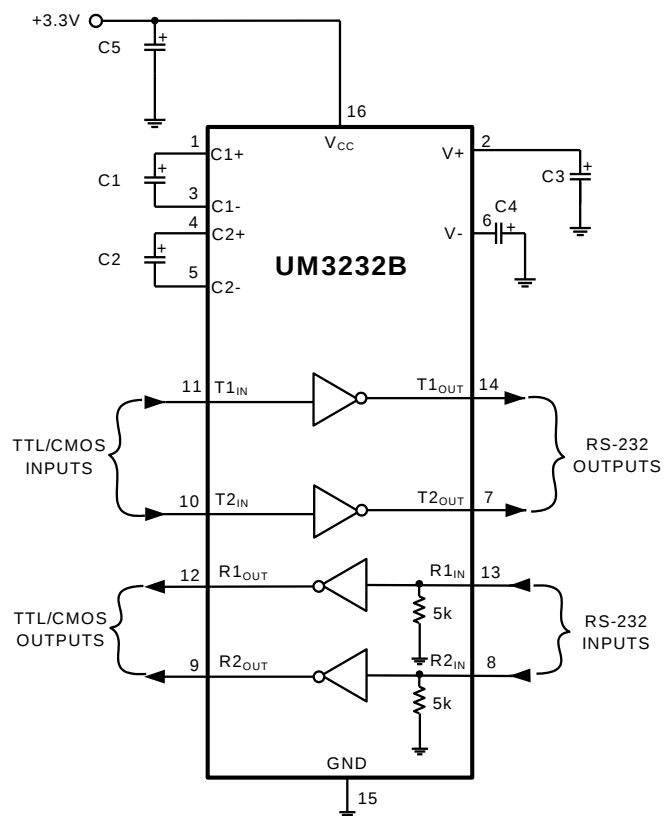


Figure 2

Typical Operating Characteristics

($V_{CC}=+3.3V$, 250kbps data rate, $0.1\mu F$ capacitors, all transmitters loaded with $3k\Omega$ and C_L , $T_A=25^\circ C$, unless otherwise noted.)

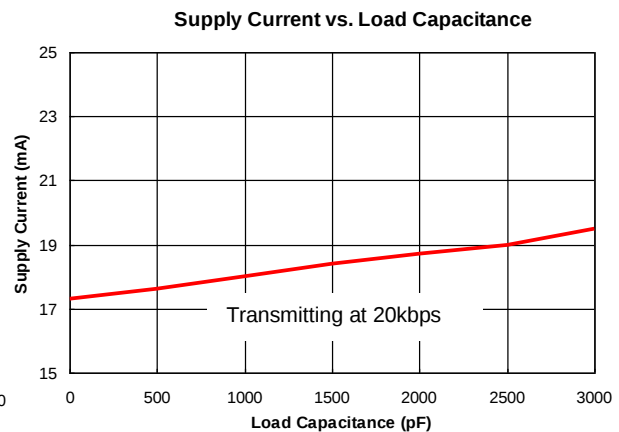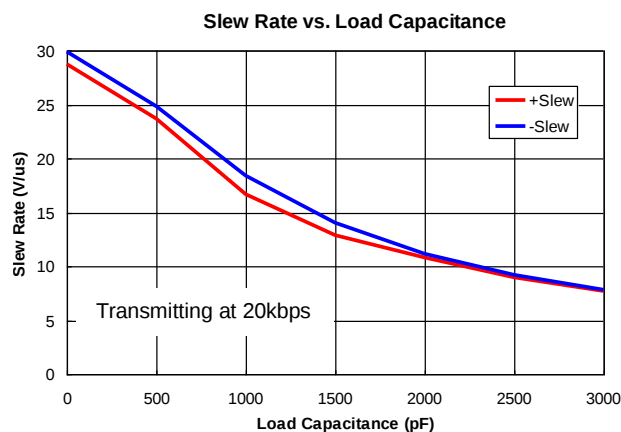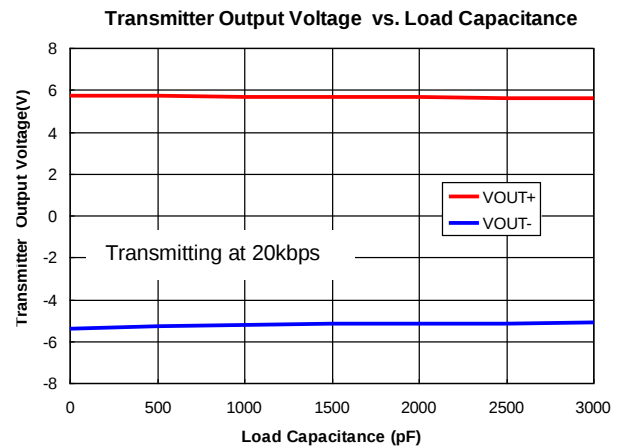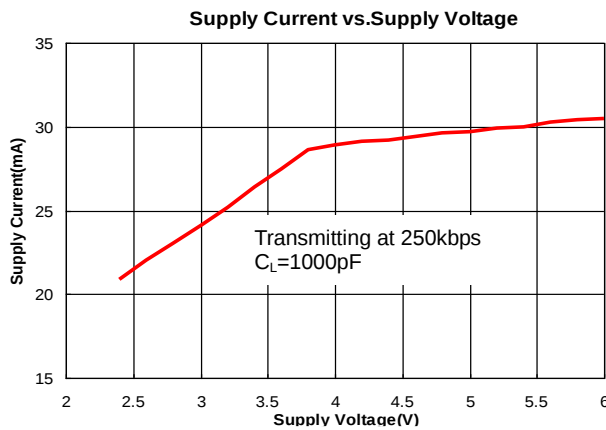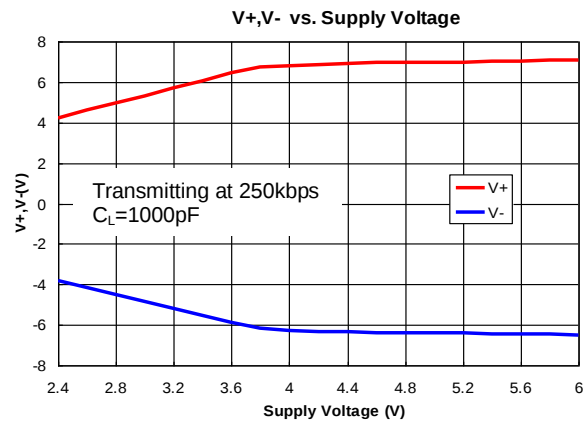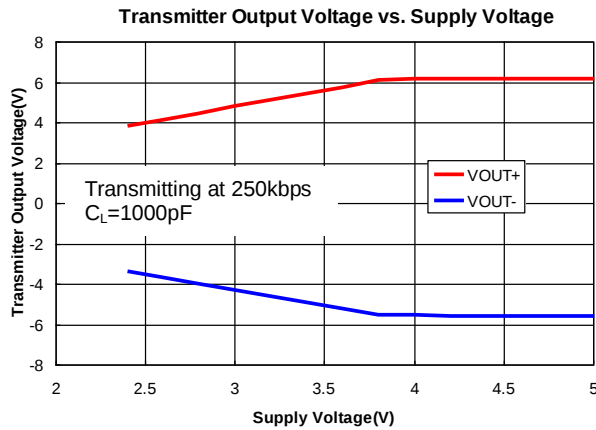

Applications Information

Capacitor Selection

The capacitor type used for C1–C4 is not critical for proper operation; polarized or non-polarized capacitors can be used. The charge pump requires 0.1 μ F capacitors for 3.3V operation. Increasing the capacitor values (e.g. by a factor of 2) reduces ripples on the transmitter outputs and slightly reduces power consumption. C2, C3 and C4 can be increased without changing C1's value. When using the minimum required capacitor values, make sure the capacitor value does not degrade excessively with temperature. If in doubt, use capacitors with a larger nominal value. The capacitor's equivalent series resistance (ESR), which usually rises at low temperatures, influences the amount of ripples on V+ and V- output voltages.

The following table shows some recommended minimum required pump capacitor values for different input voltage ranges.

Minimum Required Pump Capacitor Value	
Input Voltage V _{CC}	Charge Pump Capacitor Value for UM3232B
3.0V to 3.6V	C1–C4=0.1 μ F
3.0V to 5.5V	C1–C4=0.47 μ F

Power Supply Decoupling

In most circumstances, a 0.1 μ F V_{CC} bypass capacitor is adequate. In applications sensitive to power-supply noise, use a capacitor of the same value as charge pump capacitor C1. Connect bypass capacitors to the IC as close as possible.


Interconnection with 3V and 5V Logic

The UM3232B can directly interface with various 3V and 5V logic families, including ACT and HCT CMOS.


Package Information

TSSOP16

Outline Drawing

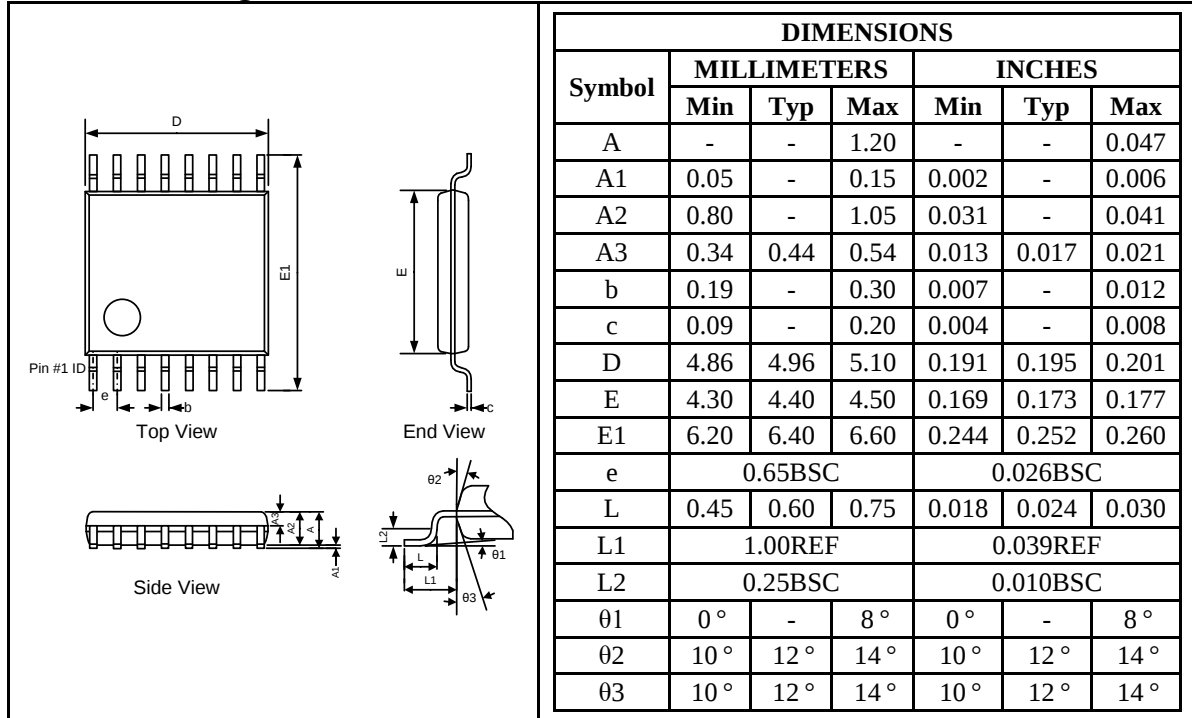

Land Pattern

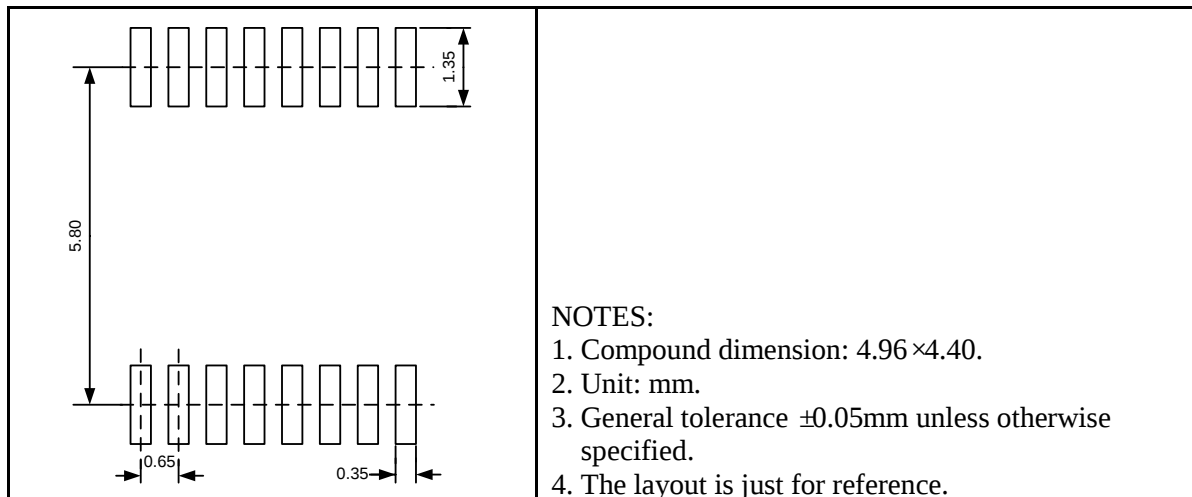


SOP16

Outline Drawing


DIMENSIONS						
Symbol	MILLIMETERS			INCHES		
	Min	Typ	Max	Min	Typ	Max
A	1.35	1.60	1.75	0.053	0.063	0.069
A1	0.10	-	0.25	0.004	-	0.010
A2	1.25	1.45	1.65	0.049	0.057	0.065
b	0.33	-	0.51	0.013	-	0.020
c	0.17	-	0.25	0.007	-	0.010
D	9.80	10.00	10.20	0.386	0.394	0.402
E	3.80	3.90	4.00	0.150	0.154	0.157
E1	5.80	6.00	6.20	0.228	0.236	0.244
e	1.27BSC			0.050BSC		
L	0.40	-	1.27	0.016	-	0.050
θ	0°	-	8°	0°	-	8°

Land Pattern

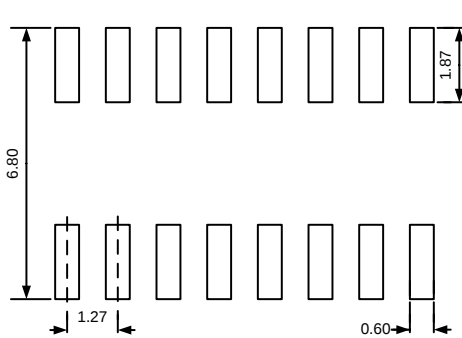
	NOTES: 1. Compound dimension: 10.00×3.90. 2. Unit: mm. 3. General tolerance $\pm 0.05\text{mm}$ unless otherwise specified. 4. The layout is just for reference.
---	---

SSOP16


Outline Drawing

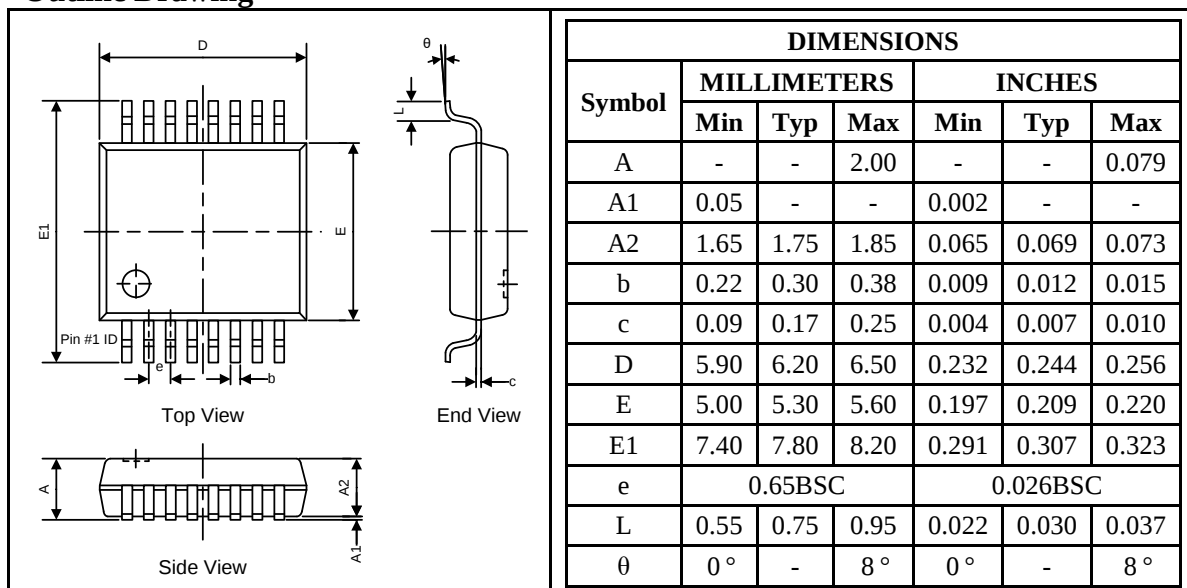

Land Pattern

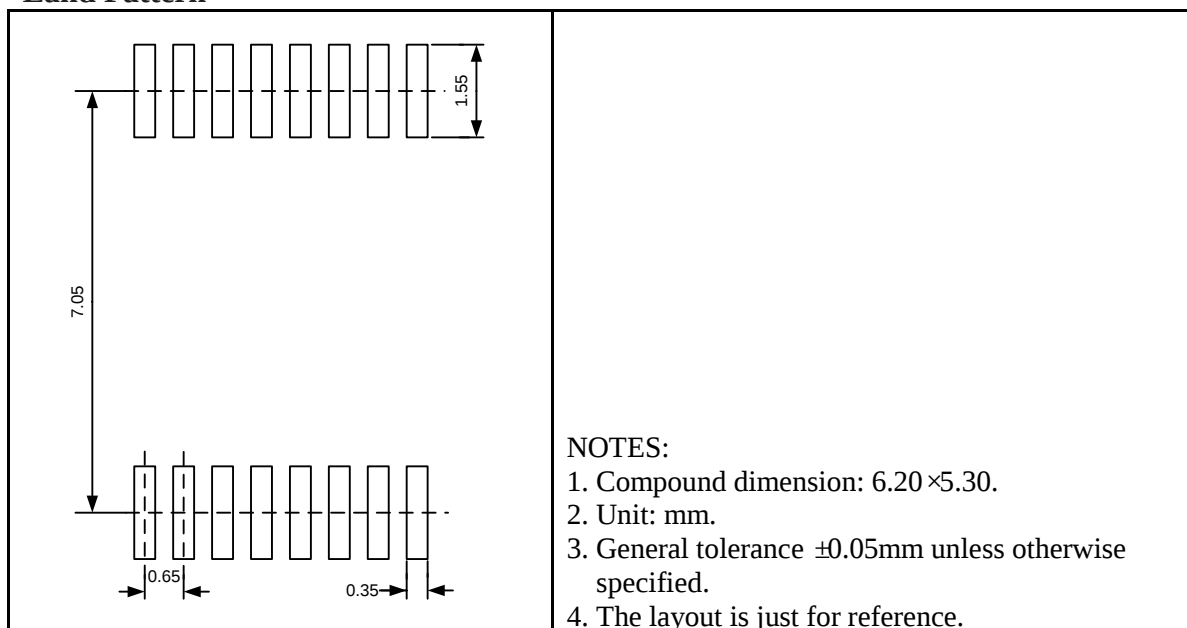

Packing Information

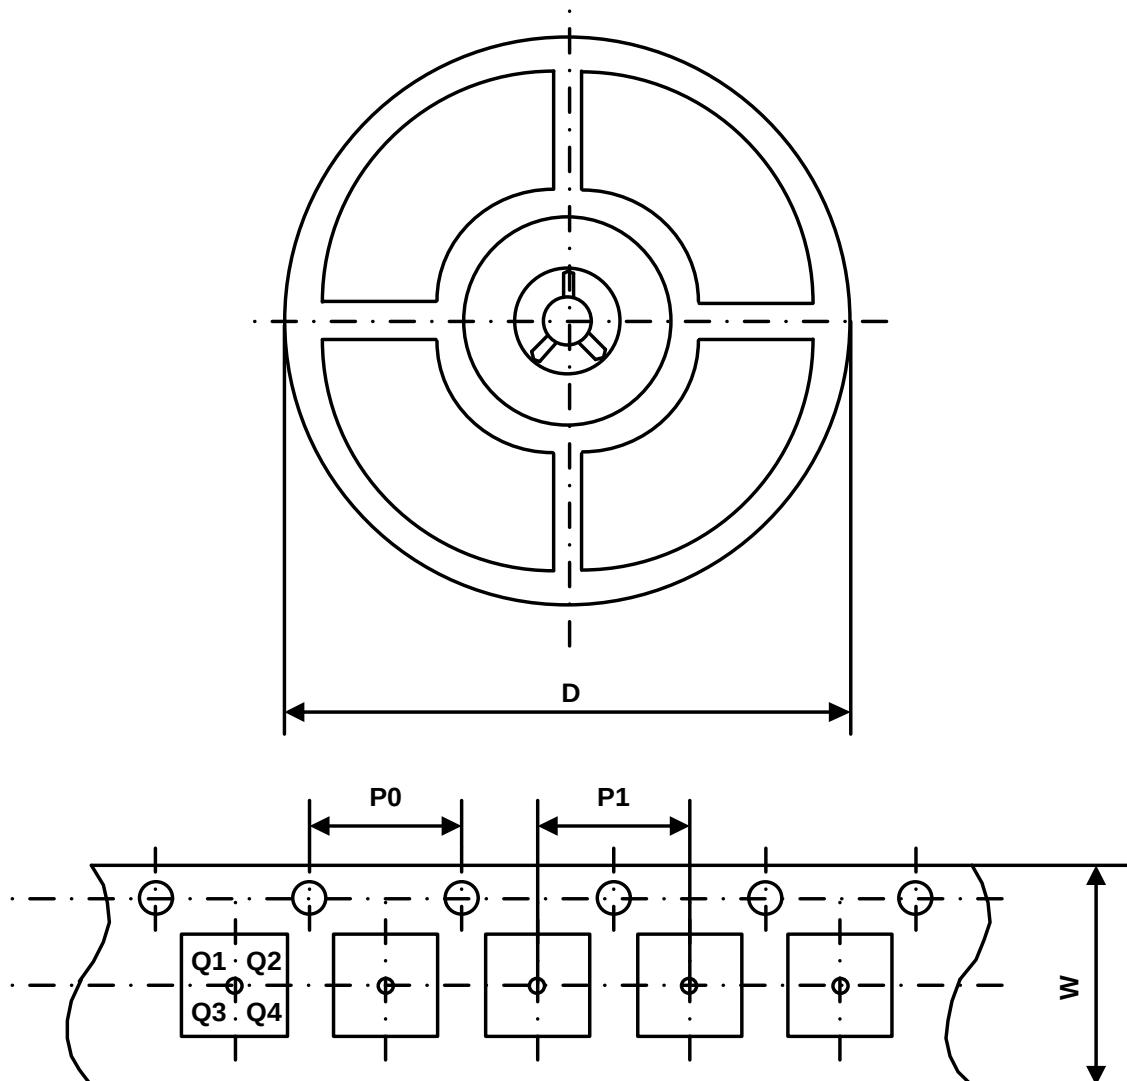

Part Number	Package Type	Carrier Width (W)	Pitch (P0)	Pitch (P1)	Reel Size (D)	PIN 1 Quadrant
UM3232BEEUE	TSSOP16	16 mm	4 mm	8 mm	330 mm	Q1
UM3232BEESE	SOP16	16 mm	4 mm	8 mm	330 mm	Q1
UM3232BEEAE	SSOP16	16 mm	4 mm	12 mm	330 mm	Q1

GREEN COMPLIANCE

Union Semiconductor is committed to environmental excellence in all aspects of its operations including meeting or exceeding regulatory requirements with respect to the use of hazardous substances. Numerous successful programs have been implemented to reduce the use of hazardous substances and/or emissions.

All Union components are compliant with the RoHS directive, which helps to support customers in their compliance with environmental directives. For more green compliance information, please visit:

http://www.union-ic.com/index.aspx?cat_code=RoHSDeclaration

IMPORTANT NOTICE

The information in this document has been carefully reviewed and is believed to be accurate. Nonetheless, this document is subject to change without notice. Union assumes no responsibility for any inaccuracies that may be contained in this document, and makes no commitment to update or to keep current the contained information, or to notify a person or organization of any update. Union reserves the right to make changes, at any time, in order to improve reliability, function or design and to attempt to supply the best product possible.